

## **Going to Production with the bq275xx**

David Maxwell

### **ABSTRACT**

This application report presents a strategy for high-speed and economical calibration and production programming of the bq27500/1 single-cell, gas gauge chipset. Flowchart examples are provided, along with step-by-step instructions for preparing a calibration data set that is required when creating the Golden Data Flash Image (DFI) that is programmed into all bq27500/1 devices at the original equipment manufacturer (OEM) production line.

This is applicable to all system side single cell gas gauge devices

### **Contents**

1	Introduction .....	1
2	Determining Data Flash Constants .....	1
3	STEP 1: Characterize the Calibration Process .....	3
4	STEP 2: Using bqEASY for Production Preparation .....	4
5	STEP 3: Data Flash Review .....	7
6	STEP 4: Writing the DFI at Production .....	8

### **List of Figures**

1	DFI Creation Flow.....	2
2	bq27500 EVSW Calibration Data Flash Screen .....	3
3	bq27500 EVSW Calibration Screen .....	4
4	bqEASY .....	5
5	Load Connection for Automated Discharge .....	6
6	bqEASY Process Flowchart .....	7
7	bq2750x Production Flow .....	8
8	Instruction Flash First Two Row Record and Erase Flow .....	9
9	DFI Write Flow .....	10
10	Instruction Flash First Two Row Reprogram Flow .....	11

## **1 Introduction**


The bq27500/1 gas gauge is built with new technology and a new architecture for both data flash access and calibration. With this new architecture, unit production cost and capital equipment investment can be minimized, as there is no longer a need to perform a learning cycle on each pack. A single *golden data flash image* file (DFI) can be used to program each bq27500/1 in production. Also, the calibration method is quick and simple because most of the calibration routines are built into the firmware of the target device or can be based on average values.

## **2 Determining Data Flash Constants**

To configure the bq27500/1 for a given application, the data flash set must be programmed depending on the cell, application system, and charger. The application report entitled *Configuring the bq27500 Data Flash* ([SLUA432](#)) gives a detailed description of all the data flash constants that the user can modify. All bq27500/1 integrated circuits (IC) for an application must contain the same data flash values.

Impedance Track is a trademark of Texas Instruments.

The *golden data flash image* (DFI) is a file that contains all flash values and is used at the system application production line to program the bq27500/1. The DFI is programmed using I<sup>2</sup>C communication with the bq27500/1. Creating the DFI can be summarized with the process depicted in [Figure 1](#).

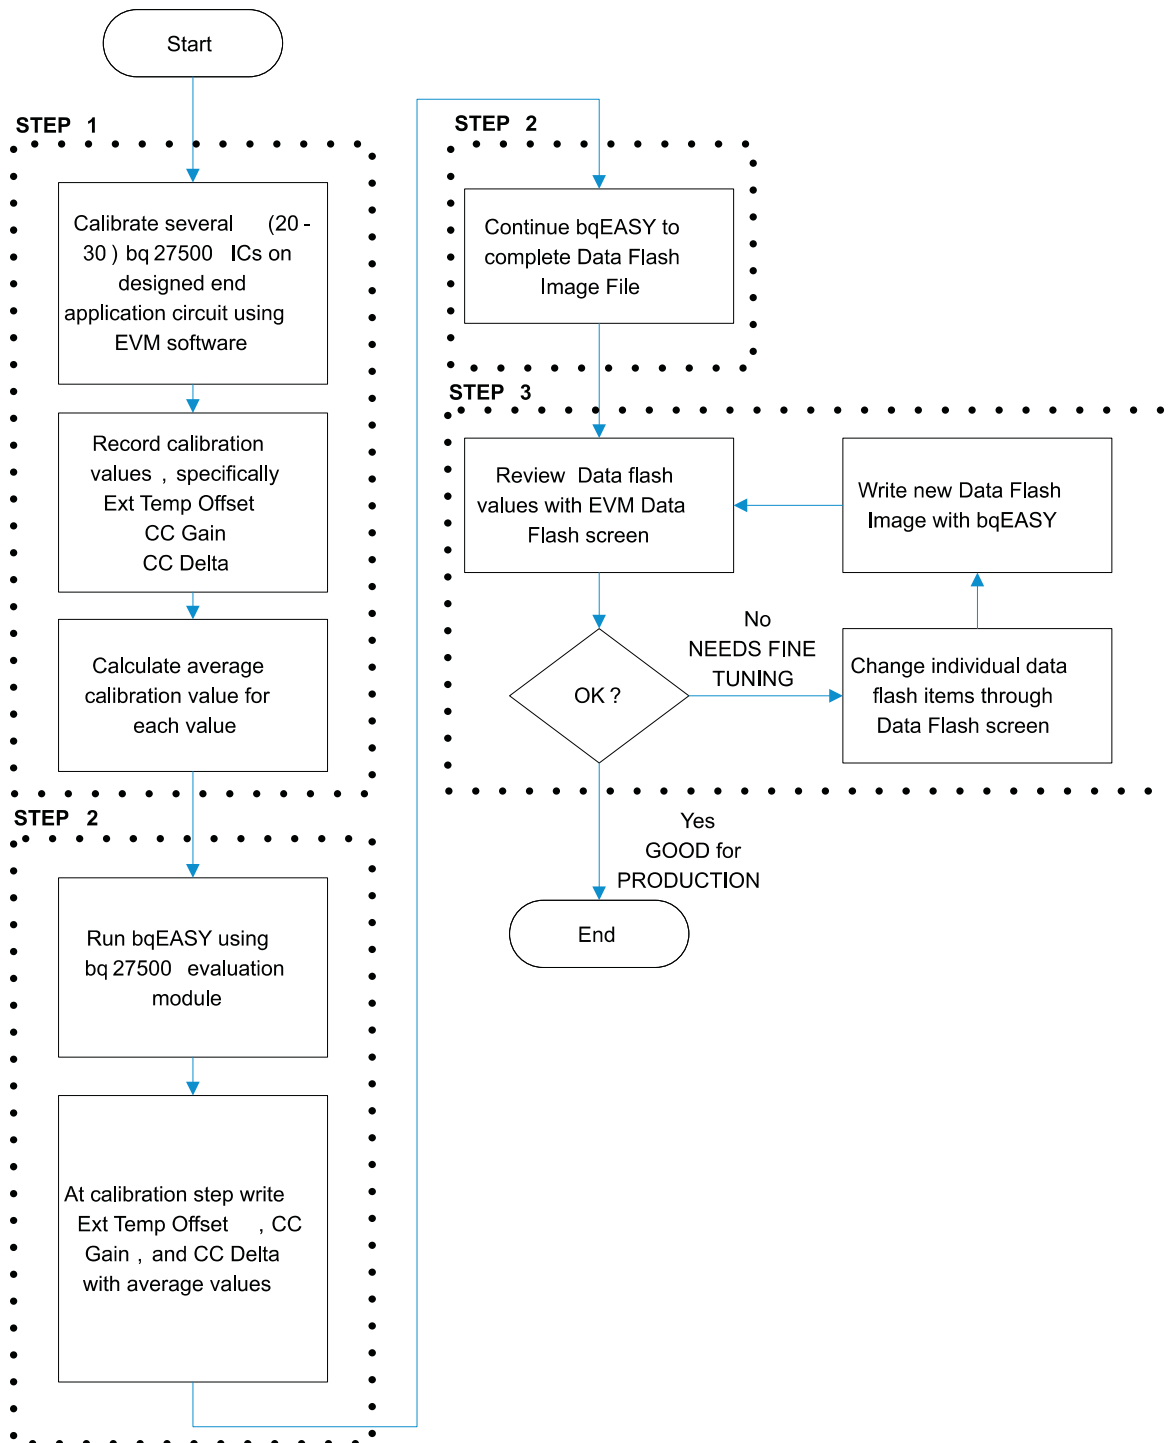

**Figure 1. DFI Creation Flow**

### 3 STEP 1: Characterize the Calibration Process

Devices of bq27500/1 single-cell gas gauges can be quickly and easily calibrated. With the Impedance Track™ devices, most calibration routines have been incorporated into firmware algorithms, which can be initiated with I<sup>2</sup>C commands. The hardware necessary for calibration is also simple. One current source, one voltage source, and one temperature sensor are all that is required. The stability of the sources is important, not so much the accuracy. However, accurately calibrated reference measurement equipment should be used for determining the actual arguments to the function. For periodic voltage measurement, a digital voltmeter with better than a 1-mV accuracy is required.

The recommended strategy for bq27500/1 calibration is to perform the calibration using 20 to 30 final application systems containing the bq27500/1 IC. All the calibration flash values are to be recorded and averaged among the 20 to 30 samples taken. The average values are the ones to be used when creating the DFI file needed for production. At time of calibration, access is required to the I<sup>2</sup>C pins, both ends of the sense resistor, and battery power. The calibration consists of performing coulomb counter offset, current gain, and temperature offset. The Evaluation Software (EVSU) is used to perform all calibration. By using the EVSU, it allows verification of the affected data flash values due to calibration (see Figure 2).

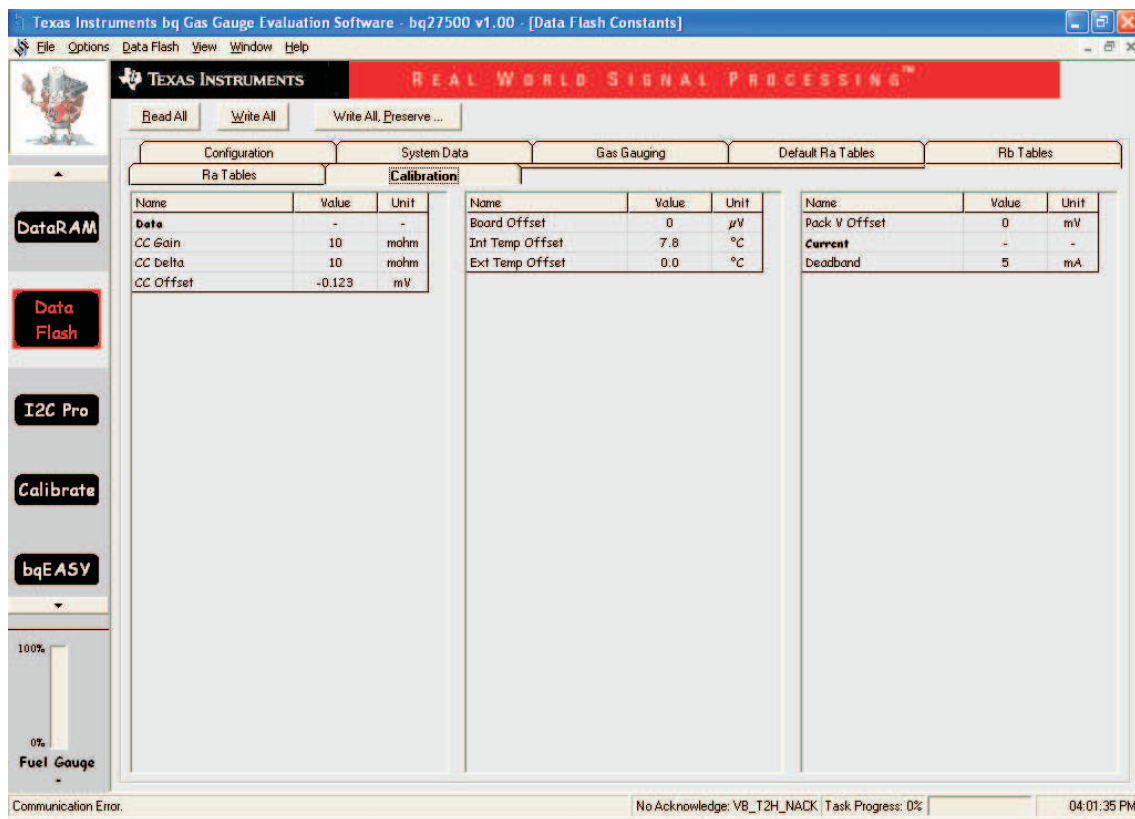


Figure 2. bq27500 EVSU Calibration Data Flash Screen


Perform the following calibration tests on each of the system samples:

**CC Offset Calibration** — Select the *CC Offset Calibration* checkbox. Then, click on the *Calibrate Part as indicated below* button (Figure 3), and wait for the EVSU to indicate that the calibration is completed. Read back the updated CC Offset data flash value by going to the Data Flash screen in EVSU and selecting the Calibration tab. Press the *Read All* button so that all the data is refreshed on the screen.

**Temperature Calibration** — Select the *Temperature Calibration* checkbox. Write the actual temperature to which the thermistor is exposed, obtained by the reference equipment measurement. Click on the *Calibrate Part as indicated below* button, and wait for the EVSU to indicate that the calibration is completed. Read back, and record the Ext Temp Offset value from the Data Flash screen.

**Pack Current Calibration** — Select the *Pack Current Calibration* checkbox; apply a current to flow through sense resistor; and write the actual current measured by meter. Click on the *Calibrate Part as indicated below* button, and wait for the EVSW to indicate that the calibration is completed. Note that a negative sign indicates current in the discharge direction. Read back, and record the updated CC Gain and CC Delta data flash values by going to Data Flash screen in EVSW and selecting the Calibration tab. Press *Read All* button so that all the data is refreshed on the screen.

The voltage and board offset calibration are not required unless there was poor layout that would add any offsets to voltage or current measurements. The EVSW does provide the means of calibrating these parameters. To perform board offset, it is expected that no loads are applied during calibration.

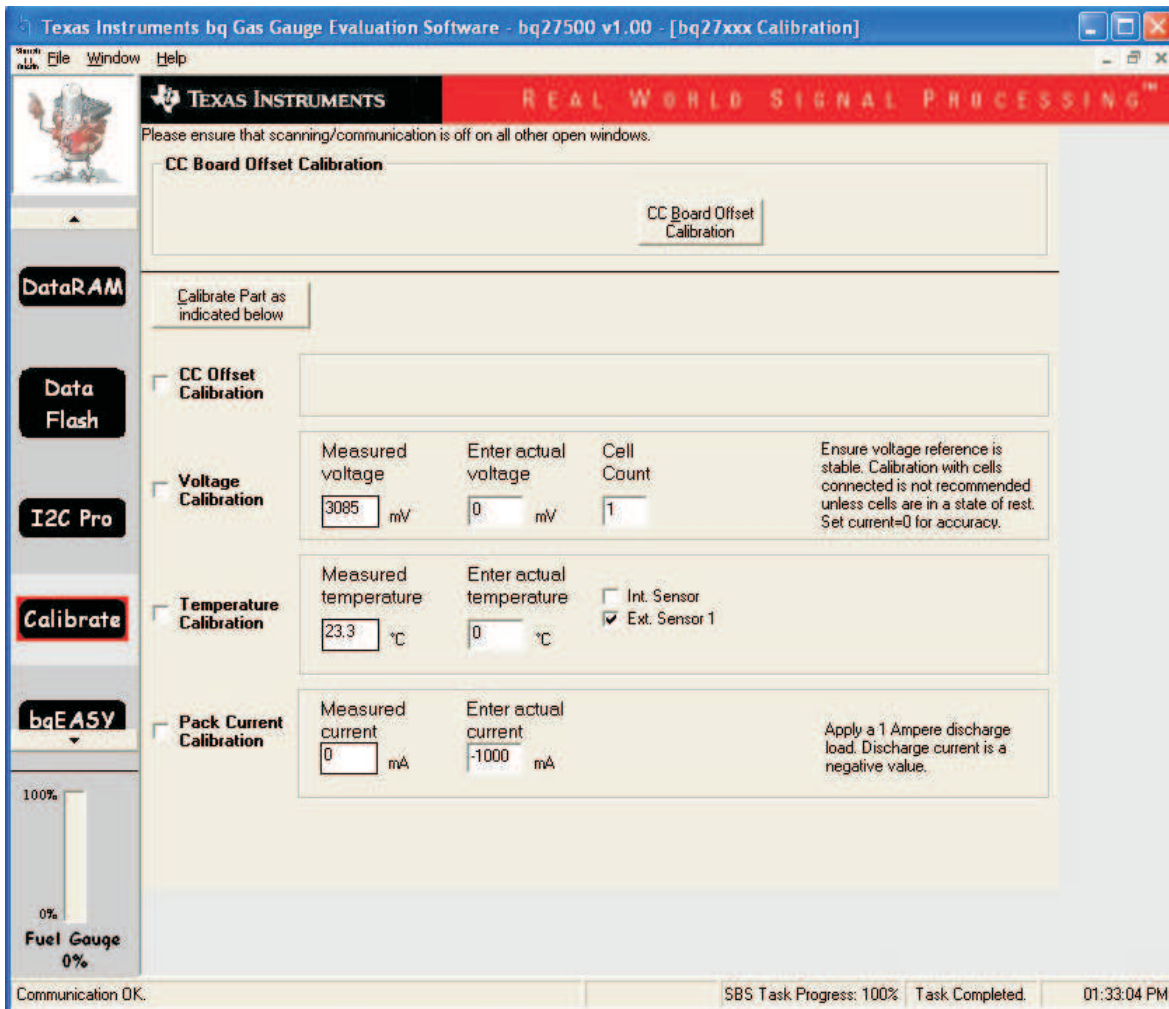

**Figure 3. bq27500 EVSW Calibration Screen**

The average Ext Temp Offset, CC Gain, and CC Delta values are entered into the DFI file in Step 2.

#### 4 STEP 2: Using bqEASY for Production Preparation

The bqEASY (see [Figure 4](#)) is a tool embedded within the EVSW that provides detailed instructions and automates processes that on completion creates the DFI that is used at production to program all bq27500/1 for a given application.

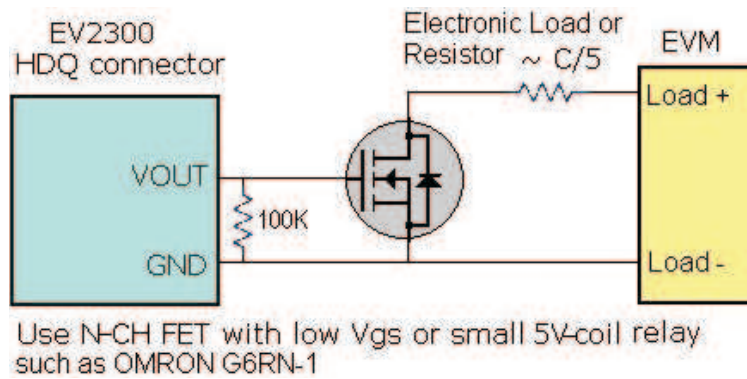


Figure 4. bqEASY

The data flash of the bq27500/1 is configured based on a questions and answers session within the Configure section of bqEASY. The questions involve topics specific to the battery pack, the charger, and the system application.

At the Calibrate session of bqEASY, it is expected that the user navigates to the Data Flash section of the EVSW and enters the average calibrations obtained from the process described in the *Characterize the Calibration Process* section of this document.

The Chemistry session in bqEASY is a valuable tool that allows the user to select the chemistry of their battery pack from a database. If the user does not know the chemistry of its battery pack, then the bqEASY gives instructions on testing the battery for determining the chemistry. The discharge during the test is automated. For automated discharge, a setup as described in Figure 5 is required. The load must be selected so that it has a C/5 rate when turned on. During automated discharge, the EV2300 board controls when to enable and disable the discharge, allowing the necessary relaxation periods for OCV measurements. Once the chemistry is determined, the data flash of bq27500/1 is updated so that it contains the proper OCV data that is characteristic of the selected chemistry. Having proper chemistry data is integral for the Impedance Track™ algorithm performing accurately.



**Figure 5. Load Connection for Automated Discharge**

The final session of the bqEASY is for running a learning cycle so that  $Q_{max}$  and the impedance tables are updated. The bqEASY provides step-by-step instructions on how to perform the learning cycle. By having learned  $Q_{max}$  and the impedance values, the DFI can be created so that when used to program bq27500 ICs in production, a learning cycle is unnecessary before a device can perform accurate battery fuel gauging as of the first cycle in the system.

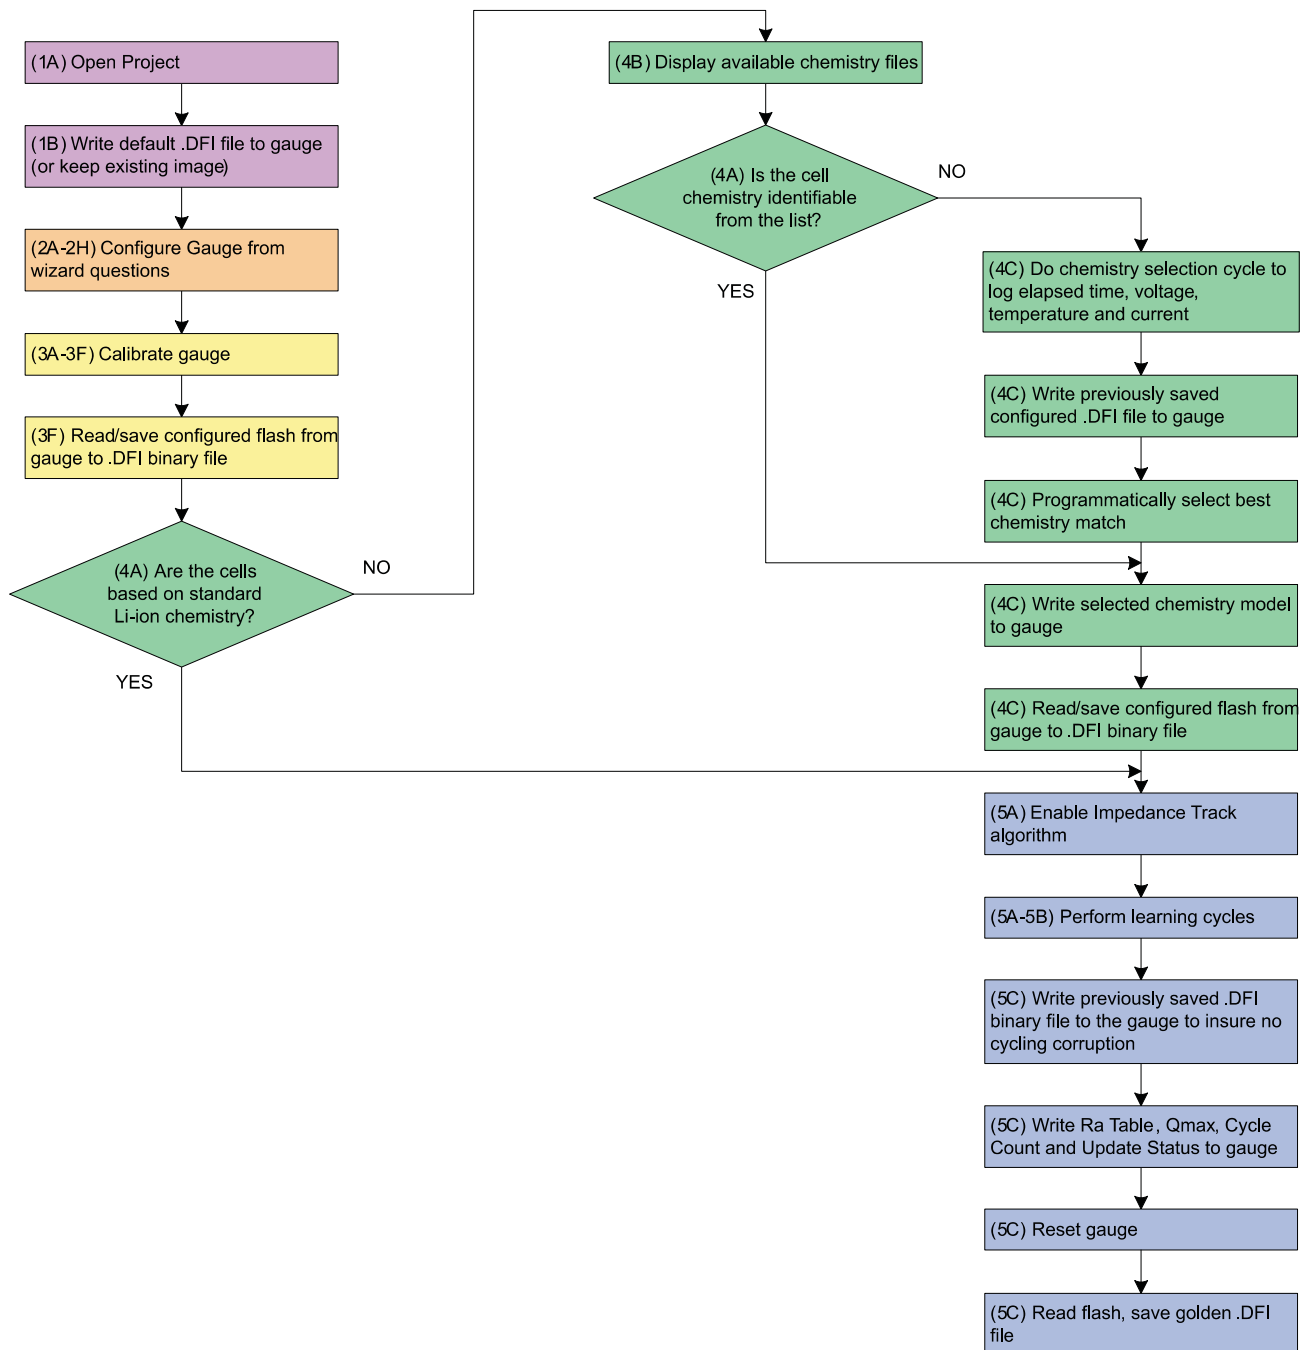


Figure 6. bqEASY Process Flowchart

## 5 STEP 3: Data Flash Review

While following the actual steps of bqEASY, the tool prompts the user to review the data flash constants for advanced configurations that might not have been addressed by bqEASY. The application report *Configuring the bq27500 Data Flash (SLUA432)* defines all the bq27500/1 data flash constants. Refer to this document when reviewing the data flash configuration against the application needs.

To modify the data flash constants, proceed to the Data Flash screen of the evaluation software and search for the desired data flash value to be modified, and change accordingly.

## 6 STEP 4: Writing the DFI at Production

System designers must ensure that there is access to the I<sup>2</sup>C lines of the bq27500 and battery power access at the time of writing the DFI in production. It is expected that the OEMs add the Write DFI step within their final complete system test that verifies the product to be functional for release to market. The flowchart in Figure 8 shows the steps that must be followed to write the DFI created with bqEASY. System test developers can use the flowchart to call I<sup>2</sup>C commands with their test setup and program all the flash of the bq27500 embedded in the application system.

The last step of the bq27500 configuration at production is to give the RESET (0x0041), IT ENABLE (0x0021), and SEALED (0x0020) commands. These commands are given by writing the corresponding two-byte data value into the CONTROL register (command 0x00/0x01) using I<sup>2</sup>C.

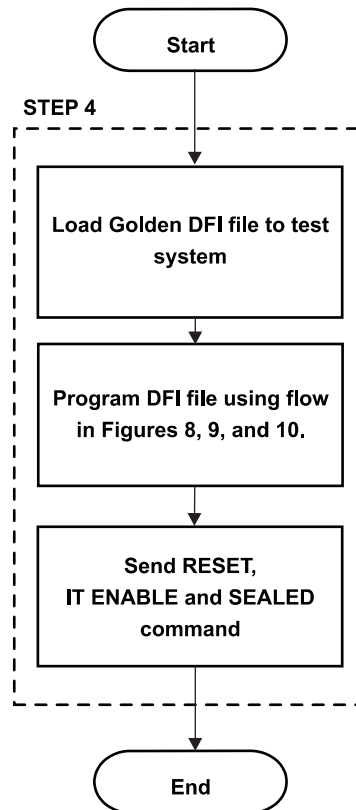


Figure 7. bq2750x Production Flow



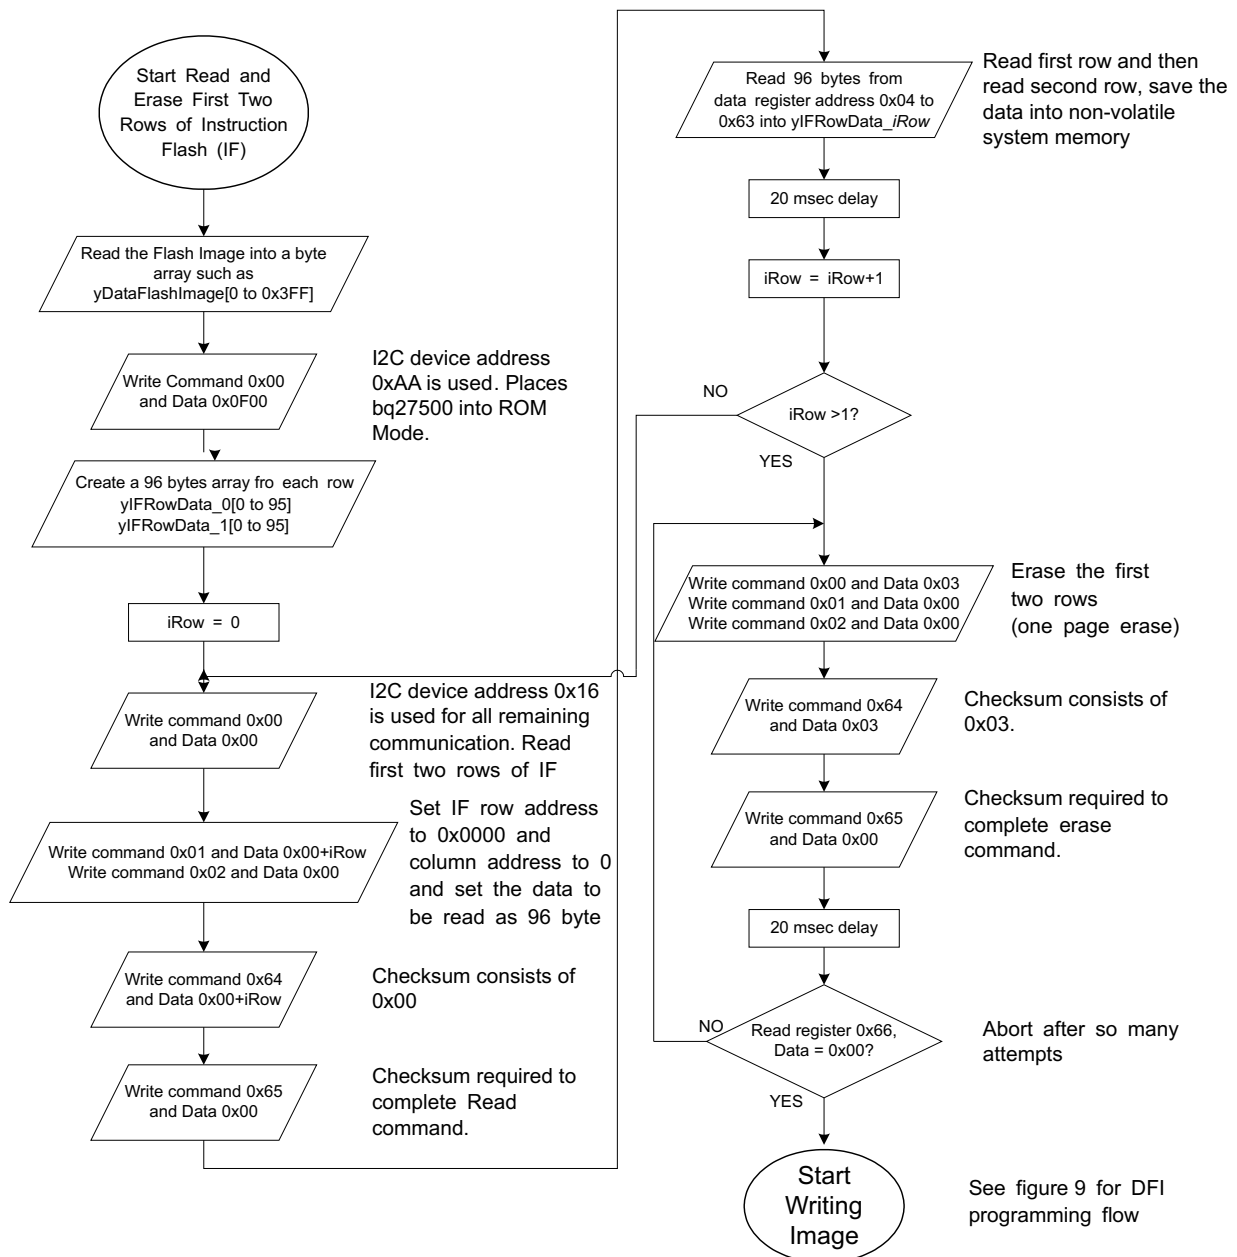


Figure 8. Instruction Flash First Two Row Record and Erase Flow

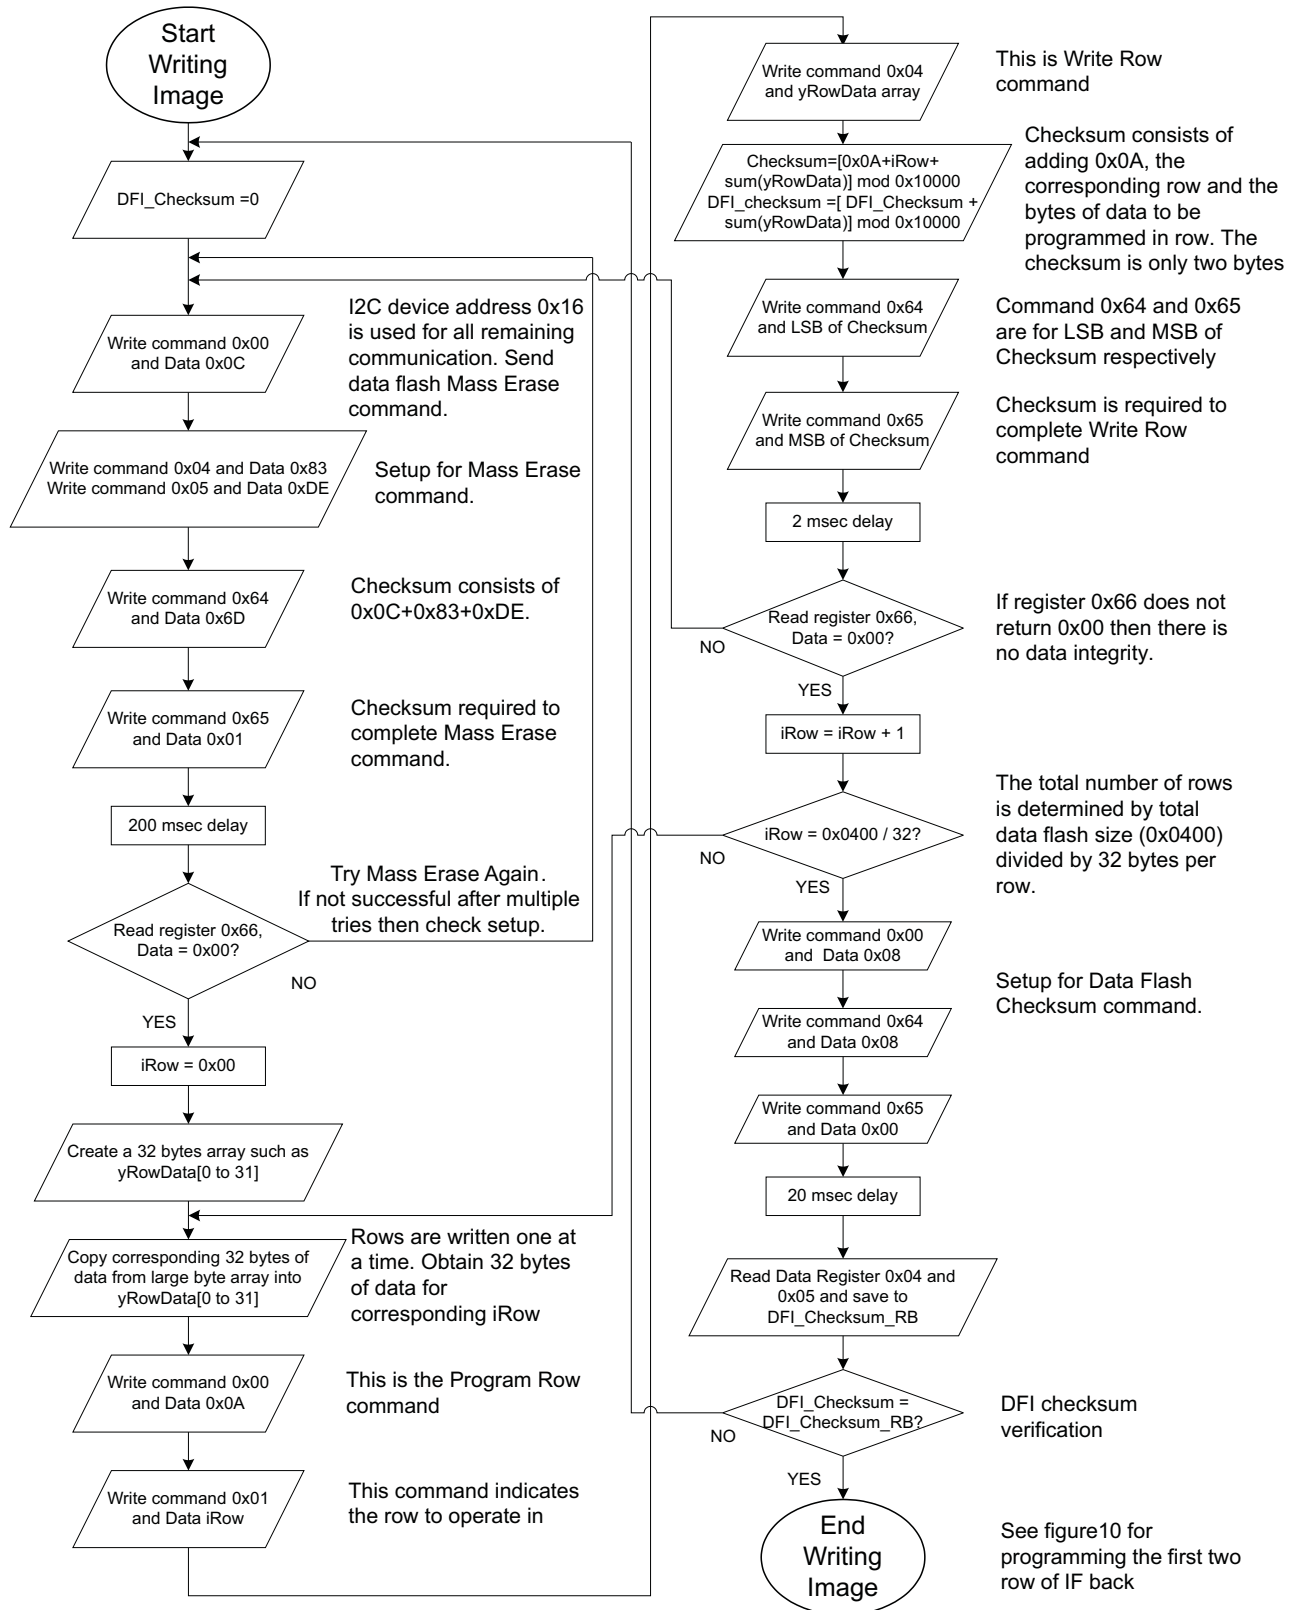


Figure 9. DFI Write Flow

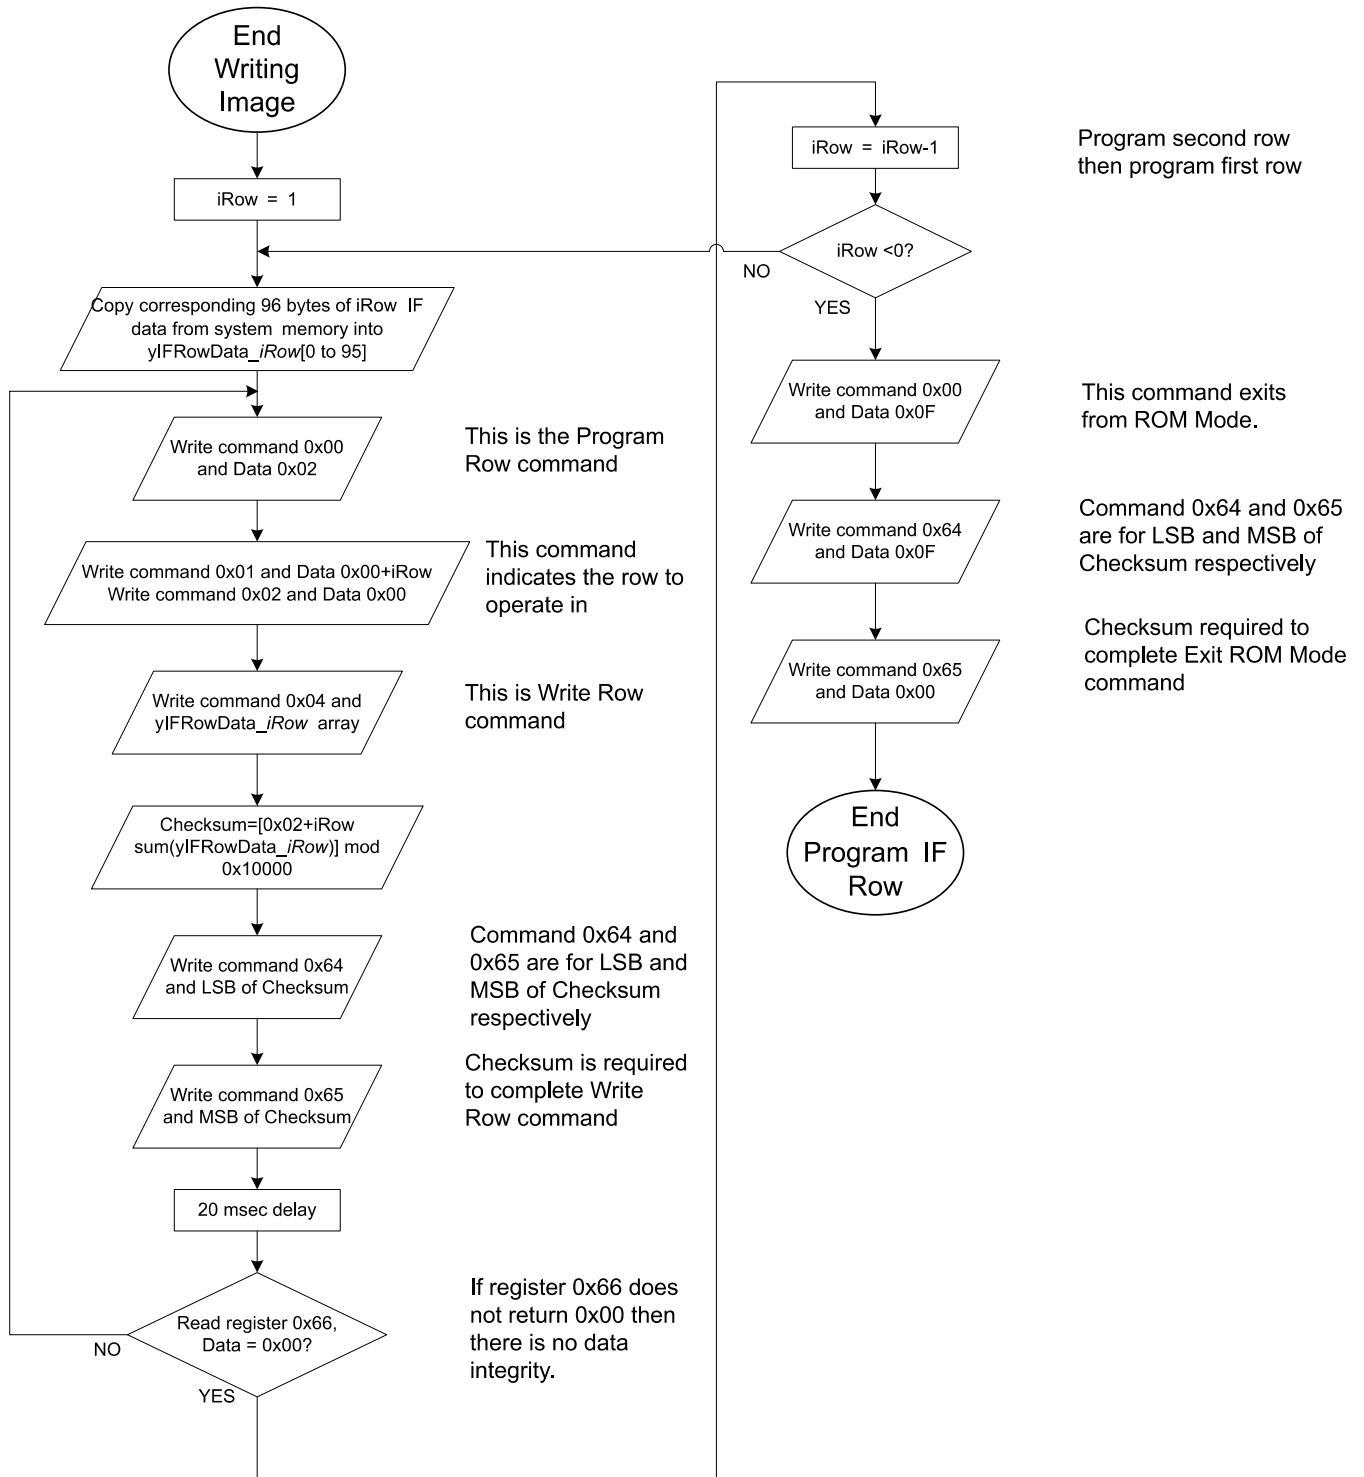


Figure 10. Instruction Flash First Two Row Reprogram Flow

---

## Revision History

Changes from D Revision (June 2010) to E Revision	Page
• Changed device series in title from "bq2750x" to "bq275xx" .....	1
• Changed <a href="#">Figure 8</a> flowchart .....	9
• Changed <a href="#">Figure 9</a> flowchart image, and corrected typo errors (Revision D – June 2010). .....	10

---

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated