

PCA9557 具有复位和配置寄存器的远程 8 位 I²C 和 SMBus 低功耗 I/O 扩展器

1 特性

- 低待机功耗，最大值为 1 μ A
- I²C 至并行端口扩展器
- 工作电源电压范围为 2.3V 至 5.5V
- 可耐受 5V 电压的 I/O 端口
- 400kHz 快速 I²C 总线
- 三个硬件地址引脚允许在 I²C/SMBus 上使用多达八个器件
- 适用于 PCA9556 的低电压、高性能迁移路径
- 输入和输出配置寄存器
- 极性反转寄存器
- 低电平有效复位输入
- 内部上电复位
- P0 上的高阻抗抗漏
- 加电时所有通道均被配置为输入
- 加电时无干扰
- SCL 或 SDA 输入端上有噪声滤波器
- 具有最大高电流驱动能力的锁存输出，适用于直接驱动 LED
- 闩锁性能超过 100mA，符合 JESD 78 II 类规范的要求
- ESD 保护性能超过 JESD 22 规范要求
 - 2000V 人体放电模型 (A114-A)
 - 200V 机器模型 (A115-A)
 - 1000V 充电器件模型 (C101)

2 应用

- 电信方舱：滤波器单元
- 服务器
- 路由器（电信交换设备）
- [个人计算机](#)
- [个人电子产品](#)
- [工业自动化](#)
- 采用 GPIO 限制的产品

3 说明

这款面向两线制双向总线 (I²C) 的 8 位 I/O 扩展器设计为在 2.3V 至 5.5V V_{CC} 下运行。该器件通过 I²C 接口 [串行时钟 (SCL) 和串行数据 (SDA)] 为大多数微控制器系列产品提供通用远程 I/O 扩展。

PCA9557 包含一个 8 位配置（输入或输出可选）、输入端口、输出端口和极性反转（高电平有效）寄存器。在加电时，I/O 被配置为输入。但是，系统控制器可以通过写入 I/O 配置位将 I/O 启用为输入或输出。针对每次输入或输出的数据保存在相应的输入或输出寄存器中。输入端口寄存器的极性可借助极性反转寄存器进行转换。所有寄存器都可通过系统控制器读取。

该器件的输出（已锁存）具有高电流驱动能力，用于直接驱动 LED。该器件具有低功耗。

发生超时或其他不当操作时，系统控制器可通过将低电平有效复位 ($\overline{\text{RESET}}$) 输入置为低电平来复位 PCA9557。上电复位将寄存器置于其缺省状态并对 I²C/SMBus 状态机进行初始化。将 $\overline{\text{RESET}}$ 置为有效也可实现复位和初始化，并且无需将部件断电。


三个硬件引脚 (A0、A1 和 A2) 用于编程和改变固定的 I²C 地址，并允许多达 8 个器件共享同一个 I²C 总线或 SMBus。

封装信息

| 器件型号 | 封装 ⁽¹⁾ | 封装尺寸 ⁽²⁾ |
|---------|-------------------|---------------------|
| PCA9557 | D (SOIC, 16) | 9.9mm × 6mm |
| | DB (SSOP, 16) | 6.2mm × 7.8mm |
| | DGV (TVSOP, 16) | 3.6mm × 6.4mm |
| | PW (TSSOP, 16) | 5mm × 6.4mm |
| | RGY (VQFN, 16) | 4mm × 3.5mm |
| | RGV (VQFN, 16) | 4mm × 4mm |

(1) 有关更多信息，请参阅节 11。

(2) 封装尺寸（长 × 宽）为标称值，并包括引脚（如适用）。

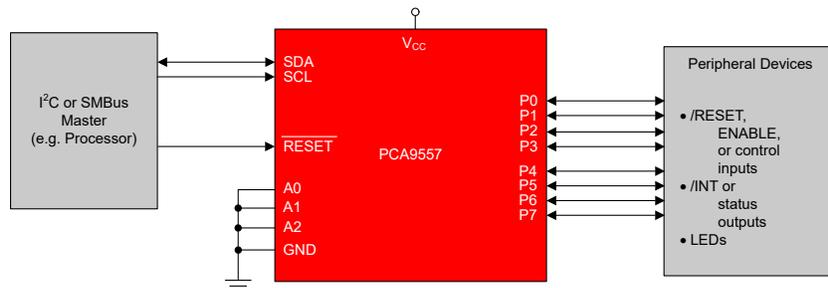

逻辑图



Table of Contents

| | | | |
|---|-----------|--|-----------|
| 1 特性 | 1 | 7.2 Feature Description..... | 16 |
| 2 应用 | 1 | 7.3 Programming..... | 17 |
| 3 说明 | 1 | 7.4 Register Maps..... | 18 |
| 4 Pin Configuration and Functions | 3 | 8 Application and Implementation | 23 |
| 5 Specifications | 5 | 8.1 Application Information..... | 23 |
| 5.1 Absolute Maximum Ratings..... | 5 | 8.2 Typical Application..... | 23 |
| 5.2 ESD Ratings..... | 5 | 8.3 Power Supply Recommendations..... | 24 |
| 5.3 Recommended Operating Conditions..... | 5 | 9 Device and Documentation Support | 25 |
| 5.4 Thermal Information..... | 6 | 9.1 Documentation Support..... | 25 |
| 5.5 Electrical Characteristics..... | 6 | 9.2 Receiving Notification of Documentation Updates.... | 25 |
| 5.6 I ² C Interface Timing Requirements..... | 7 | 9.3 支持资源..... | 25 |
| 5.7 Reset Timing Requirements..... | 8 | 9.4 Trademarks..... | 25 |
| 5.8 Switching Characteristics..... | 8 | 9.5 静电放电警告..... | 25 |
| 5.9 Typical Characteristics..... | 9 | 9.6 术语表..... | 25 |
| 6 Parameter Measurement Information | 11 | 10 Revision History | 25 |
| 7 Detailed Description | 14 | 11 Mechanical, Packaging, and Orderable Information | 26 |
| 7.1 Functional Block Diagram..... | 14 | | |

4 Pin Configuration and Functions

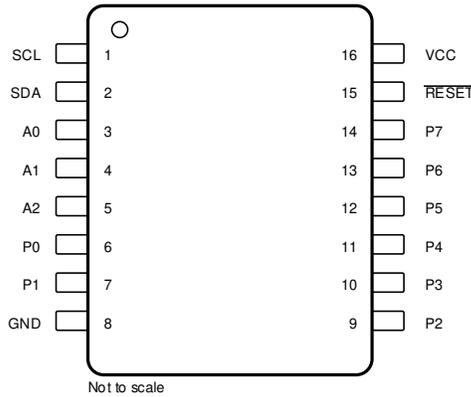


图 4-1. D, DB, DGV, PW Package, 16-Pin SOIC, SSOP, TVSOP, or TSSOP (Top View)

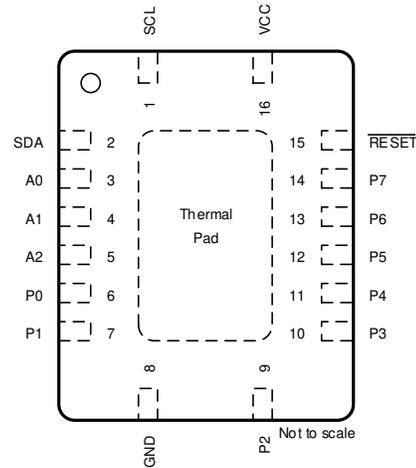


图 4-2. RGY or RGV Package, 16-Pin VQFN or VQFN (Top View)

表 4-1. Pin Functions

| PIN | | TYPE ⁽¹⁾ | DESCRIPTION |
|----------|-----|---------------------|---|
| NAME | NO. | | |
| SCL | 1 | I | Serial clock bus. Connect to V_{CC} through a pullup resistor. |
| SDA | 2 | I/O | Serial data bus. Connect to V_{CC} through a pullup resistor. |
| A0 | 3 | I | Address input. Connect directly to V_{CC} or ground. |
| A1 | 4 | I | Address input. Connect directly to V_{CC} or ground. |
| A2 | 5 | I | Address input. Connect directly to V_{CC} or ground. |
| P0 | 6 | I/O | P-port input/output. High impedance open-drain design structure. Connect to V_{CC} through a pullup resistor. |
| P1 | 7 | I/O | P-port input/output. Push-pull design structure |
| GND | 8 | G | Ground |
| P2 | 9 | I/O | P-port input/output. Push-pull design structure |
| P3 | 10 | I/O | P-port input/output. Push-pull design structure |
| P4 | 11 | I/O | P-port input/output. Push-pull design structure |
| P5 | 12 | I/O | P-port input/output. Push-pull design structure |
| P6 | 13 | I/O | P-port input/output. Push-pull design structure |
| P7 | 14 | I/O | P-port input/output. Push-pull design structure |
| RESET | 15 | I | Active-low reset input. Connect to V_{CC} through a pullup resistor if no active connection is used. |
| V_{CC} | 16 | P | Supply voltage |

(1) I = input, O = output, P = power, G = Ground

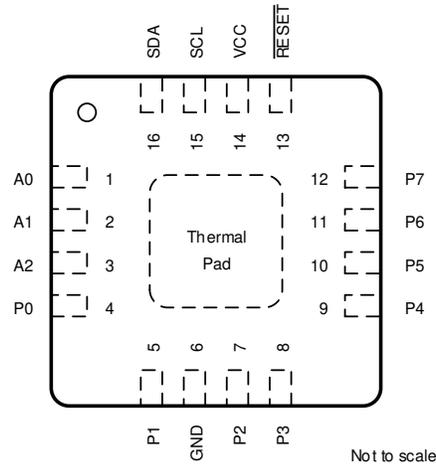


图 4-3. RGV Package, 16-Pin QFN (Top View)

表 4-2. Pin Functions, RGV

| PIN | | TYPE ⁽¹⁾ | DESCRIPTION |
|----------|-----|---------------------|---|
| NAME | NO. | | |
| A0 | 1 | I | Address input. Connect directly to V_{CC} or ground. |
| A1 | 2 | I | Address input. Connect directly to V_{CC} or ground. |
| A2 | 3 | I | Address input. Connect directly to V_{CC} or ground. |
| P0 | 4 | I/O | P-port input/output. High impedance open-drain design structure. Connect to V_{CC} through a pullup resistor. |
| P1 | 5 | I/O | P-port input/output. Push-pull design structure |
| GND | 6 | G | Ground |
| P2 | 7 | I/O | P-port input/output. Push-pull design structure |
| P3 | 8 | I/O | P-port input/output. Push-pull design structure |
| P4 | 9 | I/O | P-port input/output. Push-pull design structure |
| P5 | 10 | I/O | P-port input/output. Push-pull design structure |
| P6 | 11 | I/O | P-port input/output. Push-pull design structure |
| P7 | 12 | I/O | P-port input/output. Push-pull design structure |
| RESET | 13 | I | Active-low reset input. Connect to V_{CC} through a pullup resistor if no active connection is used. |
| V_{CC} | 14 | P | Supply voltage |
| SCL | 15 | I | Serial clock bus. Connect to V_{CC} through a pullup resistor. |
| SDA | 16 | I/O | Serial data bus. Connect to V_{CC} through a pullup resistor. |

(1) I = input, O = output, P = power, G = Ground

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) see ⁽¹⁾

| | | MIN | MAX | UNIT |
|------------------|--|--|-------|------|
| V _{CC} | Supply voltage | - 0.5 | 6 | V |
| V _I | Input voltage ⁽²⁾ | - 0.5 | 6 | V |
| V _O | Output voltage ⁽²⁾ | - 0.5 | 6 | V |
| I _{IK} | Input clamp current | V _I < 0 | - 20 | mA |
| I _{OK} | Output clamp current | V _O < 0 | - 20 | mA |
| I _{IOK} | Input/output clamp current | V _O < 0 or V _O > V _{CC} | - 20 | μA |
| I _{OL} | Continuous output low current | V _O = 0 to V _{CC} | 50 | mA |
| I _{OH} | Continuous output high current | V _O = 0 to V _{CC} | - 50 | mA |
| I _{CC} | Continuous current through GND | | - 250 | mA |
| | Continuous current through V _{CC} | | 160 | |
| T _{stg} | Storage temperature | - 65 | 150 | °C |

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommend Operating Conditions*. If briefly operating outside the *Recommend Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

5.2 ESD Ratings

| | | | VALUE | UNIT |
|--------------------|-------------------------|--|-------|------|
| V _(ESD) | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | ±2000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | ±1000 | |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

| | | MIN | MAX | UNIT |
|-----------------|--------------------------------|---|-----------------------|-----------------------|
| V _{CC} | Supply voltage | 2.3 | 5.5 | V |
| V _{IH} | High-level input voltage | SCL, SDA | 0.7 × V _{CC} | 5.5 |
| | | A2 - A0, P7 - P0, $\overline{\text{RESET}}$ | 2.2 | 5.5 |
| V _{IL} | Low-level input voltage | SCL, SDA | - 0.5 | 0.3 × V _{CC} |
| | | A2 - A0, P7 - P0, ($\overline{\text{RESET}}$ V _{CC} > 2.4V) | - 0.5 | 0.8 |
| | | $\overline{\text{RESET}}$ V _{CC} ≤ 2.4V | - 0.5 | 0.75 |
| I _{OH} | High-level output current | P7 - P1 | - 10 | mA |
| I _{OL} | Low-level output current | P7 - P0 | 25 | mA |
| T _A | Operating free-air temperature | - 40 | 85 | °C |

5.4 Thermal Information

over operating free-air temperature range (unless otherwise noted)

| THERMAL METRIC ⁽¹⁾ | | PCA9557 | | | | | | UNIT |
|-------------------------------|--|----------|-----------|------------|-----------|------------|------------|------|
| | | D (SSOP) | DB (SSOP) | DGV (SSOP) | PW (SSOP) | RGV (VQFN) | RGY (VQFN) | |
| | | 16 PINS | 16 PINS | 16 PINS | 16 PINS | 16 PINS | 16 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 77.2 | 82 | 120 | 98.0 | 44.5 | 47 | °C/W |
| R _{θJC(top)} | Junction-to-case (top) thermal resistance | 40.0 | | | 30.7 | 40.1 | | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | 39.2 | | | 52.7 | 20.2 | | °C/W |
| ψ _{JT} | Junction-to-top characterization parameter | 6.5 | | | 1.0 | 0.9 | | °C/W |
| ψ _{JB} | Junction-to-board characterization parameter | 38.8 | | | 52.1 | 20.2 | | °C/W |
| R _{θJC(bot)} | Junction-to-case (bottom) thermal resistance | N/A | | | N/A | 5.7 | | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

5.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | VCC | MIN | TYP ⁽¹⁾ | MAX | UNIT | |
|------------------|---|---|------------------|------|--------------------|-----|------|--|
| V _{IK} | Input diode clamp voltage | I _I = -18mA | 2.3V to 5.5V | -1.2 | | | V | |
| V _{POR} | Power-on reset voltage | V _I = V _{CC} or GND, I _O = 0 | V _{POR} | | 1.65 | 2.1 | V | |
| V _{OH} | P-port high-level output voltage ⁽³⁾ | I _{OH} = -8mA | 2.3V | | 1.8 | | V | |
| | | | 3V | | 2.6 | | | |
| | | | 4.5V | | 3 | | | |
| | | | 4.75V | | 4.1 | | | |
| | | I _{OH} = -10mA | 2.3V | | 1.5 | | | |
| | | | 3V | | 2.5 | | | |
| | | | 4.5V | | 3 | | | |
| | | | 4.75V | | 4 | | | |
| I _{OL} | SDA P port ⁽²⁾ | V _{OL} = 0.4V | 2.3V to 5.5V | | 3 | | mA | |
| | | V _{OL} = 0.5V | | | 8 | 20 | | |
| | | V _{OL} = 0.55V | 2.3V to 5.5V | | 8 | 20 | | |
| | | V _{OL} = 0.7V | | | 10 | 24 | | |
| I _{OH} | P port, except for P0 ⁽²⁾ P0 ⁽²⁾ | V _{OH} = 2.3V | 2.3V to 5.5V | | -4 | | mA | |
| | | V _{OH} = 4.6V | 4.6V to 5.5V | | | 1 | | |
| | | V _{OH} = 3.3V | 3.3V to 5.5V | | | 1 | | |
| I _I | SCL, SDA | V _I = V _{CC} or GND | 2.3V to 5.5V | | | ±1 | μA | |
| | A2 - A0, RESET | | | | | ±1 | | |
| I _{IH} | P port | V _I = V _{CC} | 2.3V to 5.5V | | | 1 | μA | |
| I _{IL} | P port | V _I = GND | 2.3V to 5.5V | | | 1 | μA | |
| I _{CC} | Operating mode | V _I = V _{CC} or GND, I _O = 0, I/O = inputs, f _{SCL} = 400 kHz | 5.5V | | 19 | 25 | μA | |
| | | | 3.6V | | 12 | 22 | | |
| | | | 2.7V | | 8 | 20 | | |
| | | | 5.5V | | 1.5 | 5 | | |
| | | | 3.6V | | 1 | 4 | | |
| | | | 2.7V | | 0.6 | 3 | | |
| | Standby mode | V _I = V _{CC} or GND, I _O = 0, I/O = inputs, f _{SCL} = 0 kHz | 5.5V | | 0.25 | 1 | | |
| | | | 3.6V | | 0.25 | 0.9 | | |
| | | | 2.7V | | 0.2 | 0.8 | | |

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | VCC | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-----------------|------------------------------------|--|---------------|-----|--------------------|-----|------|
| ΔI_{CC} | Additional current in standby mode | One input at $V_{CC} - 0.6$ V, Other inputs at V_{CC} or GND | 2.3V to 5.5V | | | 0.2 | mA |
| | | Every LED I/O at $V_I = 4.3$ V, $f_{SCL} = 0$ kHz | 5.5V | | | 0.4 | |
| C_I | SCL | $V_I = V_{CC}$ or GND | 2.3V to 5.5 V | | 4 | 6 | pF |
| C_{io} | SDA | $V_{IO} = V_{CC}$ or GND | 2.3V to 5.5V | | 5.5 | 8 | pF |
| | P port | | | | 7.5 | 9.5 | |

- (1) All typical values are at nominal supply voltage (2.5, 3.3, or 5V V_{CC}) and $T_A = 25^\circ\text{C}$.
- (2) Each I/O must be externally limited to a maximum of 25mA, and the P port (P7 - P0) must be limited to a maximum current of 200mA.
- (3) The total current sourced by all I/Os must be limited to 85mA per bit.

5.6 I²C Interface Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 6-1](#))

| | | MIN | MAX | UNIT |
|----------------------|--|------------------------------|------|---------------|
| STANDARD MODE | | | | |
| f_{scl} | I ² C clock frequency | 100 | | kHz |
| t_{sch} | I ² C clock high time | 4 | | μs |
| t_{scl} | I ² C clock low time | 4.7 | | μs |
| t_{sp} | I ² C spike time | 50 | | ns |
| t_{sds} | I ² C serial data setup time | 250 | | ns |
| t_{sdh} | I ² C serial data hold time | | 0 | ns |
| t_{icr} | I ² C input rise time | | 1000 | ns |
| t_{icf} | I ² C input fall time | | 300 | ns |
| t_{ocf} | I ² C output fall time, 10-pF to 400-pF bus | | 300 | ns |
| t_{buf} | I ² C bus free time between stop and start | | 4.7 | μs |
| t_{sts} | I ² C start or repeated start condition setup time | | 4.7 | μs |
| t_{sth} | I ² C start or repeated start condition hold time | | 4 | μs |
| t_{sps} | I ² C stop condition setup time | | 4 | μs |
| $t_{vd(data)}$ | Valid data time, SCL low to SDA output valid | 1 | | μs |
| $t_{vd(ack)}$ | Valid data time of ACK condition, ACK signal from SCL low to SDA (out) low | | 1 | μs |
| C_b | I ² C bus capacitive load | | 400 | pF |
| FAST MODE | | | | |
| f_{scl} | I ² C clock frequency | 400 | | kHz |
| t_{sch} | I ² C clock high time | 0.6 | | μs |
| t_{scl} | I ² C clock low time | 1.3 | | μs |
| t_{sp} | I ² C spike time | 50 | | ns |
| t_{sds} | I ² C serial data setup time | 100 | | ns |
| t_{sdh} | I ² C serial data hold time | | 0 | ns |
| t_{icr} | I ² C input rise time | $20 + 0.1C_b$ ⁽¹⁾ | 300 | ns |
| t_{icf} | I ² C input fall time | $20 + 0.1C_b$ ⁽¹⁾ | 300 | ns |
| t_{ocf} | I ² C output fall time, 10-pF to 400-pF bus | $20 + 0.1C_b$ ⁽¹⁾ | 300 | ns |
| t_{buf} | I ² C bus free time between Stop and Start | | 1.3 | μs |
| t_{sts} | I ² C start or repeated start condition setup time | | 0.6 | μs |
| t_{sth} | I ² C start or repeated start condition hold time | | 0.6 | μs |
| t_{sps} | I ² C stop condition setup time | | 0.6 | μs |
| $t_{vd(data)}$ | Valid data time, SCL low to SDA output valid | 0.9 | | μs |
| $t_{vd(ack)}$ | Valid data time of ACK condition, ACK signal from SCL low to SDA (out) low | | 0.9 | μs |

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 6-1](#))

| | | MIN | MAX | UNIT |
|-------|--------------------------------------|-----|-----|------|
| C_b | I ² C bus capacitive load | | 400 | pF |

(1) C_b = total capacitance of one bus line in pF

5.7 Reset Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 6-3](#))

| | | MIN | MAX | UNIT |
|------------------------------------|---|-----|-----|------|
| STANDARD MODE and FAST MODE | | | | |
| t_W | Reset pulse duration $V_{CC} \leq 2.5V^{(2)}$ | | 20 | ns |
| | Reset pulse duration $V_{CC} > 2.5V^{(2)}$ | | 16 | ns |
| t_{REC} | Reset recovery time | | 0 | ns |
| t_{RESET} | Time to reset ⁽¹⁾ | | 400 | ns |

(1) The PCA9557 requires a minimum of 400 ns to be reset

(2) A pulse duration of 16 ns minimum must be applied to RESET to return the PCA9557 to its default state.

5.8 Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see [Figure 6-1](#))

| PARAMETER | | FROM | TO | MIN | MAX | UNIT |
|------------------------------------|-----------------------|--------|---------|-----|-----|------|
| STANDARD MODE and FAST MODE | | | | | | |
| t_{pv} | Output data valid | SCL | P0 | | 250 | ns |
| | | SCL | P1 - P7 | | 200 | |
| t_{ps} | Input data setup time | P port | SCL | 0 | | ns |
| t_{ph} | Input data hold time | P port | SCL | 200 | | ns |

5.9 Typical Characteristics

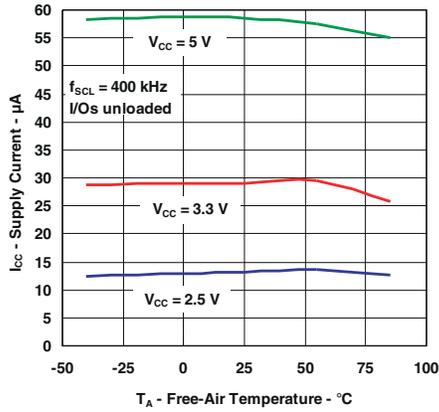


图 5-1. Supply Current vs Temperature

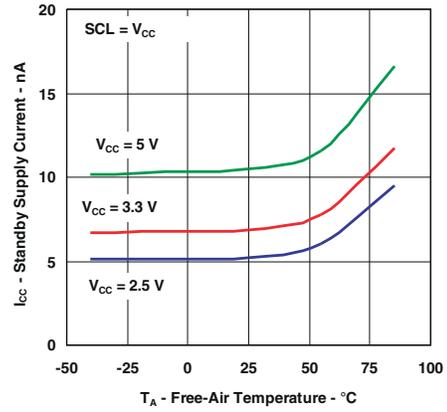


图 5-2. Standby Supply Current vs Temperature

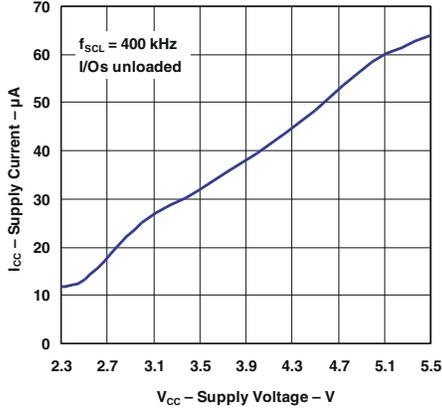


图 5-3. Supply Current vs Supply Voltage

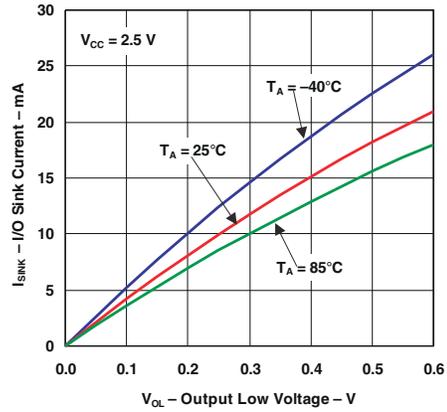


图 5-4. I/O Sink Current vs Output Low Voltage

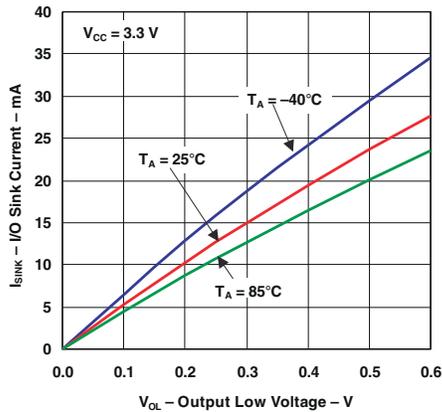


图 5-5. I/O Sink Current vs Output Low Voltage

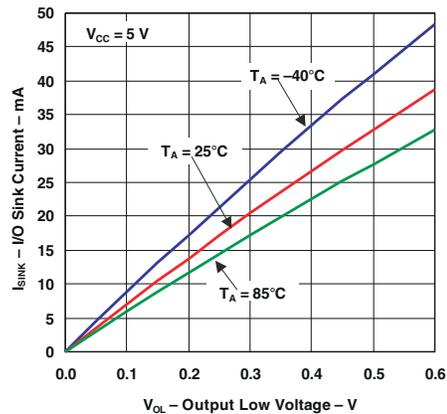


图 5-6. I/O Sink Current vs Output Low Voltage

5.9 Typical Characteristics (continued)

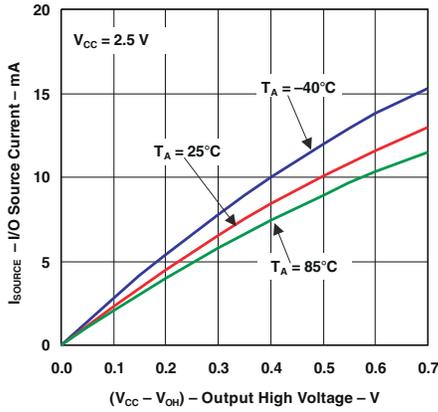


图 5-7. I/O Source Current vs Output High Voltage (P7 - P1)

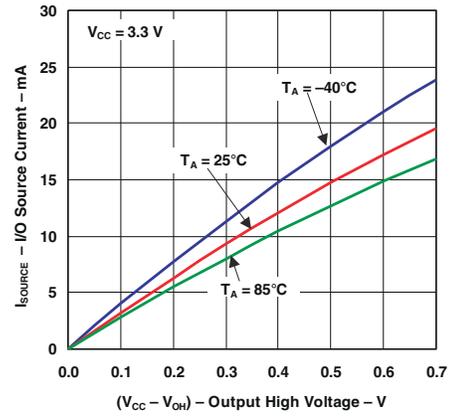


图 5-8. I/O Source Current vs Output High Voltage (P7 - P1)

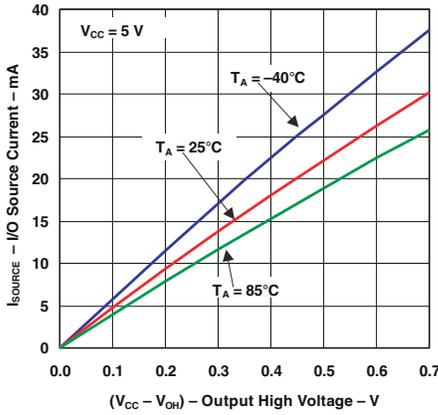


图 5-9. I/O Source Current vs Output High Voltage (P7 - P1)

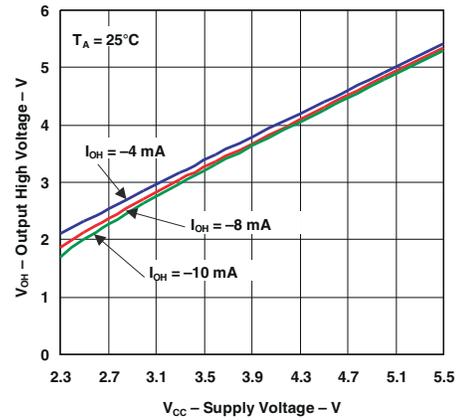


图 5-10. Output High Voltage vs Supply Voltage (P7 - P1)

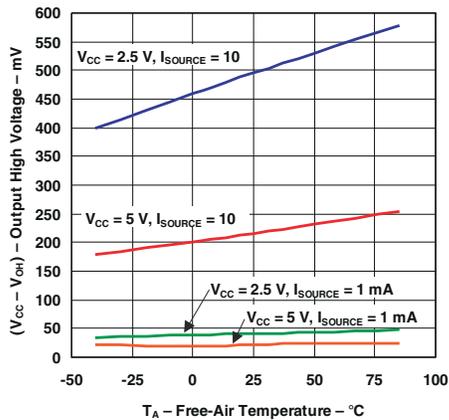


图 5-11. Output High Voltage vs Temperature (P7 - P1)




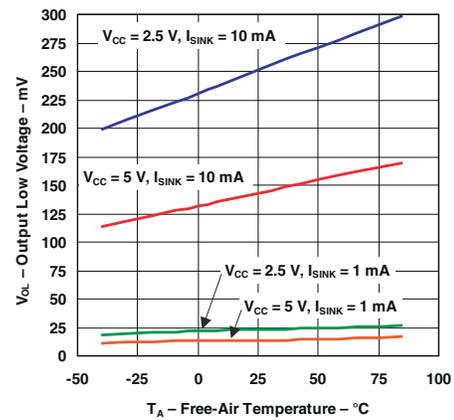


图 5-12. Output Low Voltage vs Temperature

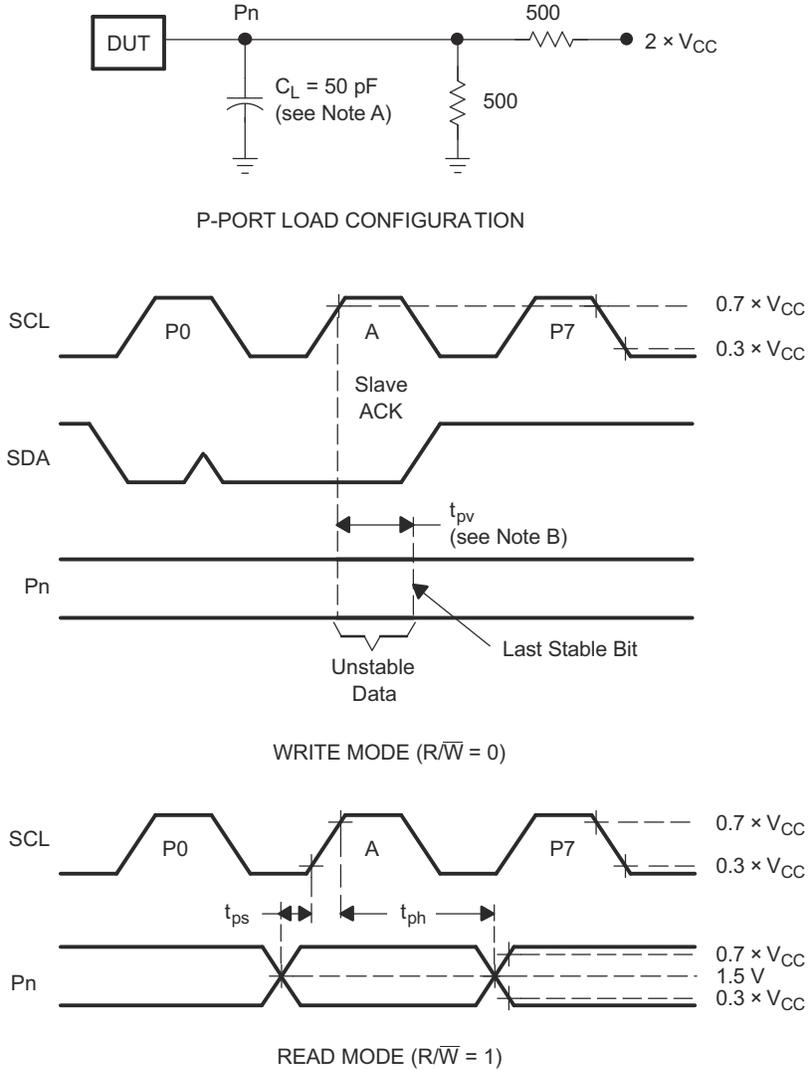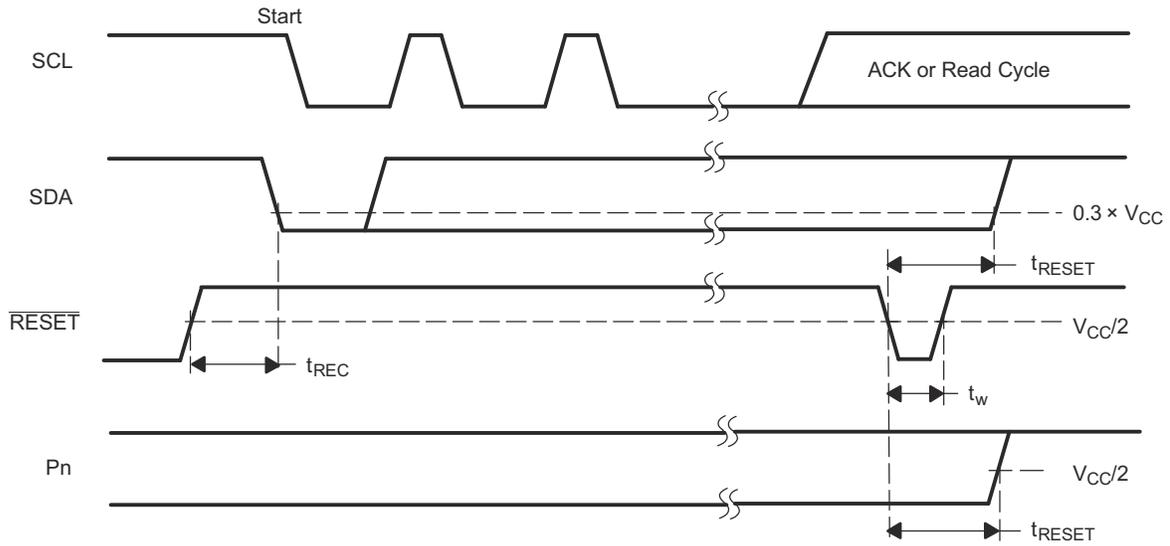

- A. C_L includes probe and jig capacitance.
- B. t_{pv} is measured from $0.7 \times V_{CC}$ on SCL to 50% I/O (P_n) output.
- C. All inputs are supplied by generators having the following characteristics: $PRR \leq 10$ MHz, $Z_O = 50 \Omega$, $t_r/t_f \leq 30$ ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

图 6-2. P-Port Load Circuit and Voltage Waveforms

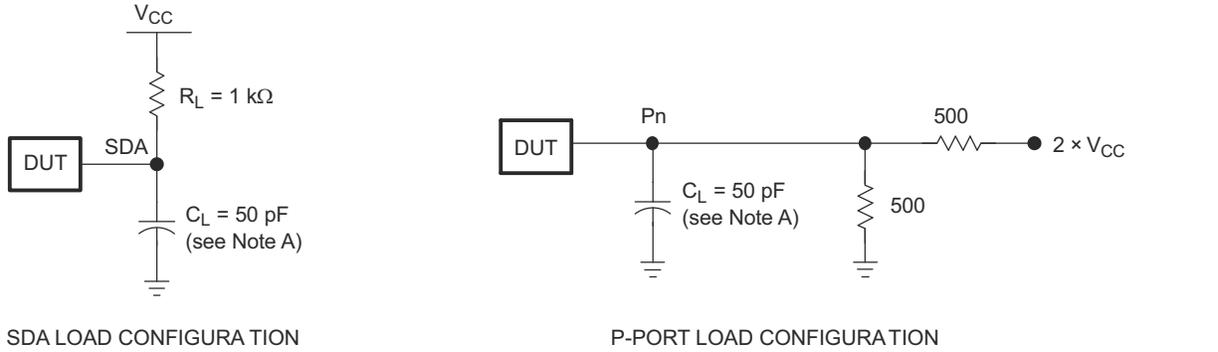


- A. C_L includes probe and jig capacitance.
- B. All inputs are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r/t_f ≤ 30 ns.
- C. I/Os are configured as inputs.
- D. All parameters and waveforms are not applicable to all devices.

图 6-3. Reset Load Circuits and Voltage Waveforms

7 Detailed Description


7.1 Functional Block Diagram

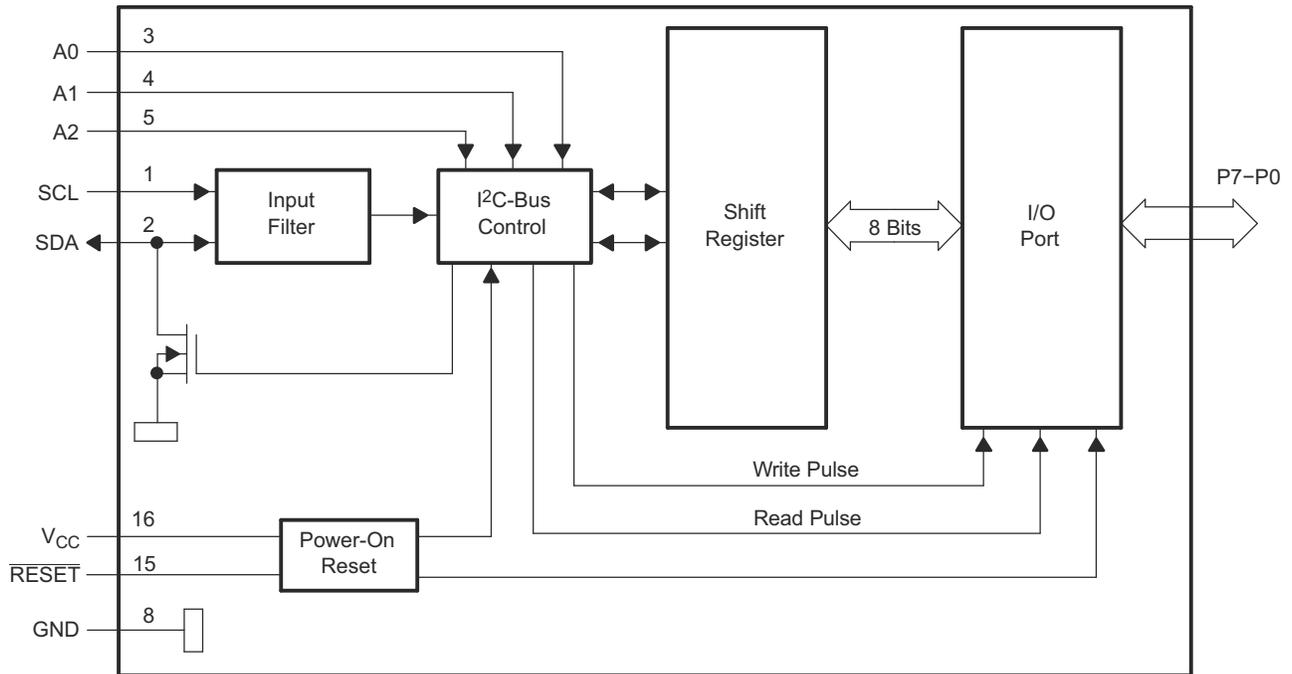

Pin numbers shown are for the D, DB, DGV, PW, and RGY packages.


All I/Os are set to inputs at reset.

图 7-1. Logic Diagram (Positive Logic)

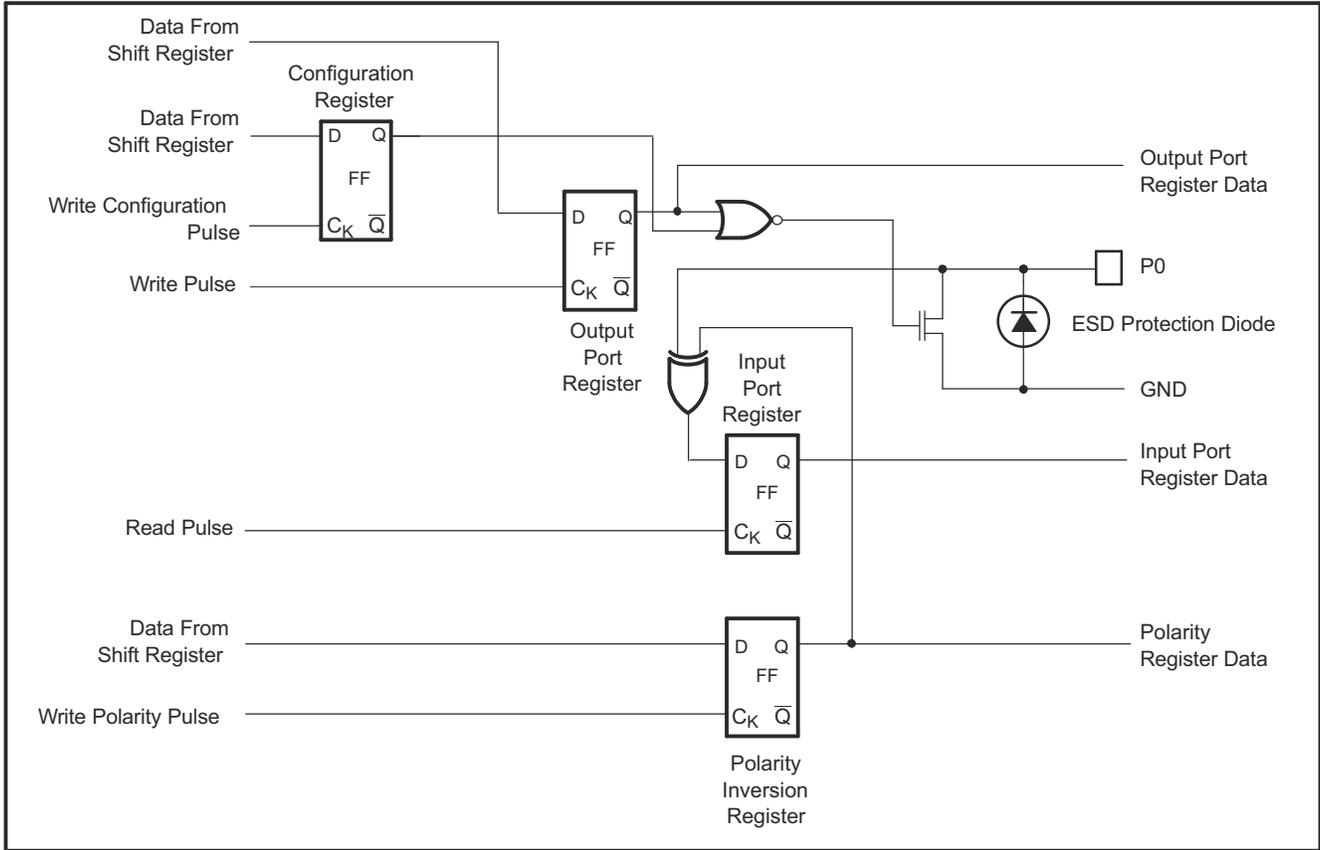

On power up or reset, all registers return to default values.

图 7-2. Simplified Schematic Diagram of P0

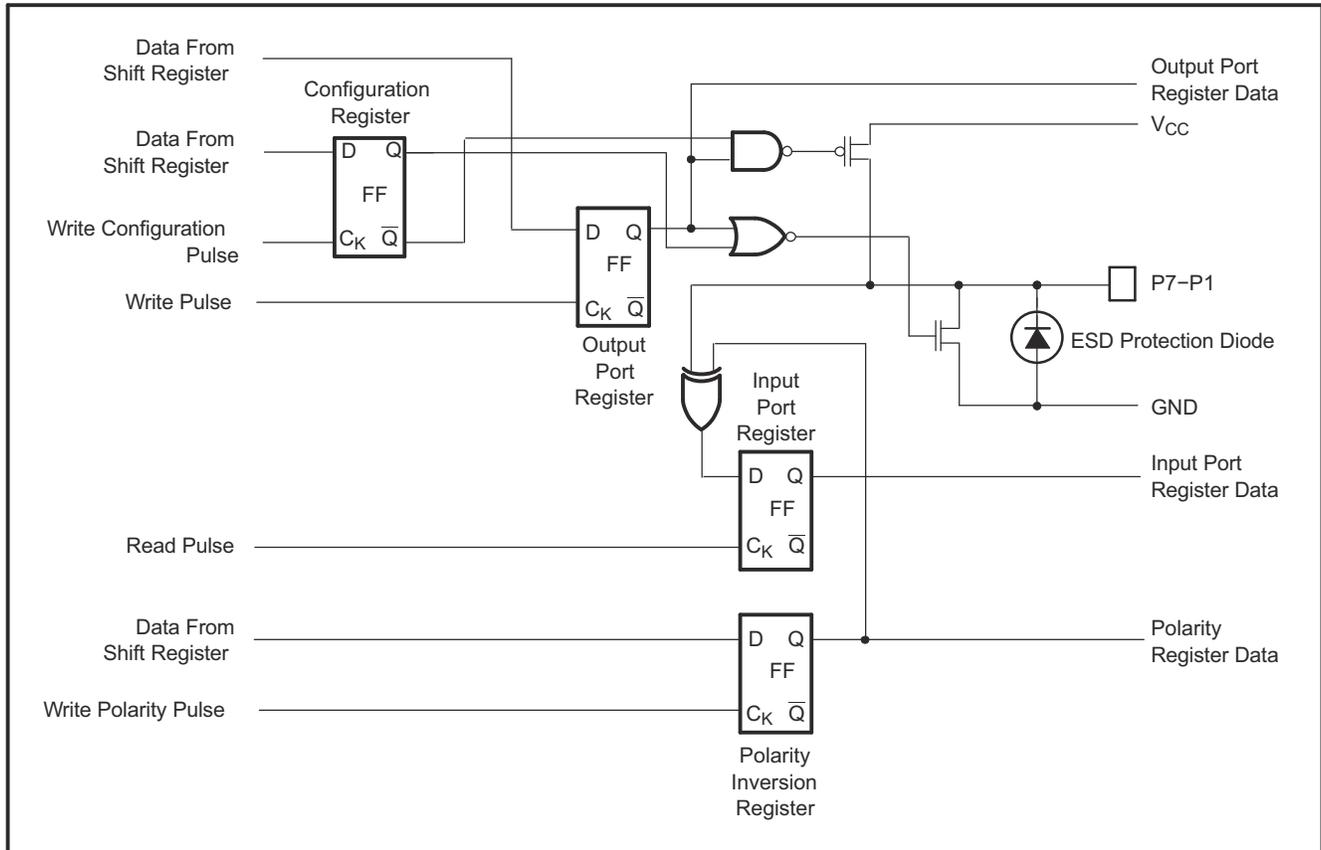

On power up or reset, all registers return to default values.

图 7-3. Simplified Schematic Diagram of P7 - P1

7.2 Feature Description

7.2.1 RESET

A reset can be accomplished by holding the $\overline{\text{RESET}}$ pin low for a minimum of t_{W} . The PCA9557 registers and I²C/SMBus state machine are held in their default states until $\overline{\text{RESET}}$ again is high. This input requires a pullup resistor to V_{CC} if no active connection is used.

7.2.1.1 RESET Errata

If $\overline{\text{RESET}}$ voltage set higher than V_{CC} , current will flow from $\overline{\text{RESET}}$ pin to V_{CC} pin.

7.2.1.1.1 System Impact

V_{CC} will be pulled above its regular voltage level.

7.2.1.1.2 System Workaround

Design such that $\overline{\text{RESET}}$ voltage is same or lower than V_{CC} .

7.2.2 Power-On Reset

When power (from 0 V) is applied to V_{CC} , an internal power-on reset holds the PCA9557 in a reset condition until V_{CC} has reached V_{POR} . At that time, the reset condition is released, and the PCA9557 registers and I²C/SMBus state machine initialize to their default states. After that, V_{CC} must be lowered to below 0.2 V and back up to the operating voltage for a power-reset cycle. The $\overline{\text{RESET}}$ input can be asserted to reset the system, while keeping the V_{CC} at its operating level.

See the [Power-On Reset Errata](#) section.

7.3 Programming

7.3.1 I²C Interface

The bidirectional I²C bus consists of the serial clock (SCL) and serial data (SDA) lines. Both lines must be connected to a positive supply through a pullup resistor when connected to the output stages of a device. Data transfer may be initiated only when the bus is not busy.

I²C communication with this device is initiated by a controller sending a start condition, a high-to-low transition on the SDA input and output while the SCL input is high (see 图 7-4). After the start condition, the device address byte is sent, most-significant bit (MSB) first, including the data direction bit (R/\bar{W}).

After receiving the valid address byte, this device responds with an acknowledge (ACK), a low on the SDA input/output during the high of the ACK-related clock pulse. The address (A2 - A0) inputs of the target device must not be changed between the start and the stop conditions.

On the I²C bus, only one data bit is transferred during each clock pulse. The data on the SDA line must remain stable during the high pulse of the clock period, as changes in the data line at this time are interpreted as control commands (start or stop) (see 图 7-5).

A stop condition, a low-to-high transition on the SDA input/output while the SCL input is high, is sent by the controller (see 图 7-4).

Any number of data bytes can be transferred from the transmitter to the receiver between the Start and the Stop conditions. Each byte of eight bits is followed by one ACK bit. The transmitter must release the SDA line before the receiver can send an ACK bit. The device that acknowledges must pull down the SDA line during the ACK clock pulse, so that the SDA line is stable low during the high pulse of the ACK-related clock period (see 图 7-6). When a target receiver is addressed, it must generate an ACK after each byte is received. Similarly, the controller must generate an ACK after each byte that it receives from the target transmitter. Setup and hold times must be met to ensure proper operation.

A controller receiver signals an end of data to the target transmitter by not generating an acknowledge (NACK) after the last byte has been clocked out of the target. This is done by the controller receiver by holding the SDA line high. In this event, the transmitter must release the data line to enable the controller to generate a stop condition.

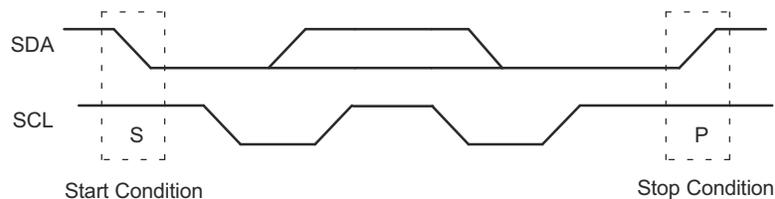


图 7-4. Definition of Start and Stop Conditions

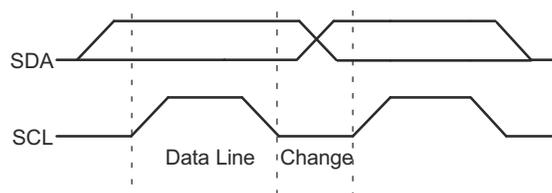


图 7-5. Bit Transfer

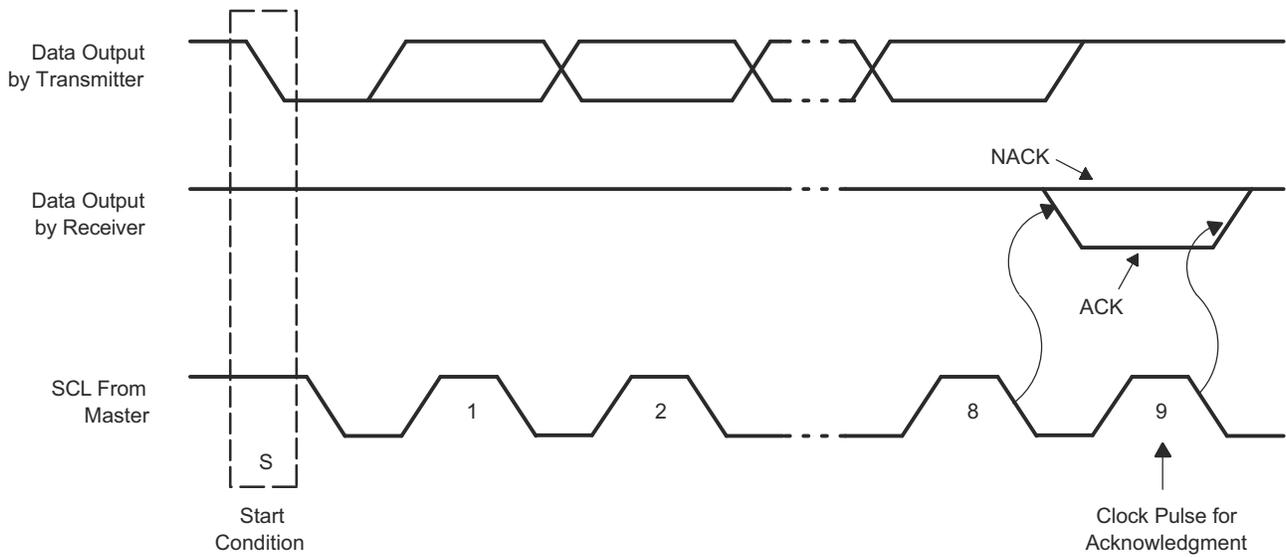


图 7-6. Acknowledgment on the I²C Bus

7.4 Register Maps

表 7-1 shows the PCA9557 interface definition.

表 7-1. Interface Definition

| BYTE | BIT | | | | | | | |
|--------------------------------|---------|----|----|----|----|----|----|---------|
| | 7 (MSB) | 6 | 5 | 4 | 3 | 2 | 1 | 0 (LSB) |
| I ² C slave address | L | L | H | H | A2 | A1 | A0 | R/W |
| Px I/O data bus | P7 | P6 | P5 | P4 | P3 | P2 | P1 | P0 |

7.4.1 Device Address

The address of the PCA9557 is shown in 图 7-7.

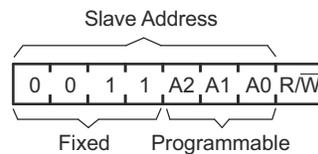


图 7-7. PCA9557 Address

The address reference of the PCA9557 is shown in 表 7-2.

表 7-2. Address Reference

| INPUTS | | | I ² C BUS TARGET ADDRESS |
|--------|----|----|-------------------------------------|
| A2 | A1 | A0 | |
| L | L | L | 24 (decimal), 18 (hexadecimal) |
| L | L | H | 25 (decimal), 19 (hexadecimal) |
| L | H | L | 26 (decimal), 1A (hexadecimal) |
| L | H | H | 27 (decimal), 1B (hexadecimal) |
| H | L | L | 28 (decimal), 1C (hexadecimal) |
| H | L | H | 29 (decimal), 1D (hexadecimal) |
| H | H | L | 30 (decimal), 1E (hexadecimal) |

表 7-2. Address Reference (续)

| INPUTS | | | I ² C BUS TARGET ADDRESS |
|--------|----|----|-------------------------------------|
| A2 | A1 | A0 | |
| H | H | H | 31 (decimal), 1F (hexadecimal) |

The last bit of the target address defines the operation (read or write) to be performed. A high (1) selects a read operation, while a low (0) selects a write operation.

7.4.2 Control Register And Command Byte

Following the successful acknowledgment of the address byte, the bus controller sends a command byte that is stored in the control register in the PCA9557. Two bits of this data byte state the operation (read or write) and the internal registers (input, output, polarity inversion or configuration) that is affected. This register is written or read through the I²C bus. The command byte is sent only during a write transmission.

Once a new command byte has been sent, the register that was addressed continues to be accessed by reads until a new command byte has been sent. 图 7-8 shows the PCA9557 control register bits.




图 7-8. Control Register Bits

表 7-3 shows the PCA9557 command byte.

表 7-3. Command Byte

| CONTROL REGISTER BITS | | COMMAND BYTE (HEX) | REGISTER | PROTOCOL | POWER-UP DEFAULT |
|-----------------------|----|--------------------|--------------------|-----------------|------------------|
| B1 | B0 | | | | |
| 0 | 0 | 0x00 | Input Port | Read byte | xxxx xxxx |
| 0 | 1 | 0x01 | Output Port | Read/write byte | 0000 0000 |
| 1 | 0 | 0x02 | Polarity Inversion | Read/write byte | 1111 0000 |
| 1 | 1 | 0x03 | Configuration | Read/write byte | 1111 1111 |

7.4.3 Register Descriptions

The input port register (register 0) reflects the incoming logic levels of the pins, regardless of whether the pin is defined as an input or an output by the configuration register. It only acts on read operation. Writes to these registers have no effect. The default value, X, is determined by the externally applied logic level.

Before a read operation, a write transmission is sent with the command byte to signal the I²C device that the input port register will be accessed next. See [表 7-4](#).

表 7-4. Register 0 (Input Port Register)

| BIT | I7 | I6 | I5 | I4 | I3 | I2 | I1 | I0 |
|---------|----|----|----|----|----|----|----|----|
| DEFAULT | X | X | X | X | X | X | X | X |

The output port register (register 1) shows the outgoing logic levels of the pins defined as outputs by the configuration register. Bit values in this register have no effect on pins defined as inputs. In turn, reads from this register reflect the value that is in the flip-flop controlling the output selection, not the actual pin value. See [表 7-5](#).

表 7-5. Register 1 (Output Port Register)

| BIT | O7 | O6 | O5 | O4 | O3 | O2 | O1 | O0 |
|---------|----|----|----|----|----|----|----|----|
| DEFAULT | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

The polarity inversion register (register 2) allows polarity inversion of pins defined as inputs by the configuration register. If a bit in this register is set (written with 1), the corresponding port pin's polarity is inverted. If a bit in this register is cleared (written with a 0), the corresponding port pin's original polarity is retained. See [表 7-6](#).

表 7-6. Register 2 (Polarity Inversion Register)

| BIT | N7 | N6 | N5 | N4 | N3 | N2 | N1 | N0 |
|---------|----|----|----|----|----|----|----|----|
| DEFAULT | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 |

The configuration register (register 3) configures the directions of the I/O pins. If a bit in this register is set to 1, the corresponding port pin is enabled as an input with high impedance output driver. If a bit in this register is cleared to 0, the corresponding port pin is enabled as an output. See [表 7-7](#).

表 7-7. Register 3 (Configuration Register)

| BIT | C7 | C6 | C5 | C4 | C3 | C2 | C1 | C0 |
|---------|----|----|----|----|----|----|----|----|
| DEFAULT | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

7.4.3.1 Bus Transactions

Data is exchanged between the master and PCA9557 through write and read commands.

7.4.3.1.1 Writes

Data is transmitted to the PCA9557 by sending the device address and setting the least-significant bit (LSB) to a logic 0 (see Figure 7-7 for device address). The command byte is sent after the address and determines which register receives the data that follows the command byte. There is no limitation on the number of data bytes sent in one write transmission (see Figure 7-9 and Figure 7-10).

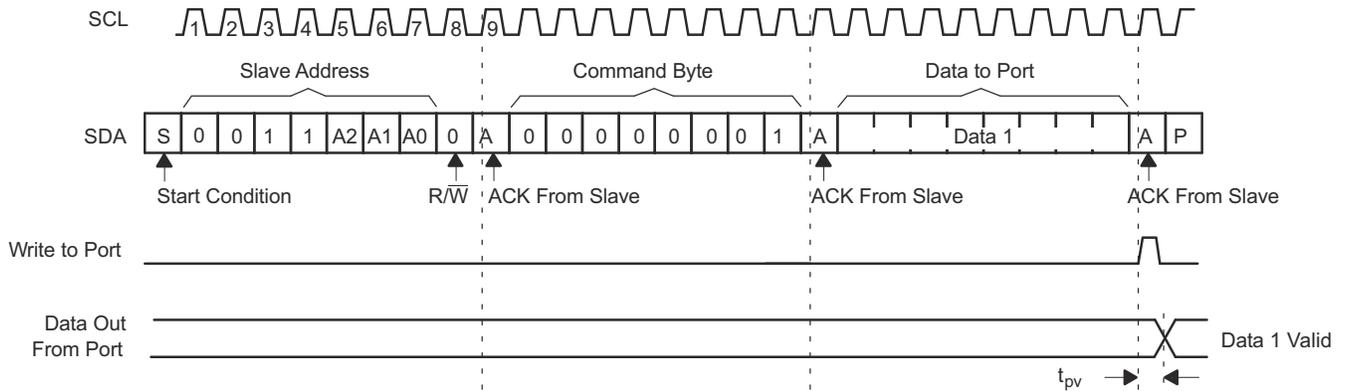


图 7-9. Write to Output Port Register

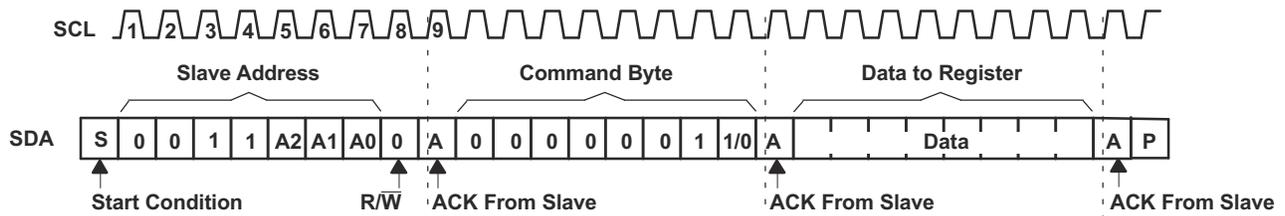


图 7-10. Write to Configuration or Polarity Inversion Registers

7.4.3.1.2 Reads

The bus master first must send the PCA9557 address with the LSB set to a logic 0 (see 图 7-7 for device address). The command byte is sent after the address and determines which register is accessed. After a restart, the device address is sent again but, this time, the LSB is set to a logic 1. Data from the register defined by the command byte then is sent by the PCA9557 (see 图 7-11 and 图 7-12). After a restart, the value of the register defined by the command byte matches the register being accessed when the restart occurred. Data is clocked into the register on the rising edge of the ACK clock pulse. There is no limitation on the number of data bytes received in one read transmission, but when the final byte is received, the bus master must not acknowledge the data.


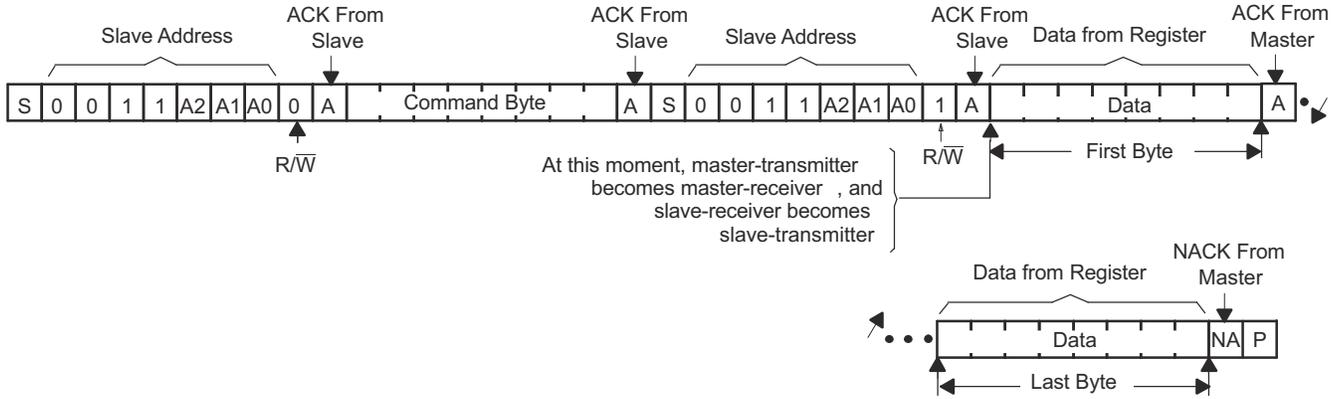


图 7-11. Read From Register

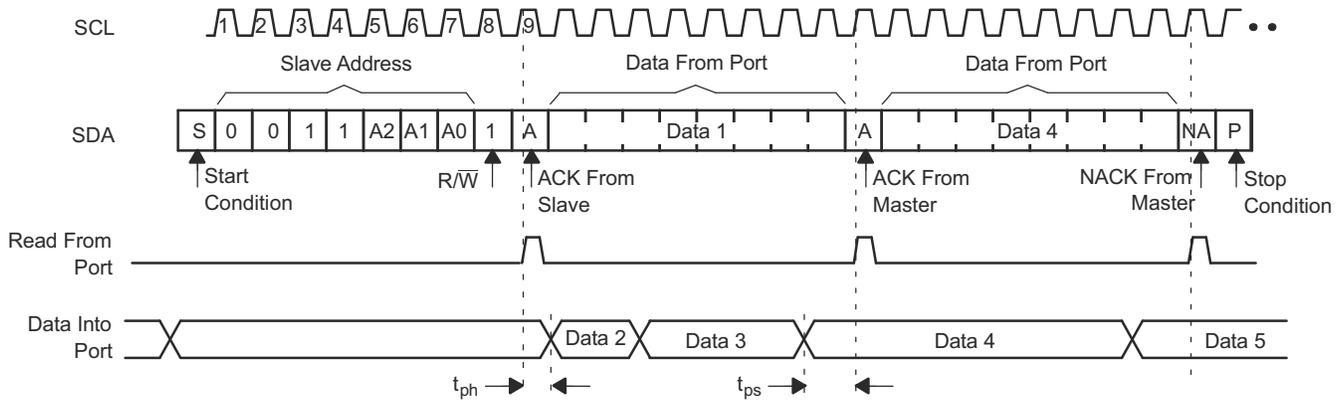

- A. This figure assumes the command byte has been previously programmed with 00h.
- B. Transfer of data can be stopped at any moment by a stop condition. When this occurs, data present at the last acknowledge phase is valid (output mode). Input data is lost.
- C. This figure eliminates the command byte transfer, a restart, and slave address call between the initial slave address call and actual data transfer from the P port (see 图 7-11).

图 7-12. Read Input Port Register

8 Application and Implementation


备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

8.1 Application Information

图 8-1 shows an application in which the PCA9557 can be used.

8.2 Typical Application

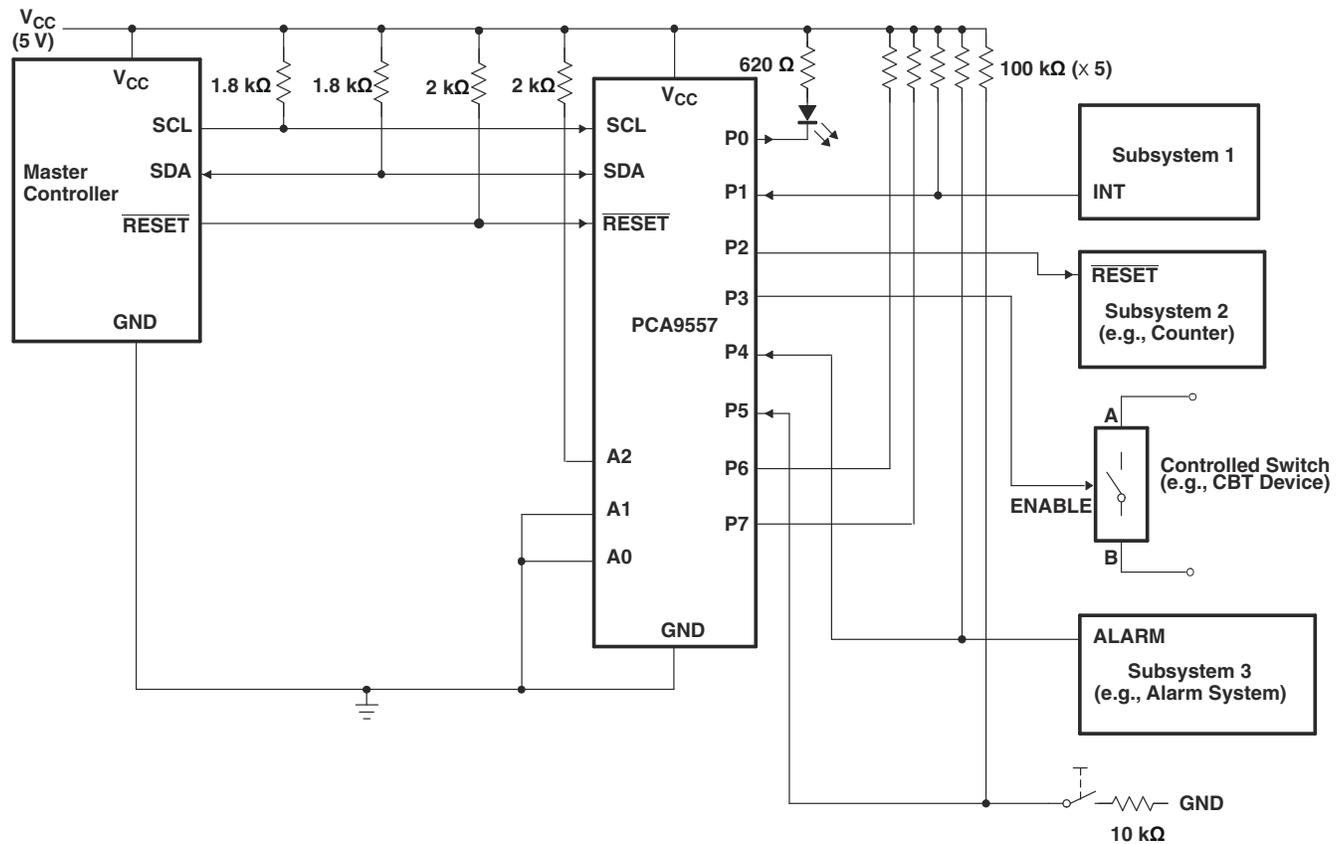

- Device address is configured as 0011100 for this example.
- P1, P4, and P5 are configured as inputs.
- P0, P2, and P3 are configured as outputs.
- P6 and P7 are not used and must be configured as outputs.

图 8-1. Typical Application

8.2.1 Detailed Design Procedure

8.2.1.1 Minimizing I_{CC} when I/O is Used to Control LED

When an I/O is used to control an LED, normally it is connected to V_{CC} through a resistor as shown in 图 8-1. The LED acts as a diode so, when the LED is off, the I/O V_{IN} is about 1.2 V less than V_{CC} . The ΔI_{CC} parameter in the 节 5.5 table shows how I_{CC} increases as V_{IN} becomes lower than V_{CC} . Designs needing to minimize current consumption, such as battery power applications, should consider maintaining the I/O pins greater than or equal to V_{CC} when the LED is off.

图 8-2 shows a high-value resistor in parallel with the LED. 图 8-3 shows V_{CC} less than the LED supply voltage by at least 1.2 V. Both of these methods maintain the I/O V_{IN} at or above V_{CC} and prevent additional supply-current consumption when the LED is off.

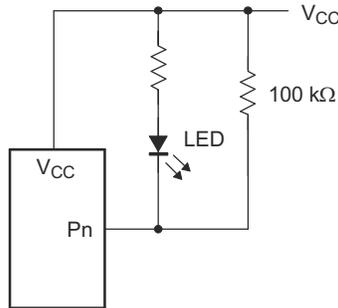


图 8-2. High-Value Resistor in Parallel with the LED

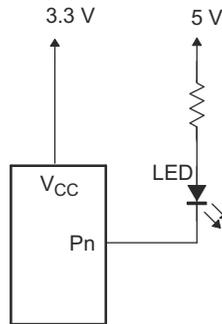


图 8-3. Device Supplied by a Low Voltage

8.3 Power Supply Recommendations

8.3.1 Power-On Reset Errata

A power-on reset condition can be missed if the V_{CC} ramps are outside specification listed in 图 8-4.

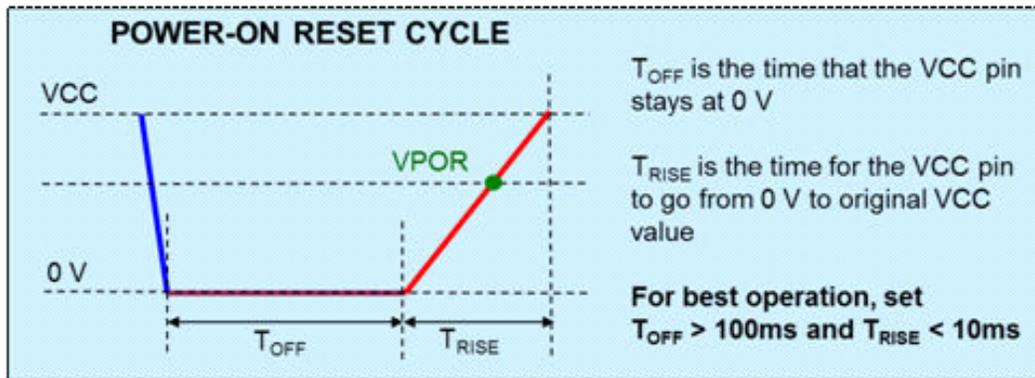


图 8-4. Power-On Reset

8.3.1.1 System Impact

As shown in the previous figure, if ramp conditions are outside timing allowance, then POR condition can be missed causing the device to lock up.

9 Device and Documentation Support

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [I2C Bus Pull-Up Resistor Calculation](#)
- Texas Instruments, [Maximum Clock Frequency of I2C Bus Using Repeaters](#)
- Texas Instruments, [Introduction to Logic](#)
- Texas Instruments, [Understanding the I2C Bus](#)
- Texas Instruments, [Choosing the Correct I2C Device for New Designs](#)

9.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates—including silicon errata—go to the product folder for your device on [ti.com](#). In the upper right-hand corner, click the *Alert me* button. This registers you to receive a weekly digest of product information that has changed (if any). For change details, check the revision history of any revised document.

9.3 支持资源

TI E2E™ 中文支持论坛是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的[使用条款](#)。

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

9.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

10 Revision History

注：以前版本的页码可能与当前版本的页码不同

| Changes from Revision J (May 2014) to Revision K (December 2024) | Page |
|--|------|
| • 更改了整个文档中的表格、图和交叉参考的编号格式..... | 1 |
| • Moved Storage Temperature Range row from <i>ESD Ratings</i> table to <i>Absolute Maximum Ratings</i> table..... | 5 |
| • Updated V_{IH} from 2.0V to 2.2V..... | 5 |
| • Add V_{IL} parameter for RESET | 5 |
| • Updated <i>Thermal Information</i> values for D, PW and RGV packages..... | 6 |
| • Updated <i>I²C Timing Requirements</i> table..... | 7 |
| • Add t_W parameter for 2.5V voltage condition..... | 8 |
| • Changed the Command Byte From: 00000001/0 To: 00000011/0 in the <i>Write Configuration or Polarity Inversion Registers</i> figure..... | 21 |

Changes from Revision I (June 2008) to Revision J (May 2014)

Page

- Added RESET Errata section..... [16](#)
 - Added Power-On Reset Errata section..... [24](#)
-

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| PCA9557D | Obsolete | Production | SOIC (D) 16 | - | - | Call TI | Call TI | -40 to 85 | PCA9557 |
| PCA9557DB | Active | Production | SSOP (DB) 16 | 80 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DB.A | Active | Production | SSOP (DB) 16 | 80 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DBR | Active | Production | SSOP (DB) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DBR.A | Active | Production | SSOP (DB) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DGVR | Active | Production | TVSOP (DGV) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DGVR.A | Active | Production | TVSOP (DGV) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557DR | Active | Production | SOIC (D) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9557 |
| PCA9557DR.A | Active | Production | SOIC (D) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PCA9557 |
| PCA9557PW | Obsolete | Production | TSSOP (PW) 16 | - | - | Call TI | Call TI | -40 to 85 | PD557 |
| PCA9557PWR | Active | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557PWR.A | Active | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557PWRG4 | Active | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557PWRG4.A | Active | Production | TSSOP (PW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | PD557 |
| PCA9557PWT | Obsolete | Production | TSSOP (PW) 16 | - | - | Call TI | Call TI | -40 to 85 | PD557 |
| PCA9557RGVR | Active | Production | VQFN (RGV) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |
| PCA9557RGVR.A | Active | Production | VQFN (RGV) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |
| PCA9557RGVRG4 | Active | Production | VQFN (RGV) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |
| PCA9557RGVRG4.A | Active | Production | VQFN (RGV) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |
| PCA9557RGYR | Active | Production | VQFN (RGY) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |
| PCA9557RGYR.A | Active | Production | VQFN (RGY) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | PD557 |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

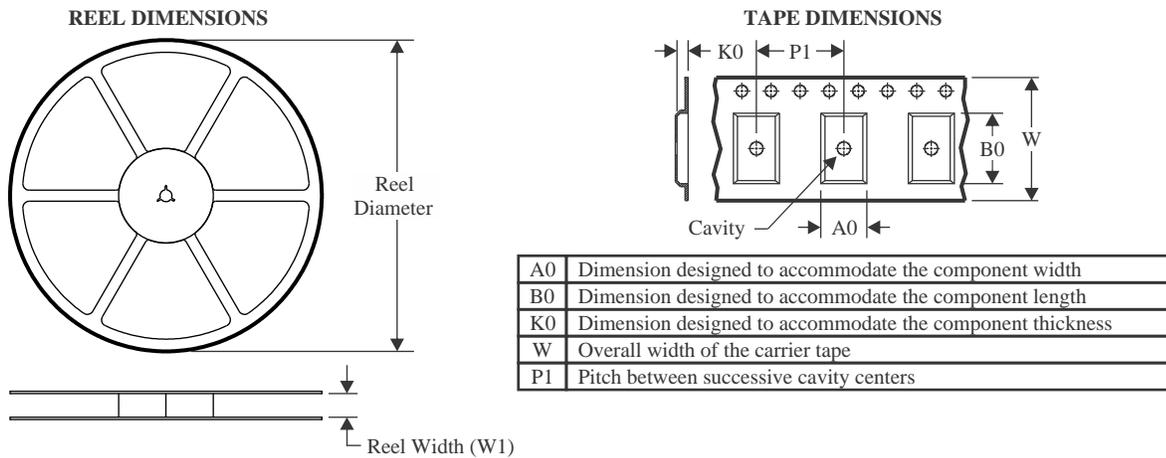TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| PCA9557DBR | SSOP | DB | 16 | 2000 | 330.0 | 16.4 | 8.35 | 6.6 | 2.4 | 12.0 | 16.0 | Q1 |
| PCA9557DGVR | TVSOP | DGV | 16 | 2000 | 330.0 | 12.4 | 6.8 | 4.0 | 1.6 | 8.0 | 12.0 | Q1 |
| PCA9557DR | SOIC | D | 16 | 2500 | 330.0 | 16.4 | 6.5 | 10.3 | 2.1 | 8.0 | 16.0 | Q1 |
| PCA9557DR | SOIC | D | 16 | 2500 | 330.0 | 12.4 | 3.75 | 3.75 | 1.15 | 8.0 | 12.0 | Q1 |
| PCA9557PWR | TSSOP | PW | 16 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| PCA9557PWR | TSSOP | PW | 16 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| PCA9557PWRG4 | TSSOP | PW | 16 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| PCA9557RGVR | VQFN | RGV | 16 | 2500 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| PCA9557RGVRG4 | VQFN | RGV | 16 | 2500 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| PCA9557RGR | VQFN | RGY | 16 | 3000 | 330.0 | 12.4 | 3.8 | 4.3 | 1.5 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| PCA9557DBR | SSOP | DB | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9557DGVR | TVSOP | DGV | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9557DR | SOIC | D | 16 | 2500 | 333.2 | 345.9 | 28.6 |
| PCA9557DR | SOIC | D | 16 | 2500 | 340.5 | 336.1 | 32.0 |
| PCA9557PWR | TSSOP | PW | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9557PWR | TSSOP | PW | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9557PWRG4 | TSSOP | PW | 16 | 2000 | 353.0 | 353.0 | 32.0 |
| PCA9557RGVR | VQFN | RGV | 16 | 2500 | 367.0 | 367.0 | 35.0 |
| PCA9557RGVRG4 | VQFN | RGV | 16 | 2500 | 353.0 | 353.0 | 32.0 |
| PCA9557RGYR | VQFN | RGY | 16 | 3000 | 353.0 | 353.0 | 32.0 |

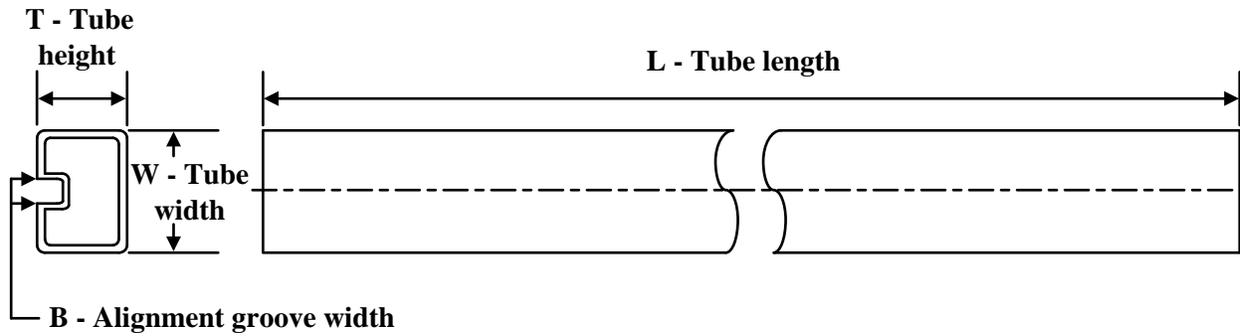
TUBE


*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| PCA9557DB | DB | SSOP | 16 | 80 | 530 | 10.5 | 4000 | 4.1 |
| PCA9557DB.A | DB | SSOP | 16 | 80 | 530 | 10.5 | 4000 | 4.1 |

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE

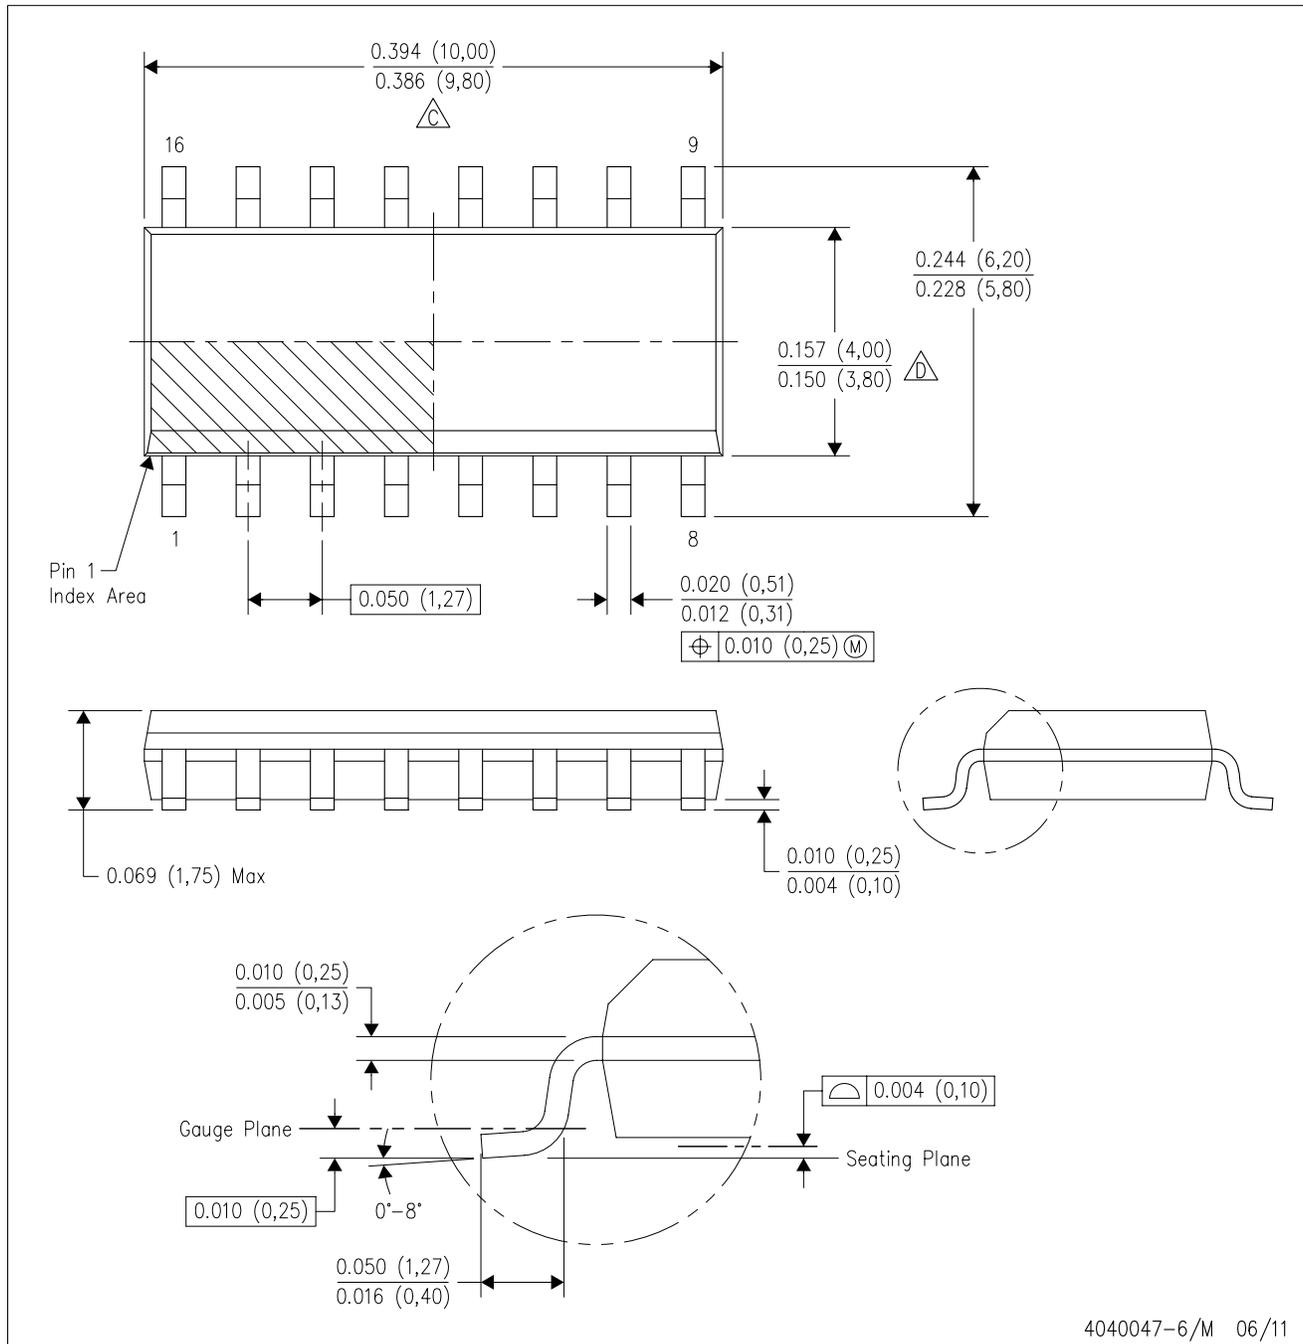

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.


DB0016A



PACKAGE OUTLINE

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

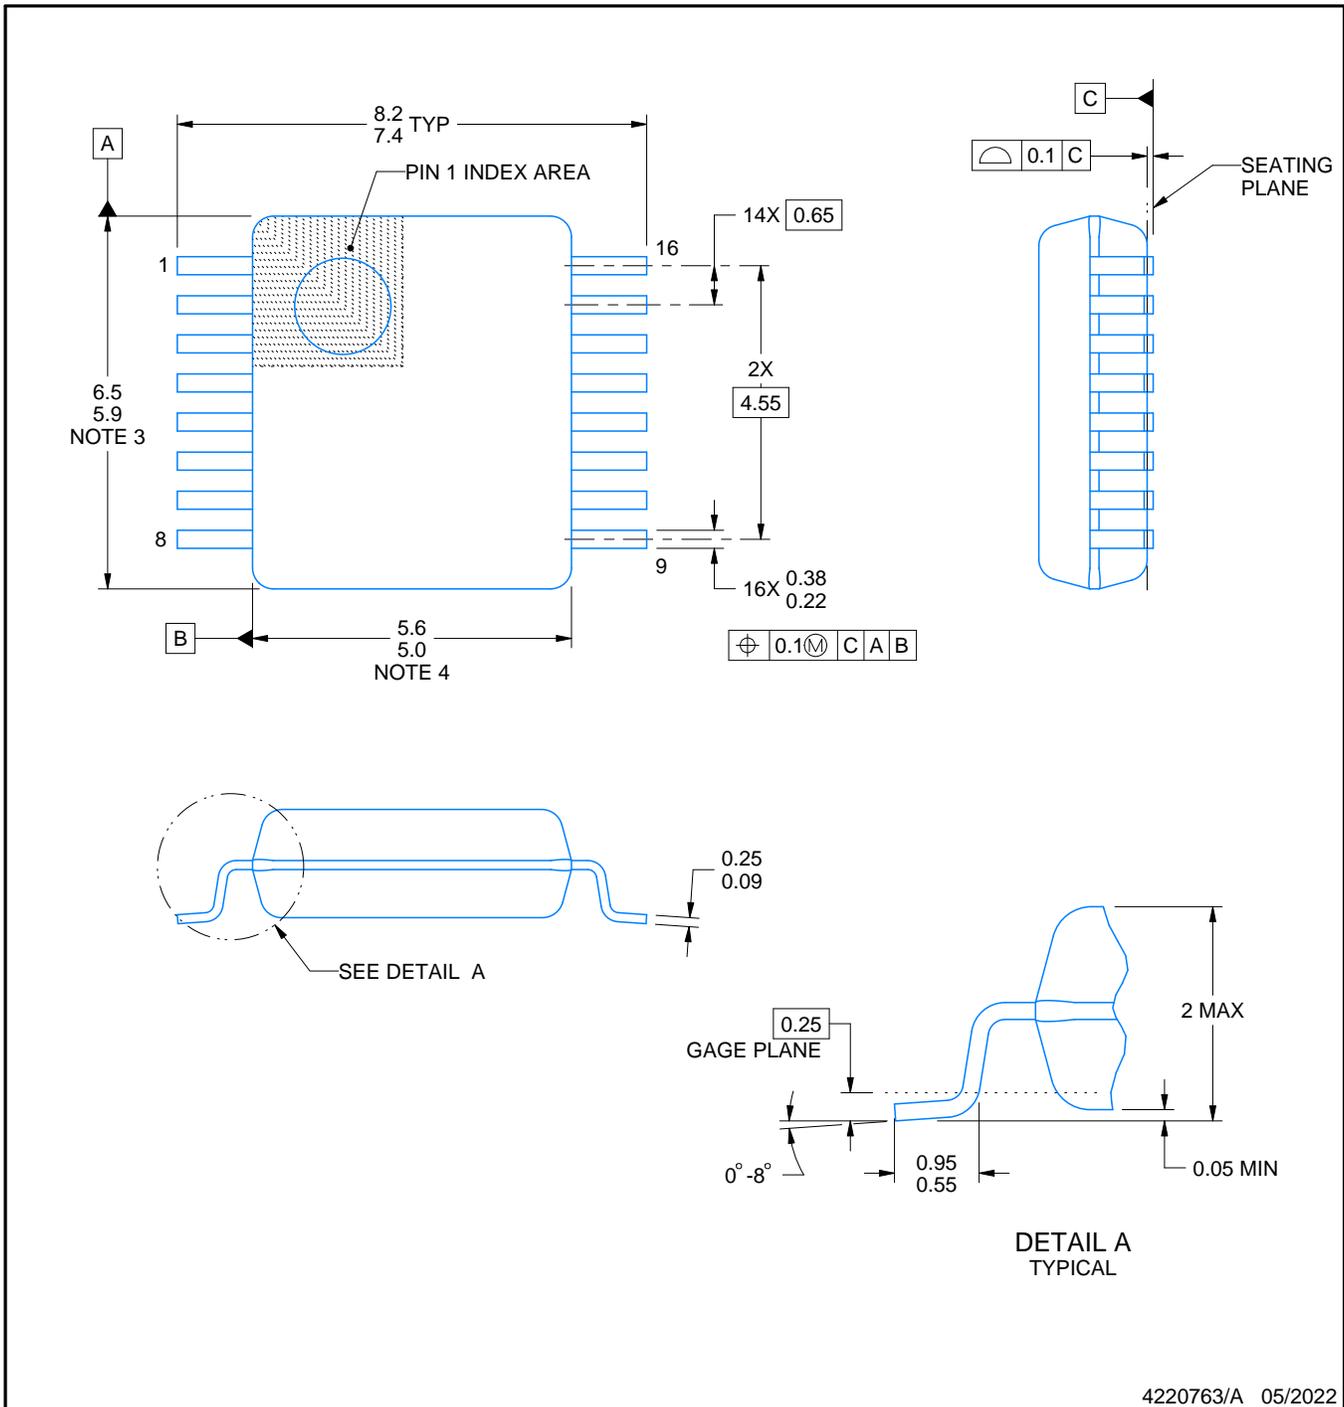

4220763/A 05/2022

NOTES:


- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.
- This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
- Reference JEDEC registration MO-150.

EXAMPLE BOARD LAYOUT


DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

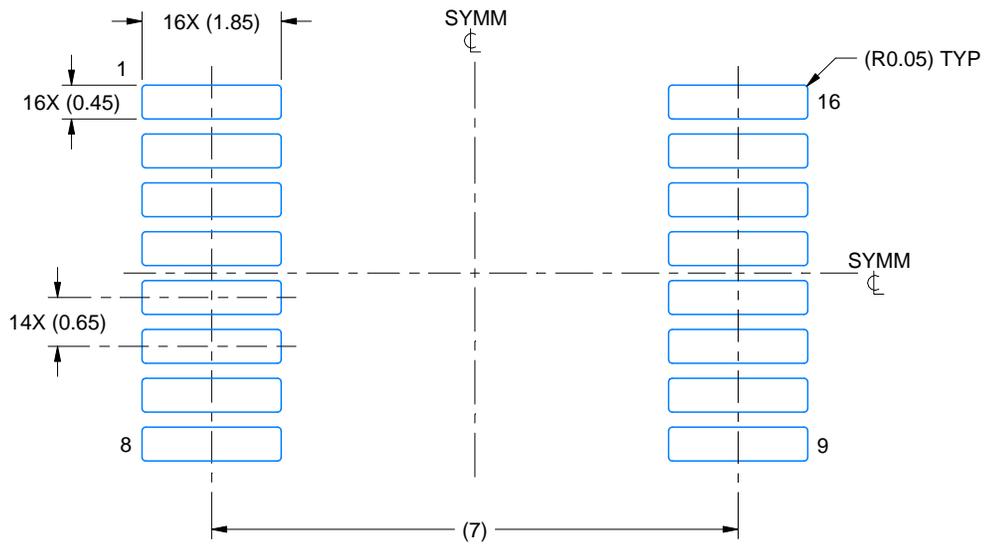

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

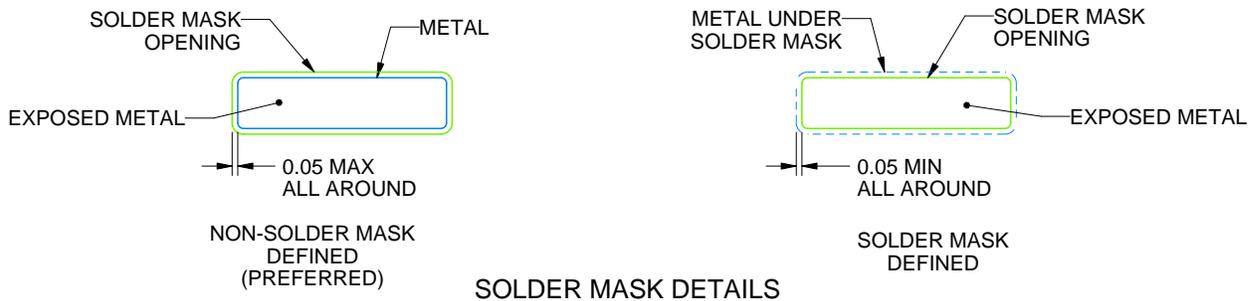

4220763/A 05/2022

NOTES: (continued)


- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DB0016A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE


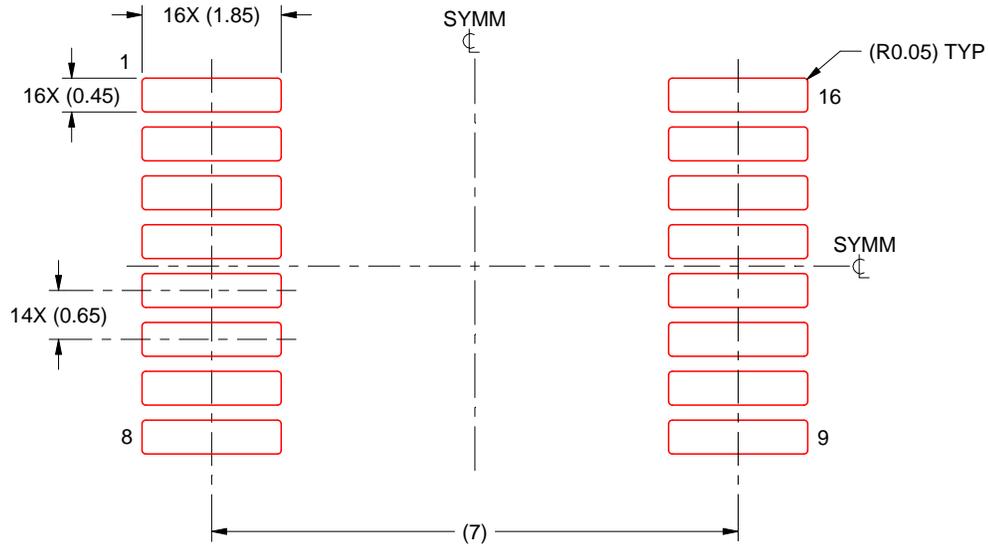


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220763/A 05/2022

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

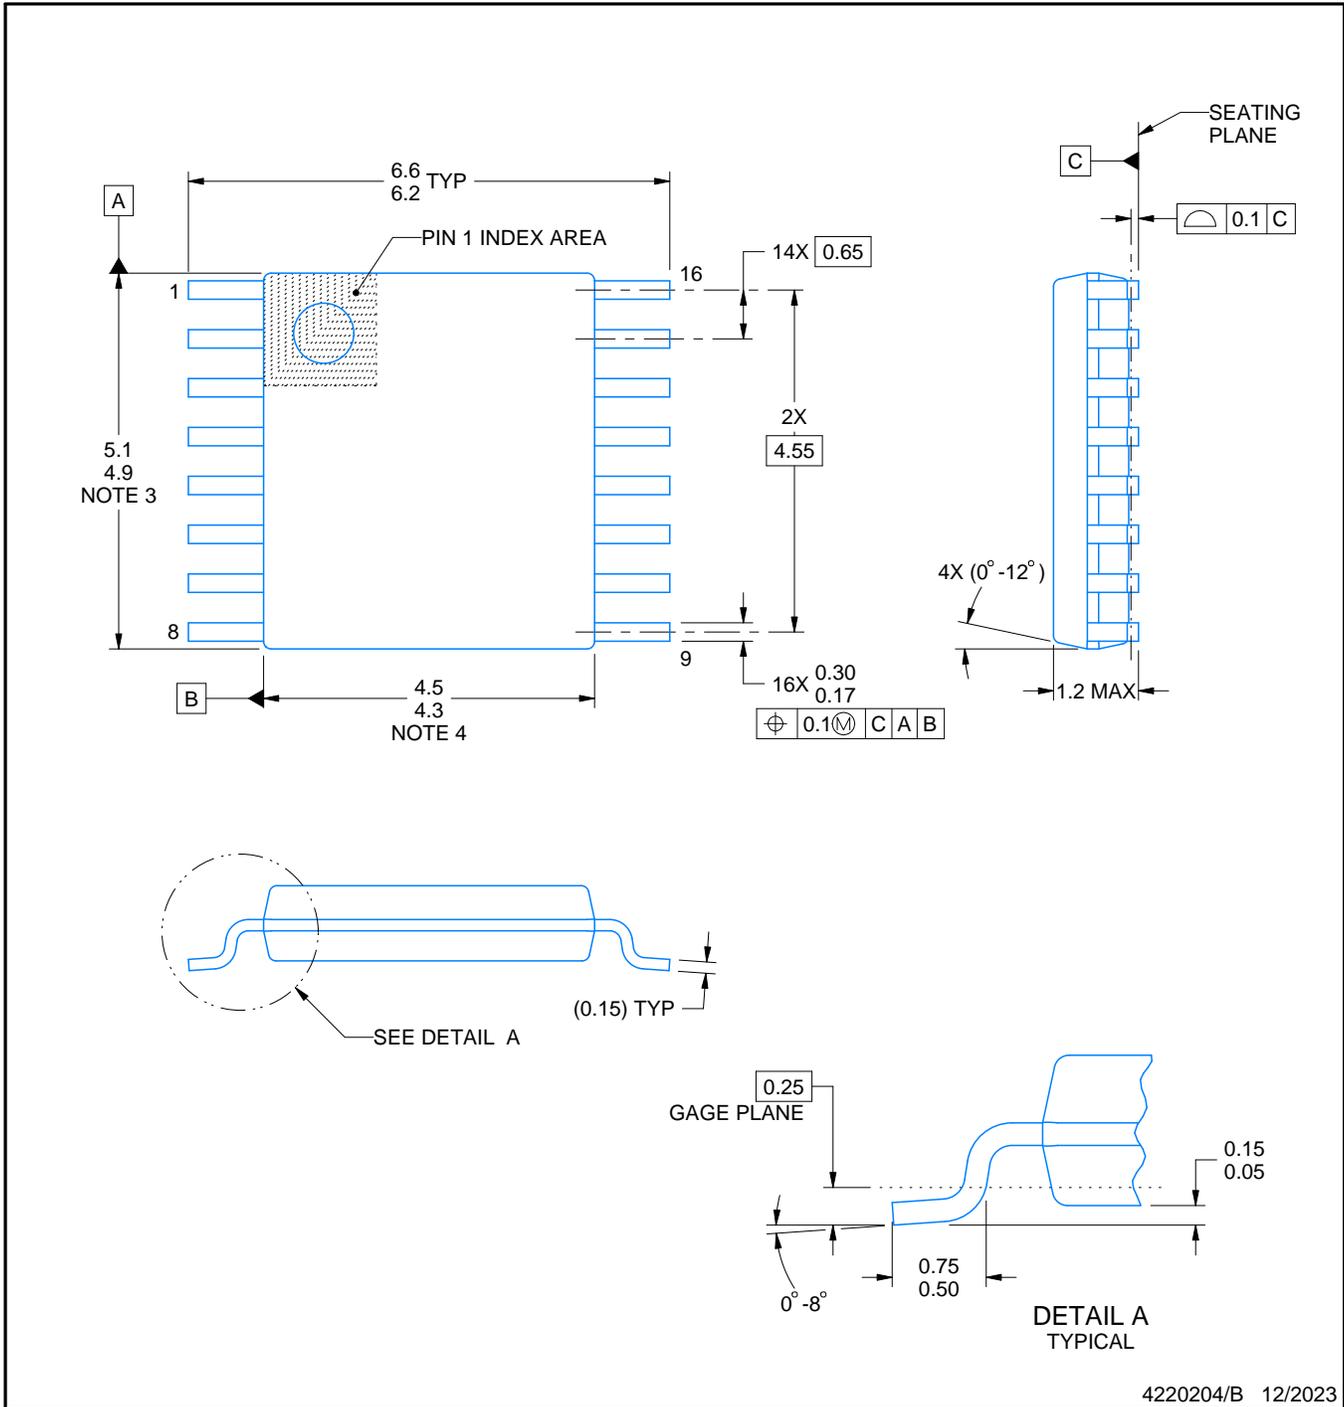

4220204/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

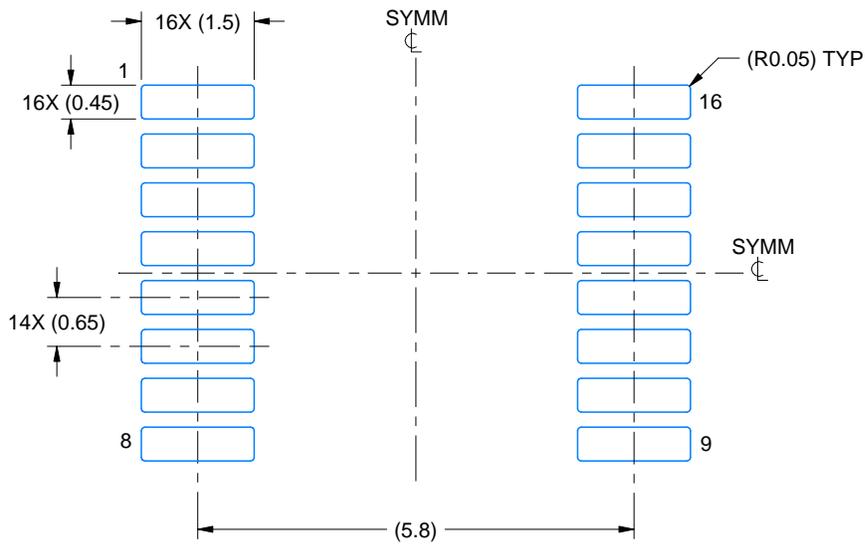

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

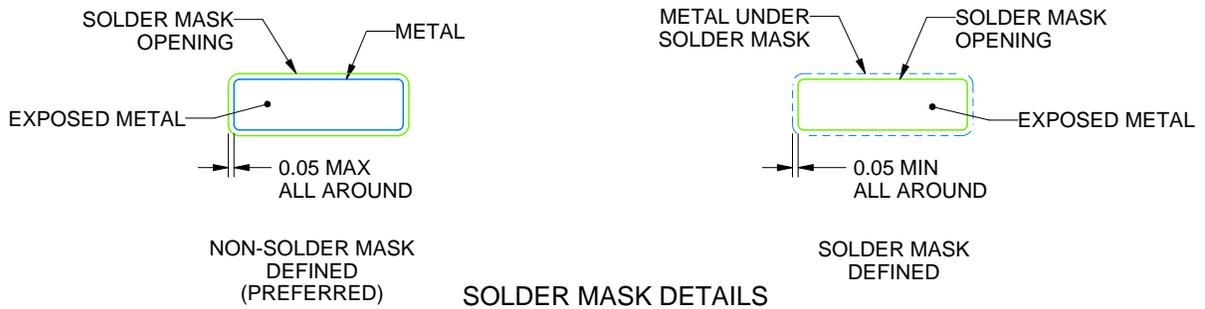

SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

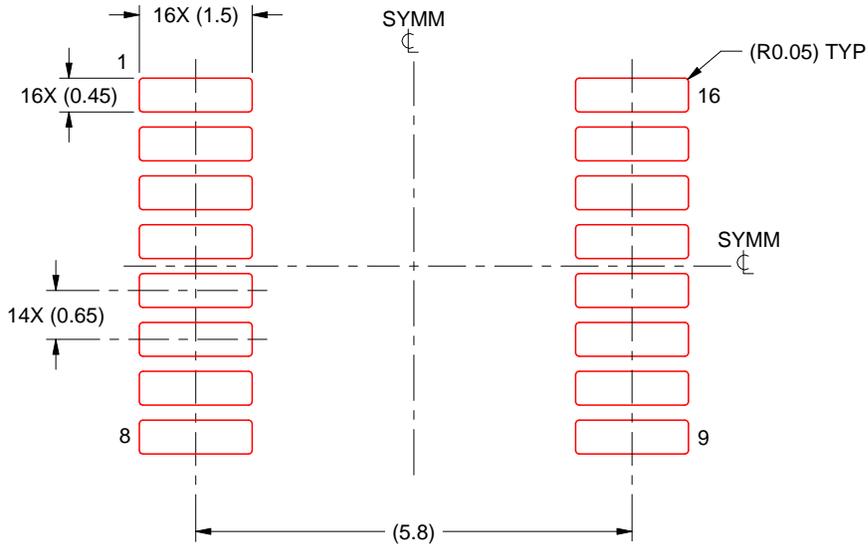

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X


4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

RGY (R-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

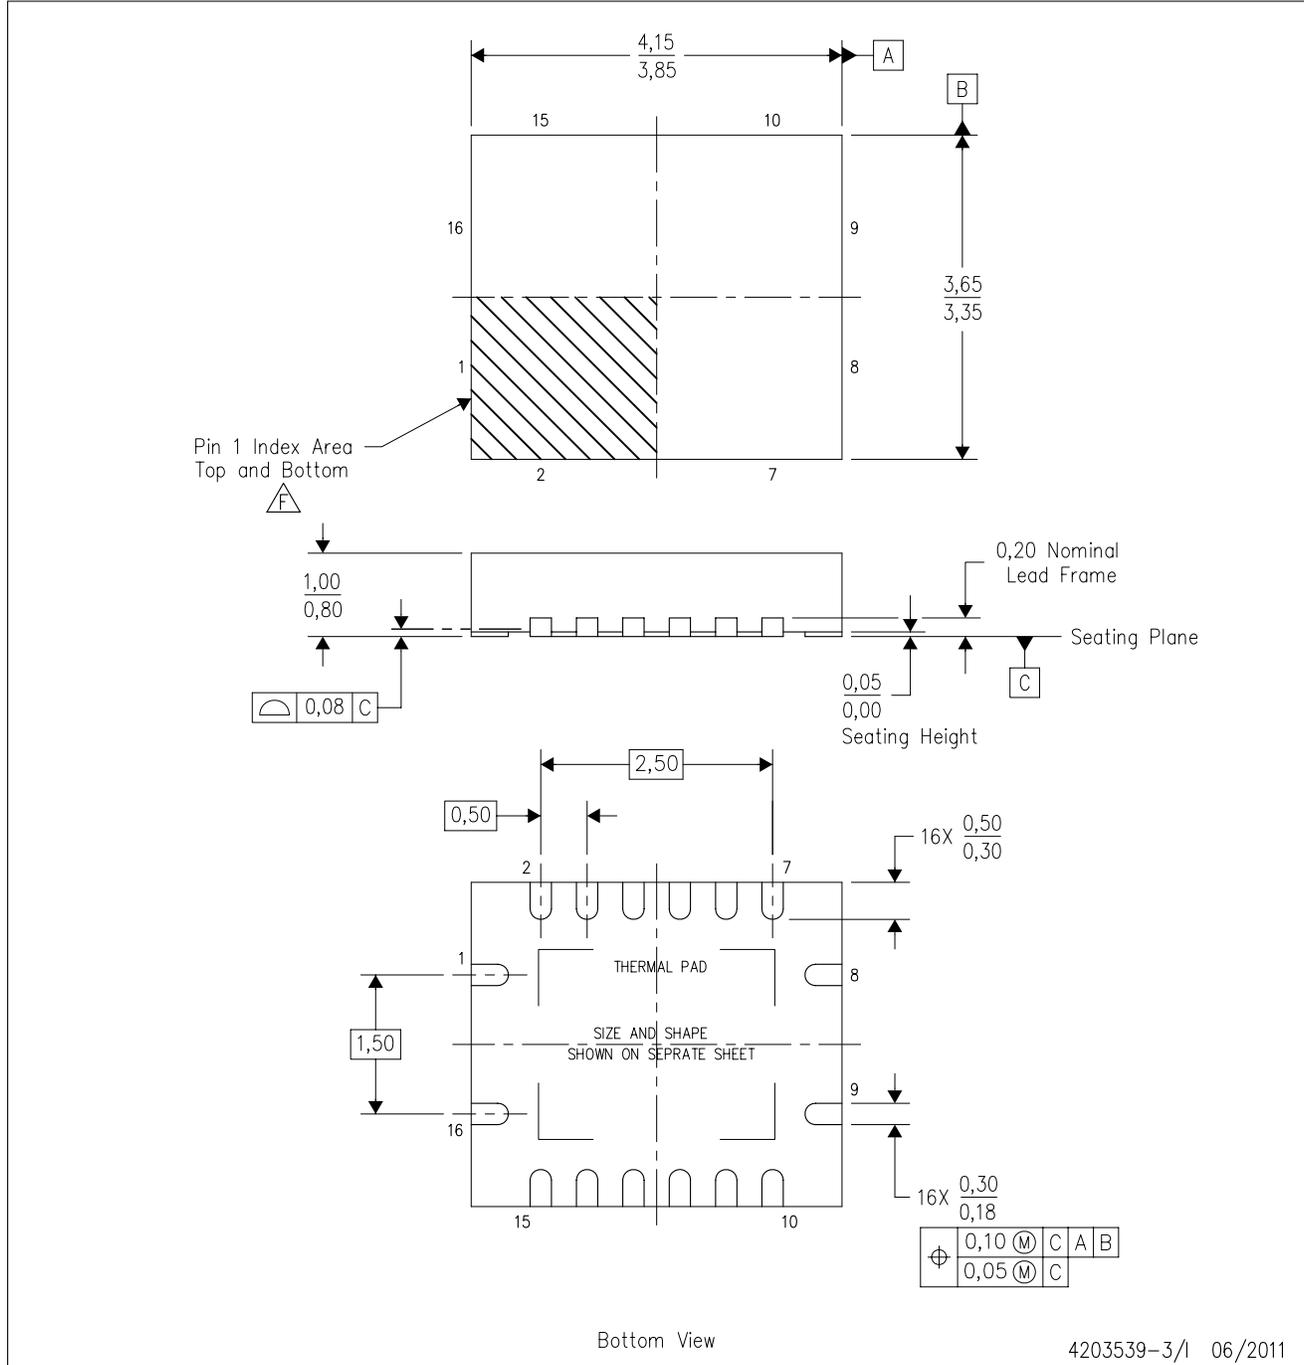

4203539-3/1 06/2011

- NOTES:
- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - This drawing is subject to change without notice.
 - QFN (Quad Flatpack No-Lead) package configuration.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
 - Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.
 - Package complies to JEDEC MO-241 variation BA.

RGY (R-PVQFN-N16)


PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

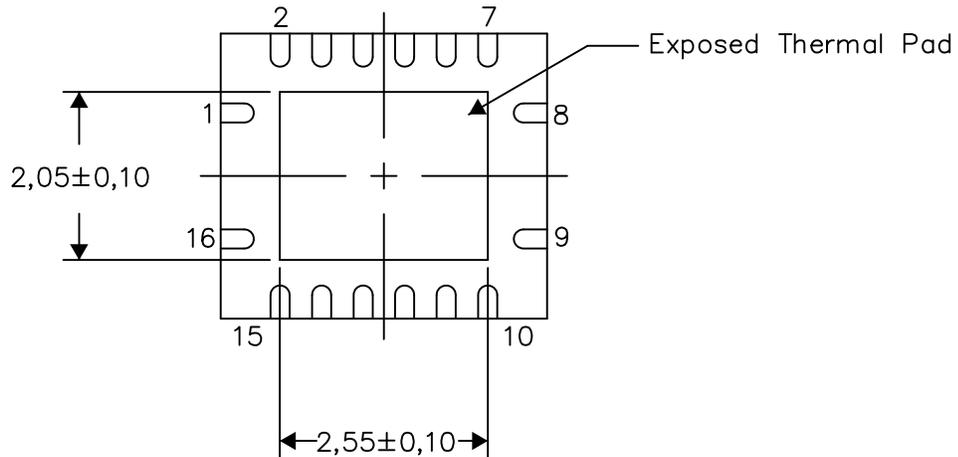

Bottom View


Exposed Thermal Pad Dimensions

4206353-3/P 03/14

NOTE: All linear dimensions are in millimeters

RGY (R-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD

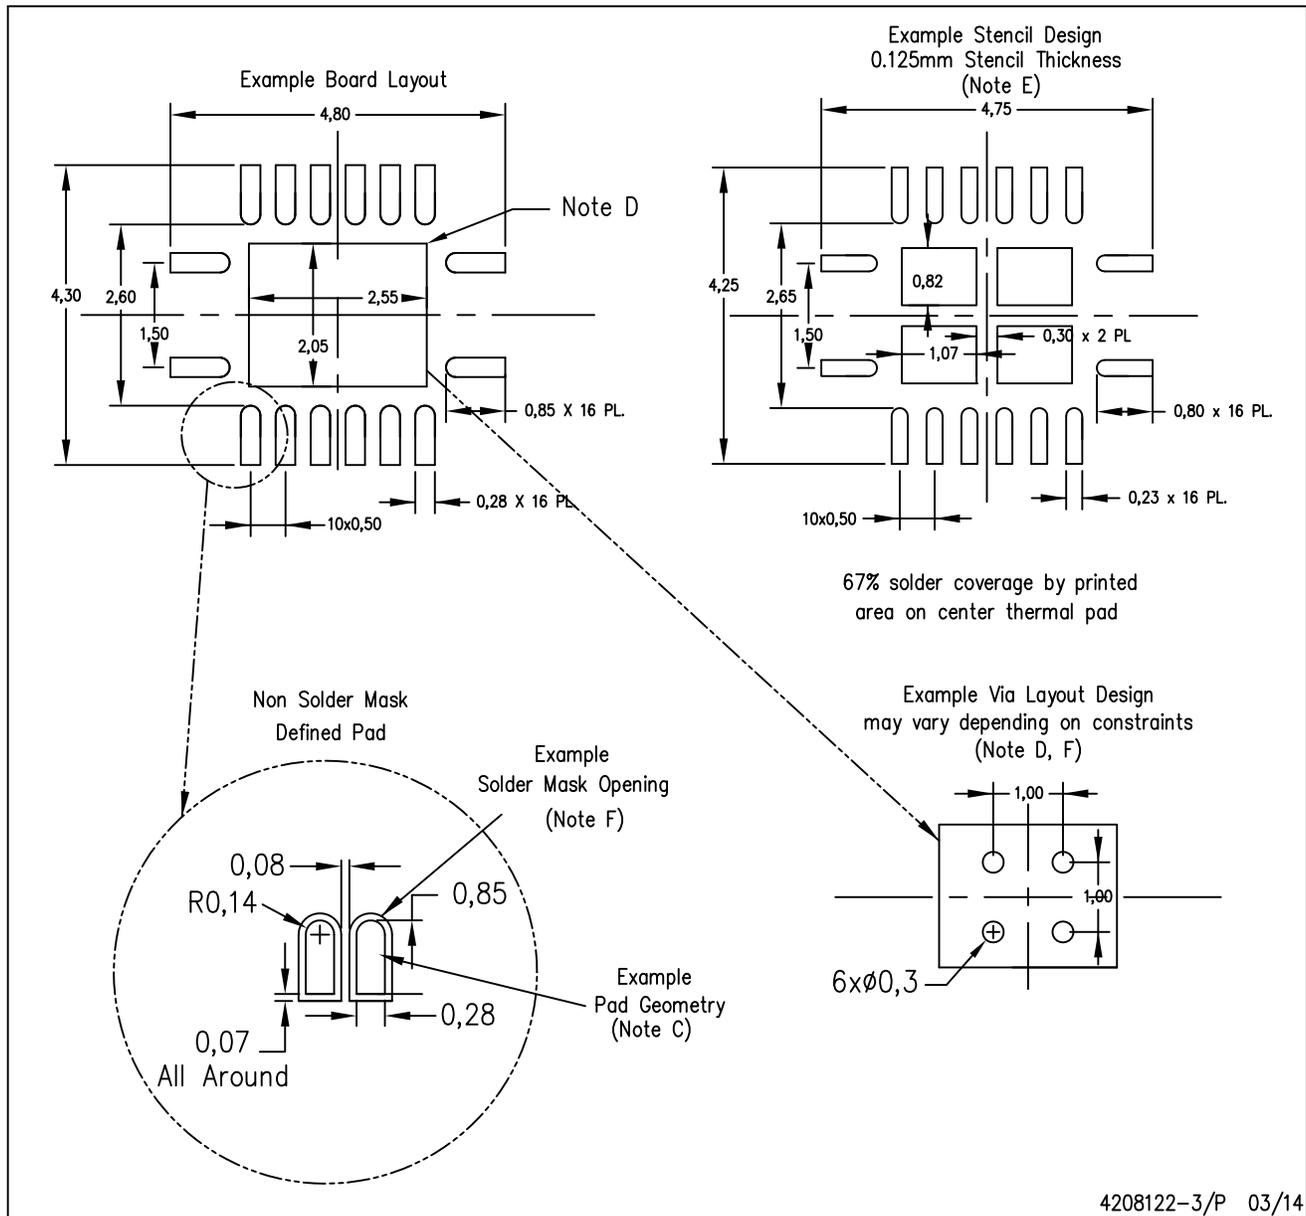

4208122-3/P 03/14

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.


GENERIC PACKAGE VIEW

RGV 16

VQFN - 1 mm max height

4 x 4, 0.65 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

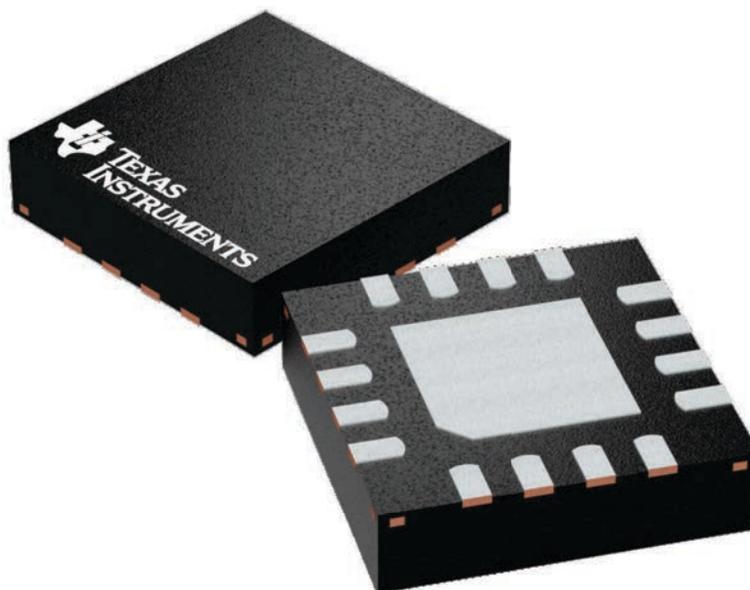

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.


4224748/A

EXAMPLE STENCIL DESIGN

RGV0016A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

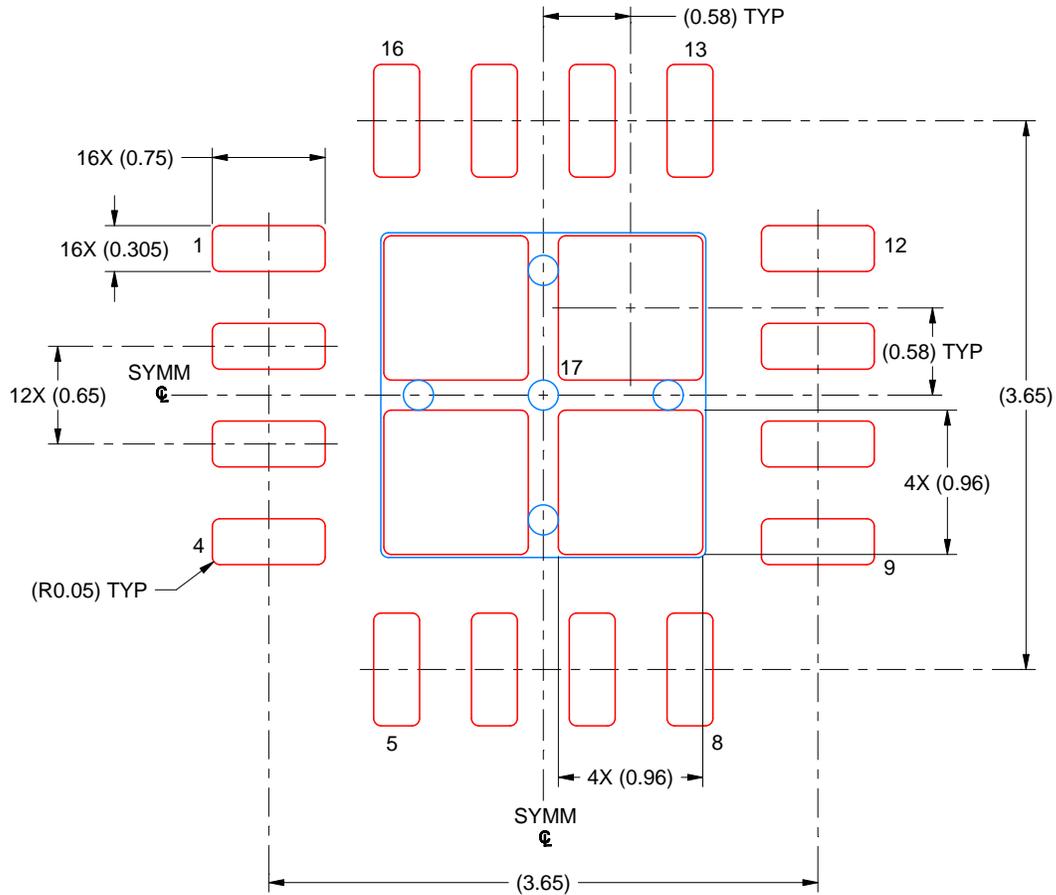

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 20X

EXPOSED PAD 17
79% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4219037/A 06/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月