

DK-LM3S9B96-FPGA README FIRST

Stellaris[®] FPGA Expansion Board

The Stellaris[®] FPGA expansion board (DK-LM3S9B96-FPGA) provides an easy way to evaluate the capabilities of the Stellaris External Peripheral Interface (EPI) using the highly integrated DK-LM3S9B96 development platform.

FPGA Expansion Board

Requirements

- You have a DK-LM3S9B96 development platform
- You have the Stellaris LM3S9B96 Development Kit Documentation and Software CD

Recommendations


- You have loaded an SD Card in the DK-LM3S9B96's SD card slot. This is only necessary for the "Save Image" function.
- A JTAG Programming cable that supports Xilinx[®] Spartan3 devices.

Board Set-Up

The FPGA expansion board interfaces to the DK-LM3S9B96 development board via the Extended Peripheral Interface connector and the LCD connection header. Before installing the FPGA expansion board, you must remove the jumpers from JP16-31 in the QVGA LCD section of the development board. If you do not remove the jumpers, the FPGA expansion board cannot be installed on the DK-LM3S9B96 development board. The jumper POT/PB4 at the bottom left of the board must also be removed. See Figure 1. DK-LM3S9B96 Development Board.

With the jumpers removed, you must then remove any expansion board that is currently fitted to the expansion connector. Boards that may be installed in this location are the SDRAM daughter board, the EPI Signal Breakout board or the Flash/SRAM/LCD daughter board. Figure 1. DK-LM3S9B96 Development Board

DK-LM3S9B96-FPGA README FIRST

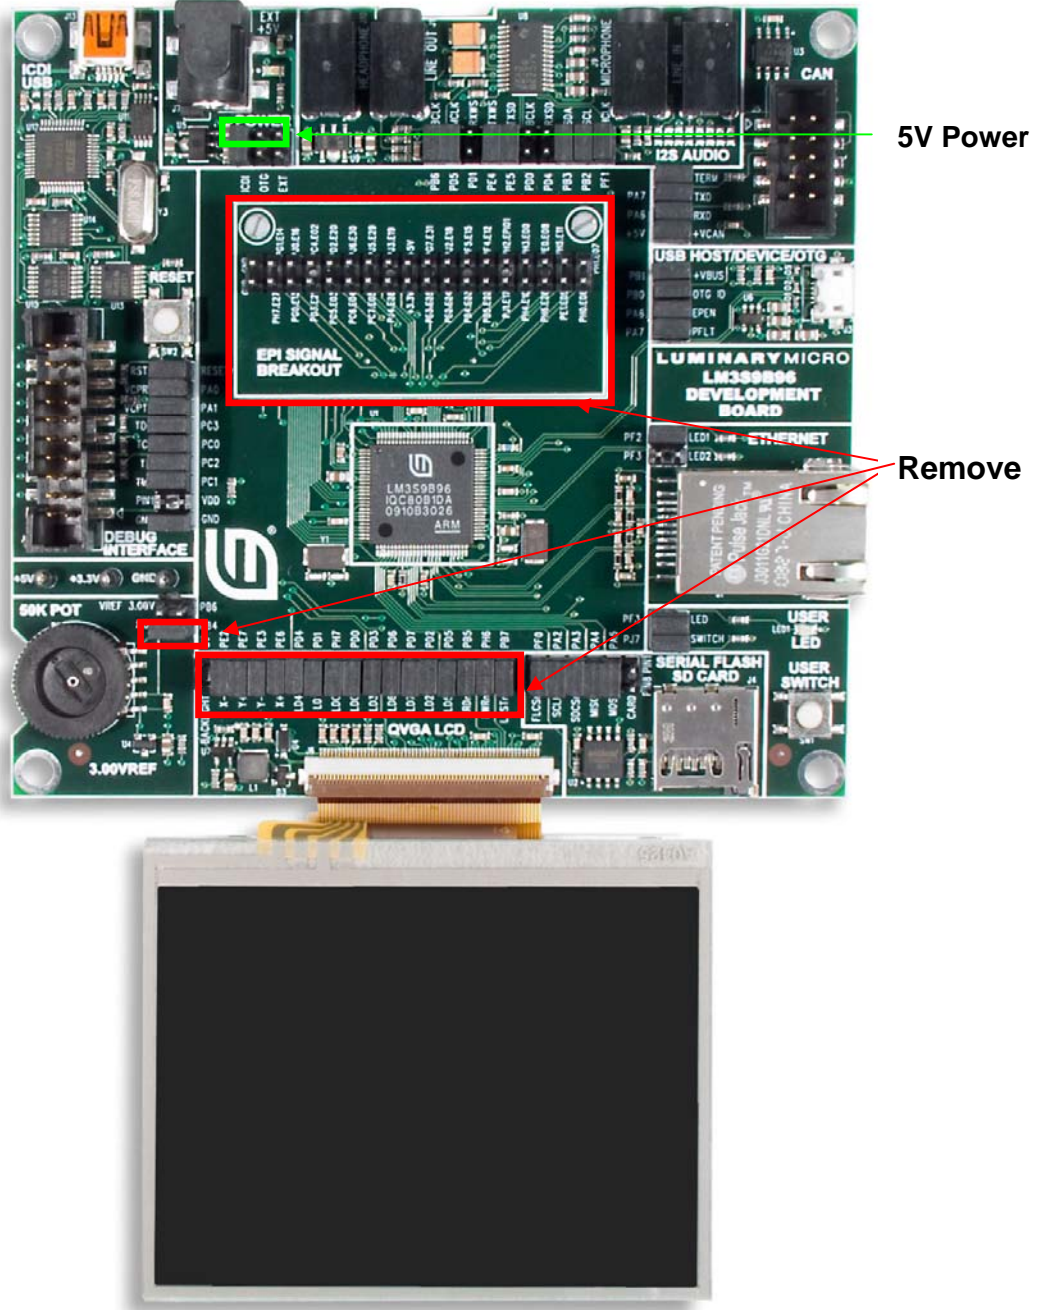

Once the jumpers and expansion boards have been removed, fit the FPGA expansion board onto the DK-LM3S9B96 development board. There is a male EPI expansion connector on the bottom side of the FPGA expansion board that connects to the female EPI expansion

DK-LM3S9B96-FPGA README FIRST

connector of the DK-LM3S9B96 development board (J2). Since the FPGA expansion board also interfaces to the LCD, there are holes to fit the LCD header pins through the PCB.

Once the expansion board is connected to the EPI and LCD interfaces, use the included jumper wire to provide 5 V power to J5 (immediately above the JTAG port on the daughter board) from any of the three upper pins immediately below and to the right of the “EXT +5V” connector on the development board (as shown in Figure 1).

VideoCap Application

The “videocap” example application illustrates communication with the FPGA and is provided in the StellarisWare® software release for the DK-LM3S9B96 development kit. The FPGA expansion board’s configuration PROM comes pre-loaded with the binary image required by the videocap application, so no FPGA-specific tools are required.

If you installed StellarisWare in the default installation directory, you can find the videocap application source in the following location:

```
C:\StellarisWare\boards\dk-lm39b96\
```

Lower level subdirectories contain binaries for the application built with each supported toolchain. These binaries can be downloaded to the dk-lm3s9b96 board using the LM Flash Programmer tool. When you run the videocap application, it automatically connects to the FPGA and begins displaying the camera image on the LCD.

You can find the videocap application in version 5879 or later of the StellarisWare distribution. Download the latest version of StellarisWare from the ti.com/stellaris web site at

<http://focus.ti.com/mcu/docs/mcuorphan.tsp?contentId=87903>

The application has the following functions:

- **Pan / Zoom**
Touch and Drag on the touchscreen to pan the image. Click the “Scale” button to toggle between 2x scaled view and full screen view.
- **Save Image to Disk**
If an SD Card is installed, click the “Freeze” and then “Save” buttons to save the camera image as a .bmp file.
- **Image Quality Controls**
The Controls panel allows for real-time adjustment of the brightness, saturation, and contrast of the image.

DK-LM3S9B96-FPGA README FIRST

References

The following references are included on the Stellaris LM3S9B96 Development Kit Documentation and Software CD and are also available for download at the www.ti.com/stellaris web site:

- *Stellaris LM3S9B96 Development Kit User's Manual* (publication number DK-LM3S9B96)
- *DK-LM3S9B96 Firmware Development Package User's Guide* (publication number SW-DK-LM3S9B96-UG)
- DK-LM3S9B96 Firmware Development Package (order number SW-DK-LM3S9B96)
- *Stellaris[®] Peripheral Driver Library User's Guide* (publication number SW-DRL-UG)
- *Stellaris LM3S9B96 Microcontroller Data Sheet* (publication number DS-LM3S9B96)

Copyright © 2010 Texas Instruments, Inc. All rights reserved. Stellaris and StellarisWare are registered trademarks of Texas Instruments. ARM and Thumb are registered trademarks, and Cortex is a trademark of ARM Limited. Other names and brands may be claimed as the property of others.

Texas Instruments
108 Wild Basin Rd., Suite 350
Austin, TX 78746
<http://www.ti.com/stellaris>



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	dsp.ti.com	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2010, Texas Instruments Incorporated