

# 具有内部基准电压的 DACx0508 八通道 16/14/12 位 SPI 电压输出 DAC

## 1 特性

- 性能
  - INL:  $\pm 1$ LSB, 16 位分辨率时最高
  - TUE: FSR 最大值为  $\pm 0.1\%$
- 集成 2.5V 精密内部基准电压
  - 初始精度:  $\pm 5$ mV (最大值)
  - 低温漂: 2ppm/°C (典型值), DAC80508
- 高驱动能力: 20mA, 0.5V 电源轨
- 灵活的输出配置
  - 用户可选增益: 2、1 或  $\frac{1}{2}$
  - 复位至零标度或中标度
  - 清除输出函数: DACx0508C
- 宽运行范围:
  - 电源电压: 2.7V 至 5.5V
  - 温度范围:  $-40^{\circ}\text{C}$  至  $125^{\circ}\text{C}$
- 50MHz SPI 兼容型串行接口
  - 1.7V 至 5.5V 运行
  - 菊链运行方式
  - CRC 误差校验
- 低功耗: 0.6mA/通道 (5.5V)
- 小型封装:
  - 3mm x 3mm, 16 引脚 WQFN
  - 2.4mm x 2.4mm, 16 引脚 DSBGA

## 2 应用

- 光纤网络
- 无线基础设施
- 工业自动化
- 数据采集系统

## 3 说明

DACx0508 是低功耗八通道缓冲电压输出数模转换器 (DAC) 引脚兼容系列中的一员, 具有 16/14/12 分辨率。DACx0508 包括一个 2.5V (5ppm/°C) 内部基准电压, 消除了大多数应用中所需的外部精密基准。用户可选增益配置提供 1.25V (增益 =  $\frac{1}{2}$ )、2.5V (增益 = 1) 或 5V (增益 = 2) 满量程输出电压。该器件由单个 2.7V 至 5.5V 电源供电, 具有单调性, 并能提供  $\pm 1$  LSB INL 的高线性度。

DACx0508 通过一个运行时钟速率高达 50MHz 的串行接口进行通信。VIO 引脚使串行接口可在 1.7V 至 5.5V 范围内运行。DACx0508 灵活接口支持使用广泛的行业标准微处理器和微控制器。

DACx0508 采用了上电复位电路, 以便进行上电并将 DAC 输出保持在零电平或中间电平, 直到在该器件中写入一个有效代码。该器件耗用低至 0.6mA/通道 (5.5V) 的电流, 因此适用于依靠电池供电的设备。按通道断电功能将器件电流消耗量降低至 15 $\mu$ A。


DACx0508 采用小型封装, 可在  $-40^{\circ}\text{C}$  至  $+125^{\circ}\text{C}$  的温度范围内正常运行。

器件信息<sup>(1)</sup>

| 器件型号     | 封装         | 封装尺寸 (标称值)      |
|----------|------------|-----------------|
| DACx0508 | WQFN (16)  | 3.00mm x 3.00mm |
|          | DSBGA (16) | 2.40mm x 2.40mm |

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

简化方框图

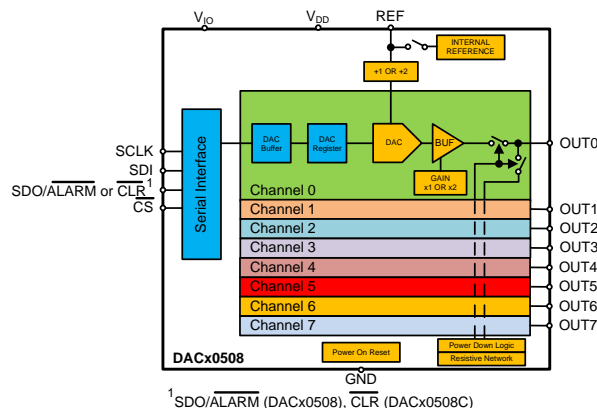

## 目录

|          |  |           |           |   |           |
|----------|--|-----------|-----------|---|-----------|
| 1        | 特性 .....                                     | 1         | 8.5       | Programming .....                           | 28        |
| 2        | 应用 .....                                     | 1         | 8.6       | Register Map .....                          | 30        |
| 3        | 说明 .....                                     | 1         | <b>9</b>  | <b>Application and Implementation .....</b> | <b>36</b> |
| 4        | 修订历史记录 .....                                 | 2         | 9.1       | Application Information .....               | 36        |
| 5        | <b>Device Comparison Table .....</b>         | <b>4</b>  | 9.2       | Typical Application .....                   | 38        |
| 6        | <b>Pin Configuration and Functions .....</b> | <b>5</b>  | <b>10</b> | <b>Power Supply Recommendations .....</b>   | <b>40</b> |
| 7        | <b>Specifications .....</b>                  | <b>6</b>  | <b>11</b> | <b>Layout .....</b>                         | <b>41</b> |
| 7.1      | Absolute Maximum Ratings .....               | 6         | 11.1      | Layout Guidelines .....                     | 41        |
| 7.2      | ESD Ratings .....                            | 6         | 11.2      | Layout Examples .....                       | 41        |
| 7.3      | Recommended Operating Conditions .....       | 6         | <b>12</b> | <b>器件和文档支持 .....</b>                        | <b>43</b> |
| 7.4      | Thermal Information .....                    | 7         | 12.1      | 相关链接 .....                                  | 43        |
| 7.5      | Electrical Characteristics .....             | 7         | 12.2      | 接收文档更新通知 .....                              | 43        |
| 7.6      | Typical Characteristics .....                | 10        | 12.3      | 社区资源 .....                                  | 43        |
| <b>8</b> | <b>Detailed Description .....</b>            | <b>20</b> | 12.4      | 商标 .....                                    | 43        |
| 8.1      | Overview .....                               | 20        | 12.5      | 静电放电警告 .....                                | 43        |
| 8.2      | Functional Block Diagram .....               | 20        | 12.6      | 术语表 .....                                   | 43        |
| 8.3      | Feature Description .....                    | 21        | <b>13</b> | <b>机械、封装和可订购信息 .....</b>                    | <b>43</b> |
| 8.4      | Device Functional Modes .....                | 25        |           |   |           |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision C (April 2018) to Revision D  | Page |
|---|------|
| • 已更改在“特性”中将 TUE 从 $\pm 0.14\%$ 更改为 $0.1\%$ .....   | 1    |
| • 已更改在“特性”中将“低温票”从 $5\text{ppm}/^\circ\text{C}$ 更改为 $2\text{ppm}/^\circ\text{C}$ 并且添加了 DAC80508 .....   | 1    |
| • 已添加在“特性”中增加了“清除输出函数：DACx0508C” .....  | 1    |
| • 已删除在“特性”中删除了 4 线制模式 .....   | 1    |
| • 已删除在“说明”的第二段中删除了“4 线制” .....  | 1    |
| • 已删除从“器件信息”中删除了 DAC80508 产品预览脚注 .....  | 1    |
| • Deleted Product Preview from DAC80508Z and DAC80508M in <a href="#">Device Comparison Table</a> .....   | 4    |
| • Added DAC80508ZC and DAC80508MC to <a href="#">Device Comparison Table</a> .....  | 4    |
| • Added DAC60508ZC and DAC60508MC to <a href="#">Device Comparison Table</a> .....  | 4    |
| • Added DACx0508 to SDO/ $\overline{\text{ALARM}}$ pin description in Pin Functions .....   | 5    |
| • Added $\overline{\text{CLR}}$ pin (DACx0508C) in Pin Functions .....  | 5    |
| • Changed SCLK, SDI, SDO/ $\overline{\text{ALARM}}$ and $\overline{\text{CS}}$ to Digital pins for Pin voltage in <a href="#">Absolute Maximum Ratings</a> .....      | 6    |
| • Added Total unadjusted error, DAC80508. All Gains row in <a href="#">Electrical Characteristics</a> .....   | 7    |
| • Added Offset error, DAC80508. WQFN and BGA packages. All gains. row in <a href="#">Electrical Characteristics</a> .....   | 7    |
| • Added Full-scale error, DAC80508. All gains row in <a href="#">Electrical Characteristics</a> .....   | 7    |
| • Added Gain error, DAC80508 row in <a href="#">Electrical Characteristics</a> .....  | 7    |
| • Changed Short circuit current, DAC code = full scale. Output shorted to GND TYP from 35 mA to 30 mA in <a href="#">Electrical Characteristics</a> .....             | 8    |
| • Changed Short circuit current, DAC code = zero scale. Output shorted to $V_{\text{DD}}$ TYP from 30 mA to 35 mA in <a href="#">Electrical Characteristics</a> ..... | 8    |
| • Added Channel to Channel DC crosstalk, DAC80508. Measured channel at midscale. Adjacent channel at full scale in <a href="#">Electrical Characteristics</a> .....   | 8    |
| • Added Channel to Channel DC crosstalk, DAC80508. Measured channel at midscale. All other channels at full scale in <a href="#">Electrical Characteristics</a> ..... | 8    |
| • Added Reference output drift, DAC80508 in <a href="#">Electrical Characteristics</a> .....  | 9    |
| • Added Reference thermal hysteresis, DAC80508. First cycle in <a href="#">Electrical Characteristics</a> .....   | 9    |

**修订历史记录 (接下页)**

|   |    |
|---|----|
| • Added SDO/ $\overline{\text{ALARM}}$ to DIGITAL OUTPUTS heading in <a href="#">Electrical Characteristics</a> .....                                   | 9  |
| • Deleted $I_{\text{DD}}$ , Power-down max value in <a href="#">Electrical Characteristics</a> .....  | 9  |
| • Changed <a href="#">Figure 1</a> to <a href="#">Figure 18</a> .....   | 10 |
| • Changed <a href="#">Figure 20</a> to <a href="#">Figure 28</a> .....  | 12 |
| • Changed <a href="#">Figure 34</a> .....   | 14 |
| • Changed <a href="#">Figure 35</a> .....   | 14 |
| • Changed <a href="#">Figure 37</a> .....   | 15 |
| • Changed <a href="#">Figure 38</a> .....   | 15 |
| • Added <a href="#">Figure 43</a> .....   | 16 |
| • Added <a href="#">Figure 44</a> .....   | 16 |
| • Changed <a href="#">Figure 58</a> .....   | 18 |
| • Deleted 4-wire from paragraph in <a href="#">Overview</a> section .....   | 20 |
| • Added paragraph to <a href="#">Overview</a> section .....   | 20 |
| • Changed SDO/ $\overline{\text{ALARM}}$ to SDO/ $\overline{\text{ALARM}}$ or $\overline{\text{CLR}}$ in <a href="#">Functional Block Diagram</a> ..... | 20 |
| • Added <a href="#">CLEAR Operation (DACx0508C only)</a> section .....  | 22 |
| • Added <a href="#">Figure 61</a> .....   | 23 |
| • Deleted four-wire from <a href="#">Programming</a> section .....  | 28 |
| • Added $\overline{\text{CLR}}$ pulse in <a href="#">Table 7</a> .....  | 28 |
| • Added $\overline{\text{CLR}}$ delay and note in <a href="#">Table 7</a> .....   | 28 |
| • Changed table note for <a href="#">Table 8</a> .....  | 30 |
| • Added CLR-4TO7-MSK and CLR-0TO3-MSK bits for DACx0508C only to <a href="#">Figure 71</a> .....  | 34 |
| • Added table note to <a href="#">Figure 71</a> .....   | 34 |
| • Added CLR-4TO7-MSK and CLR-0TO3-MSK bits for DACx0508C only to <a href="#">Table 13</a> .....   | 34 |

**Changes from Revision B (January 2018) to Revision C**
**Page**

|  |   |
|--|---|
| • 已更改 在数据表标题和页脚中将 DAC80508Z、DAC70508Z、DAC60508Z、DAC80508M、DAC70508M、DAC60508M 更改为 DAC80508、DAC70508、DAC60508 ..... | 1 |
| • 已更改 在“器件信息”表的说明中将 DAC80508Z 和 DAC80508M 更改成 DAC80508 .....   | 1 |

**Changes from Revision A (December 2017) to Revision B**
**Page**

|   |    |
|---|----|
| • 已添加 将 2.4mm x 2.4mm, 16 引脚 DSBGA 添加到了 特性 .....  | 1  |
| • 已添加 将 DSBGA (16) 封装添加至器件信息 .....  | 1  |
| • Added DSBGA pinout .....  | 5  |
| • Added DSBGA package pin number column to Pin Functions table .....                                    | 5  |
| • Added DSBGA package pin number column to Pin Functions table .....                                    | 6  |
| • Added YZF column to Thermal Information .....   | 7  |
| • Added Offset error test conditions and DSBGA package specific row to Electrical Characteristics ..... | 7  |
| • Added DSBGA Layout Example .....  | 42 |



**Changes from Original (June 2017) to Revision A**
**Page**

|                              |   |
|------------------------------|---|
| • 已更改 将“预告信息”更改为“混合状态” ..... | 1 |
|------------------------------|---|

## 5 Device Comparison Table

| DEVICE     | RESOLUTION | REFERENCE                     | RESET    | SDO OR $\overline{\text{CLR}}$ OPERATION |
|------------|------------|-------------------------------|----------|--|
| DAC80508Z  | 16-Bit     | Internal (default) / External | Zero     | $\overline{\text{SDO}}$                  |
| DAC80508ZC |            |                               |          | $\overline{\text{CLR}}$                  |
| DAC80508M  |            |                               | Midscale | $\overline{\text{SDO}}$                  |
| DAC80508MC |            |                               |          | $\overline{\text{CLR}}$                  |
| DAC70508Z  | 14-Bit     | Internal (default) / External | Zero     | $\overline{\text{SDO}}$                  |
| DAC70508M  |            |                               | Midscale | $\overline{\text{SDO}}$                  |
| DAC60508Z  | 12-Bit     | Internal (default) / External | Zero     | $\overline{\text{SDO}}$                  |
| DAC60508ZC |            |                               |          | $\overline{\text{CLR}}$                  |
| DAC60508M  |            |                               | Midscale | $\overline{\text{SDO}}$                  |
| DAC60508MC |            |                               |          | $\overline{\text{CLR}}$                  |

## 6 Pin Configuration and Functions

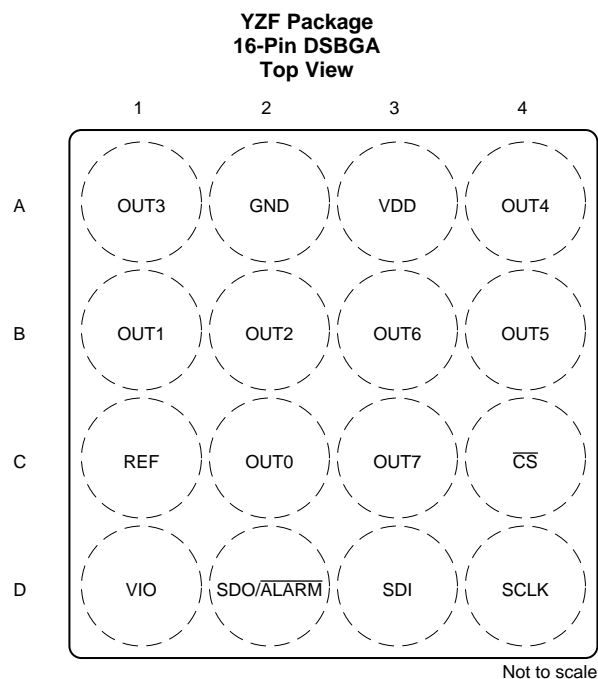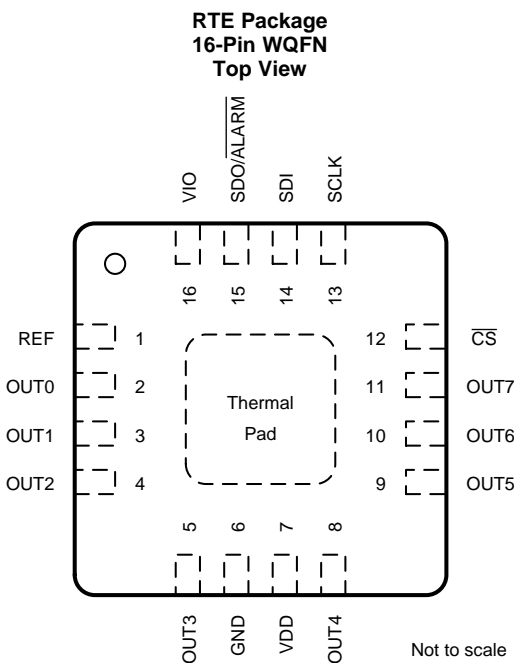

### Pin Functions

| NAME                    | PIN      |           | TYPE | DESCRIPTION   |
|-------------------------|----------|-----------|------|---|
|                         | WQFN NO. | DSBGA NO. |      |   |
| REF                     | 1        | C1        | I/O  | When using internal reference, this is the reference output voltage pin (default). When using an external reference, this is the reference input pin to the device.   |
| OUT0                    | 2        | C2        | O    | Analog output voltage from DAC 0.   |
| OUT1                    | 3        | B1        | O    | Analog output voltage from DAC 1.   |
| OUT2                    | 4        | B2        | O    | Analog output voltage from DAC 2.   |
| OUT3                    | 5        | A1        | O    | Analog output voltage from DAC 3.   |
| GND                     | 6        | A2        | GND  | Ground reference point for all circuitry on the device.   |
| VDD                     | 7        | A3        | PWR  | Analog supply voltage (2.7 V to 5.5 V).   |
| OUT4                    | 8        | A4        | O    | Analog output voltage from DAC 4.   |
| OUT5                    | 9        | B4        | O    | Analog output voltage from DAC 5.   |
| OUT6                    | 10       | B3        | O    | Analog output voltage from DAC 6.   |
| OUT7                    | 11       | C3        | O    | Analog output voltage from DAC 7.   |
| $\overline{CS}$         | 12       | C4        | I    | Active low serial data enable. This input is the frame synchronization signal for the serial data. When the signal goes low, it enables the serial interface input shift register.  |
| SCLK                    | 13       | D4        | I    | Serial interface clock.   |
| SDI                     | 14       | D3        | I    | Serial interface data input. Data are clocked into the input shift register on each falling edge of the SCLK pin.   |
| SDO/ $\overline{ALARM}$ | 15       | D2        | O    | DACx0508. Serial interface data output (default). The SDO pin is in high impedance when $\overline{CS}$ pin is high. Data are clocked out of the input shift register on either rising or falling edges of the SCLK pin as specified by the FSDO bit. Alternatively the pin can be configured as an $\overline{ALARM}$ open-drain output to indicate a CRC or reference alarm event. If configured as $\overline{ALARM}$ a 10 k $\Omega$ , pull-up resistor to V <sub>IO</sub> is required. |
| $\overline{CLR}$        |          |           | I    | DACx0508C. A low value on the $\overline{CLR}$ pin causes the DAC outputs of those channels configured for clear operation to update their registers and output to the reset value: zero scale (DACx0508Z) or midscale (DACx0508M). Bringing the $\overline{CLR}$ pin high causes the device to exit clear mode.  |

**Pin Functions (continued)**

| PIN         |          |           | TYPE | DESCRIPTION   |
|-------------|----------|-----------|------|---|
| NAME        | WQFN NO. | DSBGA NO. |      |   |
| VIO         | 16       | D1        | PWR  | IO supply voltage (1.7 V to 5.5 V). This pin sets the I/O operating voltage for the serial interface.   |
| Thermal Pad | –        | –         | –    | The thermal pad is located on the bottom-side of the WQFN package. The thermal pad should be connected to any internal PCB ground plane using multiple vias for good thermal performance. |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

 over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                |   | MIN  | MAX                   | UNIT |
|----------------|---|------|-----------------------|------|
| Supply voltage | V <sub>DD</sub> to GND                      | –0.3 | 6                     | V    |
|                | V <sub>IO</sub> to GND                      | –0.3 | 6                     |      |
| Pin voltage    | DAC outputs to GND                          | –0.3 | V <sub>DD</sub> + 0.3 | V    |
|                | REF to GND                                  | –0.3 | V <sub>DD</sub> + 0.3 |      |
|                | Digital pins to GND                         | –0.3 | V <sub>IO</sub> + 0.3 |      |
| Input current  | Input current to any pin except supply pins | –10  | 10                    | mA   |
| Temperature    | Operating free-air, T <sub>A</sub>          | –40  | 125                   | °C   |
|                | Junction, T <sub>J</sub>                    | –40  | 150                   |      |
|                | Storage, T <sub>stg</sub>                   | –60  | 150                   |      |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|  |   | VALUE | UNIT |
|--|---|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per JEDEC Standard 22 Test Method A114-C.01 <sup>(1)</sup>          | ±3000 | V    |
|  | Charged-device model (CDM), per JEDEC Standard 22 Test Method C101, all pins <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                        |                                  | MIN                        | NOM | MAX                       | UNIT |
|------------------------|----------------------------------|----------------------------|-----|---------------------------|------|
| <b>POWER SUPPLY</b>    |                                  |                            |     |                           |      |
| V <sub>DD</sub>        | Analog supply voltage            | 2.7                        |     | 5.5                       | V    |
| V <sub>IO</sub>        | IO supply voltage                | 1.7                        |     | 5.5                       |      |
| <b>DIGITAL INPUTS</b>  |                                  |                            |     |                           |      |
|                        | Digital input voltage            | 0                          |     | V <sub>IO</sub>           | V    |
| <b>REFERENCE INPUT</b> |                                  |                            |     |                           |      |
| V <sub>REFIN</sub>     | V <sub>DD</sub> = 2.7 V to 3.3 V | Reference divider disabled | 1.2 | (V <sub>DD</sub> – 0.2)/2 | V    |
|                        |                                  | Reference divider enabled  | 2.4 | V <sub>DD</sub> – 0.2     |      |
|                        | V <sub>DD</sub> = 3.3 V to 5.5 V | Reference divider disabled | 1.2 | V <sub>DD</sub> /2        |      |
|                        |                                  | Reference divider enabled  | 2.4 | V <sub>DD</sub>           |      |
| <b>TEMPERATURE</b>     |                                  |                            |     |                           |      |
| T <sub>A</sub>         | Operating free-air temperature   | –40                        |     | 125                       | °C   |

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |  | DACx0508   |             | UNIT |
|-------------------------------|--|------------|-------------|------|
|                               |  | RTE (WQFN) | YZF (DSBGA) |      |
|                               |  | 16 PINS    | 16 PINS     |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 33.3       | 68.0        | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 29.5       | 0.3         | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 7.3        | 16.9        | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 0.2        | 0.2         | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 7.4        | 16.9        | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | 0.9        | n/a         | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

All minimum and maximum specifications at  $V_{DD} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{IO} = 1.7\text{ V to }5.5\text{ V}$ ,  $V_{REFIN} = 1.25\text{ V to }5.5\text{ V}$ ,  $R_{LOAD} = 2\text{ k}\Omega$  to GND,  $C_{LOAD} = 200\text{ pF to GND}$ , digital inputs at  $V_{IO}$  or GND,  $T_A = -40^\circ\text{C to }125^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                               | TEST CONDITIONS  | MIN | TYP         | MAX        | UNIT                         |
|---|--|-----|-------------|------------|------------------------------|
| <b>STATIC PERFORMANCE<sup>(1)</sup></b> |  |     |             |            |                              |
| Resolution                              | DAC80508   | 16  |             |            | Bits                         |
|   | DAC70508   | 14  |             |            |                              |
|   | DAC60508   | 12  |             |            |                              |
| INL<br>Integral nonlinearity            | DAC80508   |     | $\pm 0.5$   | $\pm 1$    | LSB                          |
|   | DAC70508   |     | $\pm 0.5$   | $\pm 1$    |                              |
|   | DAC60508   |     | $\pm 0.5$   | $\pm 1$    |                              |
| DNL<br>Differential nonlinearity        | DAC80508. Specified 16-bit monotonic   |     | $\pm 0.5$   | $\pm 1$    | LSB                          |
|   | DAC70508. Specified 14-bit monotonic   |     | $\pm 0.5$   | $\pm 1$    |                              |
|   | DAC60508. Specified 12-bit monotonic   |     | $\pm 0.5$   | $\pm 1$    |                              |
| TUE<br>Total unadjusted error           | DAC80508. All Gains  |     | $\pm 0.05$  | $\pm 0.1$  | %FSR                         |
|   | DAC70508 and DAC60508. Gain = 1 and Gain = 2   |     | $\pm 0.06$  | $\pm 0.14$ |                              |
|   | DAC70508 and DAC60508. Gain = $\frac{1}{2}$  |     | $\pm 0.1$   | $\pm 0.2$  |                              |
| Offset error                            | DAC80508. WQFN and BGA packages. All gains.  |     | $\pm 0.75$  | $\pm 1.5$  | mV                           |
|   | DAC70508 and DAC60508.<br>WQFN package: Gain = 1, Gain = 2 and Gain = $\frac{1}{2}$ .<br>DSBGA package: Gain = 2 |     | $\pm 0.75$  | $\pm 1.5$  |                              |
|   | DAC70508 and DAC60508.<br>DSBGA package: Gain = 1 and Gain = $\frac{1}{2}$                                       |     | $\pm 0.75$  | $\pm 2.5$  |                              |
| Zero-code error                         | DAC code = zero scale  |     | 0.5         | 1.5        | mV                           |
| Full-scale error                        | DAC80508. All gains  |     | $\pm 0.05$  | $\pm 0.1$  | % FSR                        |
|   | DAC70508 and DAC60508. Gain = 1 and Gain = 2   |     | $\pm 0.075$ | $\pm 0.14$ |                              |
|   | DAC70508 and DAC60508. Gain = $\frac{1}{2}$  |     | $\pm 0.1$   | $\pm 0.22$ |                              |
| Gain error                              | DAC80508   |     | $\pm 0.05$  | $\pm 0.1$  | % FSR                        |
|   | DAC70508 and DAC60508  |     | $\pm 0.05$  | $\pm 0.14$ |                              |
| Offset error drift                      |  |     | $\pm 1$     |            | $\mu\text{V}/^\circ\text{C}$ |
| Zero-code error drift                   |  |     | $\pm 2$     |            | $\mu\text{V}/^\circ\text{C}$ |
| Full-scale error drift                  |  |     | $\pm 2$     |            | ppm of FSR/ $^\circ\text{C}$ |
| Gain error drift                        |  |     | $\pm 1$     |            | ppm of FSR/ $^\circ\text{C}$ |
| Output voltage drift over time          | $T_A = 25^\circ\text{C}$ , DAC code = midscale, 1600 hours   |     | 20          |            | ppm of FSR                   |

- (1) Static performance specified with DAC outputs unloaded for all gain options, unless otherwise noted. End point fit between codes. 16-bit: Code 256 to 65280, 14-bit: Code 128 to 16127, 12-bit: Code 16 to 4031

## Electrical Characteristics (continued)

All minimum and maximum specifications at  $V_{DD} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{IO} = 1.7\text{ V to }5.5\text{ V}$ ,  $V_{REFIN} = 1.25\text{ V to }5.5\text{ V}$ ,  $R_{LOAD} = 2\text{ k}\Omega$  to GND,  $C_{LOAD} = 200\text{ pF to GND}$ , digital inputs at  $V_{IO}$  or GND,  $T_A = -40^\circ\text{C to }125^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                              | TEST CONDITIONS   | MIN  | TYP   | MAX                          | UNIT                    |
|--|---|------|-------|------------------------------|-------------------------|
| <b>OUTPUT CHARACTERISTICS</b>          |   |      |       |                              |                         |
| Voltage range                          | Gain = 2 (BUFF-GAIN = 1, REF-DIV = 0)   | 0    |       | $2 \times V_{REF}$           | V                       |
|  | Gain = 1 (BUFF-GAIN = 1, REF-DIV = 1)   | 0    |       | $V_{REF}$                    |                         |
|  | Gain = $\frac{1}{2}$ (BUFF-GAIN = 0, REF-DIV = 1)   | 0    |       | $\frac{1}{2} \times V_{REF}$ |                         |
| Output voltage headroom                | to GND or $V_{DD}$ (unloaded)   |      | 0.004 |                              | V                       |
|  | to GND or $V_{DD}$ ( $-5\text{ mA} \leq I_{OUT} \leq 5\text{ mA}$ )   | 0.15 |       |                              |                         |
|  | to GND or $V_{DD}$ ( $-10\text{ mA} \leq I_{OUT} \leq 10\text{ mA}$ )   | 0.3  |       |                              |                         |
|  | to GND or $V_{DD}$ ( $-20\text{ mA} \leq I_{OUT} \leq 20\text{ mA}$ )   | 0.5  |       |                              |                         |
| Short circuit current <sup>(2)</sup>   | DAC code = full scale. Output shorted to GND  |      | 30    |                              | mA                      |
|  | DAC code = zero scale. Output shorted to $V_{DD}$   |      | 35    |                              |                         |
| Load regulation                        | DAC code = midscale, $-10\text{ mA} \leq I_{OUT} \leq 10\text{ mA}$   |      | 85    |                              | $\mu\text{V}/\text{mA}$ |
| Maximum capacitive load <sup>(3)</sup> | $R_{LOAD} = \infty$   | 0    |       | 2                            | nF                      |
|  | $R_{LOAD} = 2\text{ k}\Omega$   | 0    |       | 10                           |                         |
| DC output impedance                    | DAC code = midscale   |      | 0.085 |                              | $\Omega$                |
|  | DAC output at GND or $V_{DD}$   |      | 15    |                              |                         |
| <b>DYNAMIC PERFORMANCE</b>             |   |      |       |                              |                         |
| Output voltage settling time           | $\frac{1}{4}$ to $\frac{3}{4}$ scale and $\frac{3}{4}$ to $\frac{1}{4}$ scale settling time to $\pm 2$ LSB, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2 |      | 5     |                              | $\mu\text{s}$           |
| Slew rate                              | $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2   |      | 1.8   |                              | $\text{V}/\mu\text{s}$  |
| Power-up time                          | DACx-PWDWN 1 to 0 transition. DAC code = full scale. $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2 <sup>(4)</sup>   |      | 12    |                              | $\mu\text{s}$           |
| Power-up glitch magnitude              | DAC code = zero scale. $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2. $C_{LOAD} = 50\text{ pF}$   |      | 25    |                              | mV                      |
| Output noise                           | 0.1 Hz to 10 Hz, DAC code = midscale, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2   |      | 14    |                              | $\mu\text{Vpp}$         |
| Output noise density                   | 1 kHz, DAC code = midscale, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2   |      | 78    |                              | nV/ $\sqrt{\text{Hz}}$  |
|  | 10 kHz, DAC code = midscale, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 2  |      | 74    |                              |                         |
|  | 1 kHz, DAC code = full scale, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 1   |      | 55    |                              |                         |
|  | 10 kHz, DAC code = full scale, $V_{DD} = 5.5\text{ V}$ , $V_{REFIN} = 2.5\text{ V}$ , Gain = 1  |      | 50    |                              |                         |
| AC PSRR                                | DAC code = midscale, frequency = 60 Hz, amplitude = 200 mV <sub>pp</sub> superimposed on $V_{DD}$   |      | 85    |                              | dB                      |
| DC PSRR                                | DAC code = midscale, $V_{DD} = 5\text{ V} \pm 10\%$   |      | 10    |                              | $\mu\text{V}/\text{V}$  |
| Code change glitch impulse             | 1 LSB change around major carrier   |      | 4     |                              | nV-s                    |
| Channel to Channel AC crosstalk        | DAC code = midscale. Code 32 to full-scale swing on adjacent channel  |      | 0.2   |                              | nV-s                    |
| Channel to Channel DC crosstalk        | DAC80508. Measured channel at midscale. Adjacent channel at full scale  |      | 5     |                              | $\mu\text{V}$           |
|  | DAC70508 and DAC60508. Measured channel at midscale. Adjacent channel at full scale   |      | 10    |                              |                         |
|  | DAC80508. Measured channel at midscale. All other channels at full scale  |      | 10    |                              |                         |
|  | DAC70508 and DAC60508. Measured channel at midscale. All other channels at full scale   |      | 80    |                              |                         |
| Digital feedthrough                    | DAC code = midscale. $f_{SCLK} = 1\text{ MHz}$ , SDO disabled   |      | 0.1   |                              | nV-s                    |
| <b>EXTERNAL REFERENCE INPUT</b>        |   |      |       |                              |                         |
| Reference input current                | $V_{REFIN} = 2.5\text{ V}$  |      | 25    |                              | $\mu\text{A}$           |
| Reference input impedance              |   |      | 100   |                              | k $\Omega$              |
| Reference input capacitance            |   |      | 5     |                              | pF                      |

(2) Temporary overload condition protection. Junction temperature can be exceeded during current limit. Operation above the specified maximum junction temperature may impair device reliability.

(3) Specified by design and characterization. Not tested during production.

(4) Time to exit DAC power-down mode. Measured from  $\overline{\text{CS}}$  rising edge to 90% of DAC final value.



## Electrical Characteristics (continued)

All minimum and maximum specifications at  $V_{DD} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{IO} = 1.7\text{ V to }5.5\text{ V}$ ,  $V_{REFIN} = 1.25\text{ V to }5.5\text{ V}$ ,  $R_{LOAD} = 2\text{ k}\Omega$  to GND,  $C_{LOAD} = 200\text{ pF to GND}$ , digital inputs at  $V_{IO}$  or GND,  $T_A = -40^\circ\text{C to }125^\circ\text{C}$  (unless otherwise noted).

| PARAMETER                              | TEST CONDITIONS                       | MIN   | TYP            | MAX                 | UNIT                         |
|--|---------------------------------------|---|----------------|---------------------|------------------------------|
| <b>INTERNAL REFERENCE</b>              |                                       |   |                |                     |                              |
| Reference output voltage, $V_{REFOUT}$ | $T_A = 25^\circ\text{C}$              | 2.495   | 2.5            | 2.505               | V                            |
| Reference output drift                 | DAC80508                              |   | 2              | 5                   | ppm/ $^\circ\text{C}$        |
|  | DAC70508 and DAC60508                 |   | 5              | 8                   |                              |
| Reference output impedance             |                                       |   | 0.1            |                     | $\Omega$                     |
| Reference output noise                 | 0.1 Hz to 10 Hz                       |   | 15             |                     | $\mu\text{Vpp}$              |
| Reference output noise density         | 10 kHz, $REF_{LOAD} = 10\text{ nF}$   |   | 130            |                     | $\text{nV}/\sqrt{\text{Hz}}$ |
| Reference load current                 |                                       |   | $\pm 5$        |                     | mA                           |
| Reference load regulation              | Source and sink                       |   | 100            |                     | $\mu\text{V}/\text{mA}$      |
| Reference line regulation              |                                       |   | 20             |                     | $\mu\text{V}/\text{V}$       |
| Reference output drift over time       | $T_A = 25^\circ\text{C}$ , 1600 hours |   | 4.8            |                     | ppm                          |
| Reference thermal hysteresis           | DAC80508. First cycle                 |   | 50             |                     | ppm                          |
|  | DAC70508 and DAC60508. First cycle    |   | 190            |                     |                              |
|  | Additional cycle                      |   | 18             |                     |                              |
| <b>DIGITAL INPUTS</b>                  |                                       |   |                |                     |                              |
| $V_{IH}$                               | High-level input voltage              | $0.7 \times V_{IO}$   |                |                     | V                            |
| $V_{IL}$                               | Low-level input voltage               |   |                | $0.3 \times V_{IO}$ | V                            |
|  | Input current                         |   |                | $\pm 2$             | $\mu\text{A}$                |
|  | Input pin capacitance                 |   |                | 2                   | pF                           |
| <b>DIGITAL OUTPUTS: SDO/ALARM</b>      |                                       |   |                |                     |                              |
| $V_{OH}$                               | High-level output voltage             | $I_{LOAD} = 0.2\text{ mA}$  | $V_{IO} - 0.4$ |                     | V                            |
| $V_{OL}$                               | Low-level output voltage              | $I_{LOAD} = -0.2\text{ mA}$   |                |                     | 0.4                          |
|  | Output pin capacitance                |   |                | 4                   | pF                           |
| <b>POWER SUPPLY REQUIREMENTS</b>       |                                       |   |                |                     |                              |
| $I_{DD}$                               | $V_{DD}$ supply current               | Active mode. Internal reference enabled. Gain = 1. DAC code = full scale. Outputs unloaded. SPI static  | 5              | 6                   | mA                           |
|  |                                       | Active mode. Internal reference disabled. Gain = 1. DAC code = full scale. Outputs unloaded. SPI static | 4.5            | 5.5                 |                              |
|  |                                       | Power-down  | 15             |                     | $\mu\text{A}$                |
| $I_{IO}$                               | $V_{IO}$ supply current               |   |                | 2                   | $\mu\text{A}$                |

## 7.6 Typical Characteristics

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

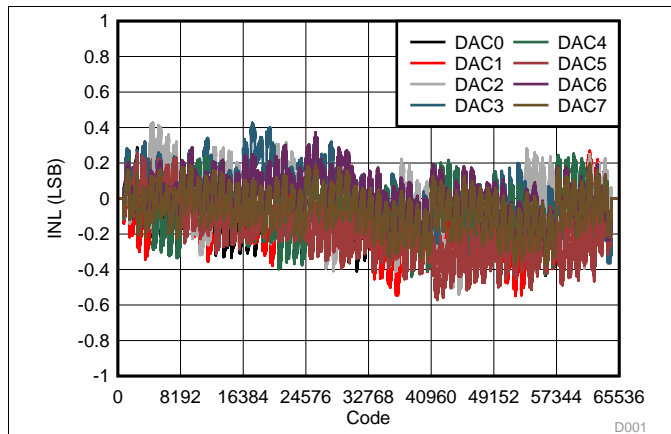


Figure 1. Integral Linearity Error vs Digital Input Code

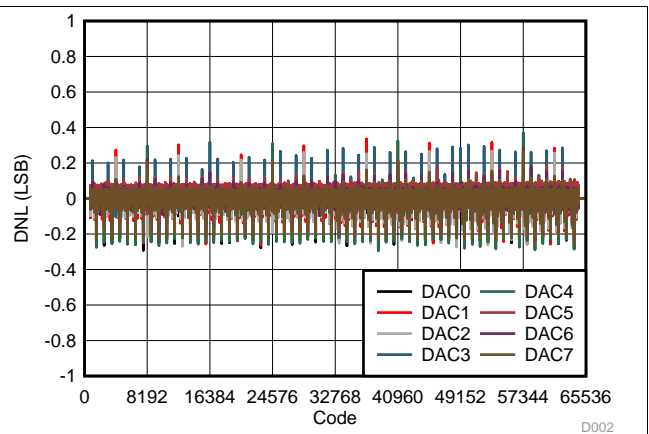


Figure 2. Differential Linearity Error vs Digital Input Code

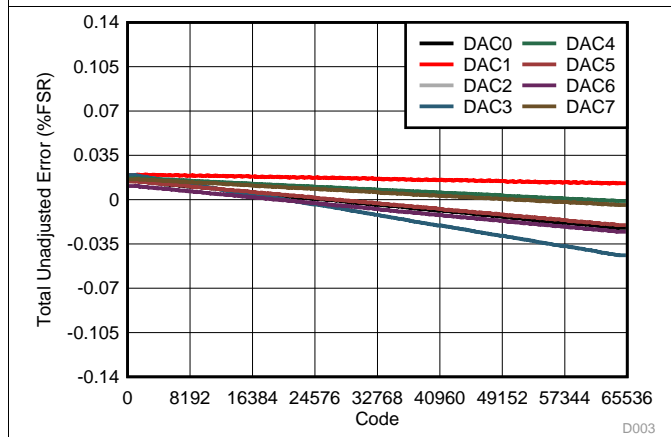


Figure 3. Total Unadjusted Error vs Digital Input Code

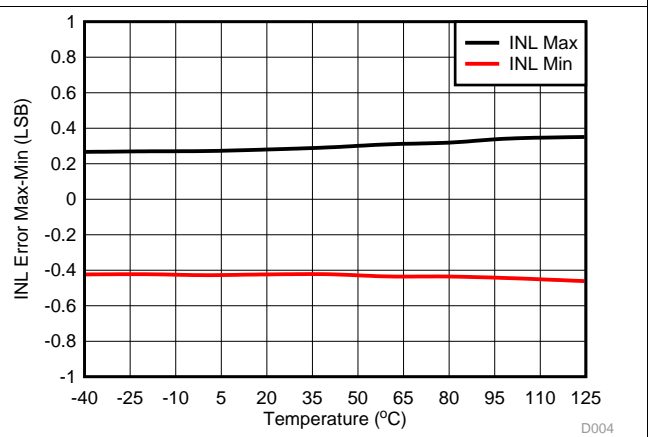


Figure 4. Integral Linearity Error vs Temperature

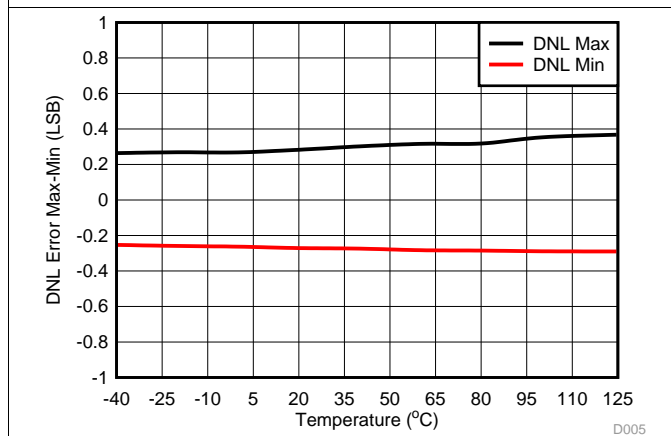


Figure 5. Differential Linearity Error vs Temperature

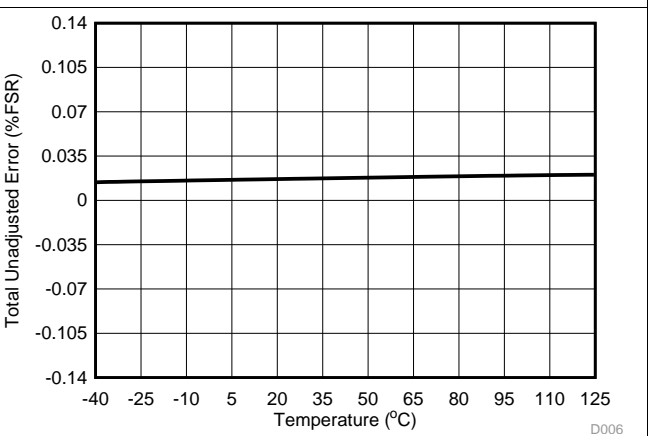


Figure 6. Total Unadjusted Error vs Temperature

Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

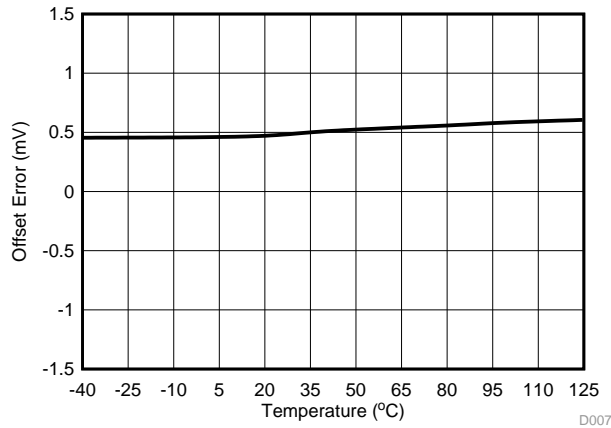


Figure 7. Offset Error vs Temperature

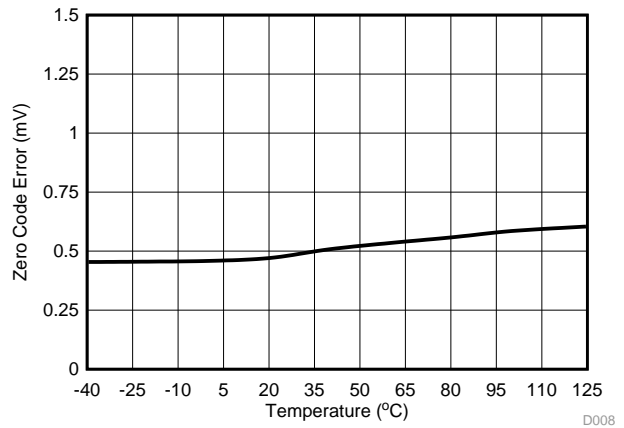


Figure 8. Zero Code Error vs Temperature

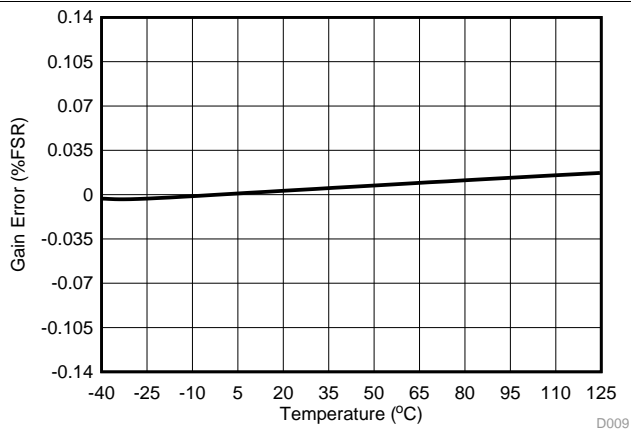


Figure 9. Gain Error vs Temperature



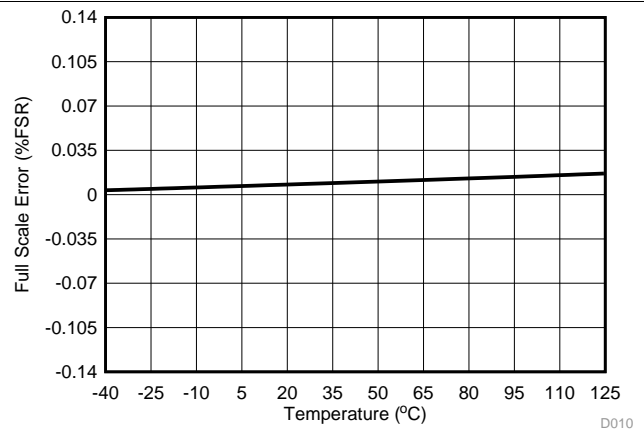


Figure 10. Full Scale Error vs Temperature

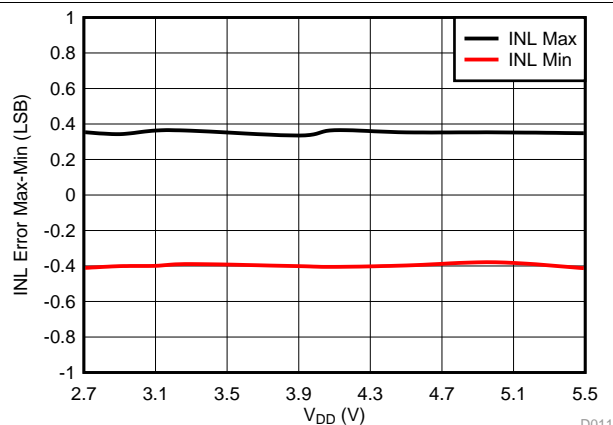

Gain = 1

Figure 11. Integral Linearity Error vs Supply Voltage

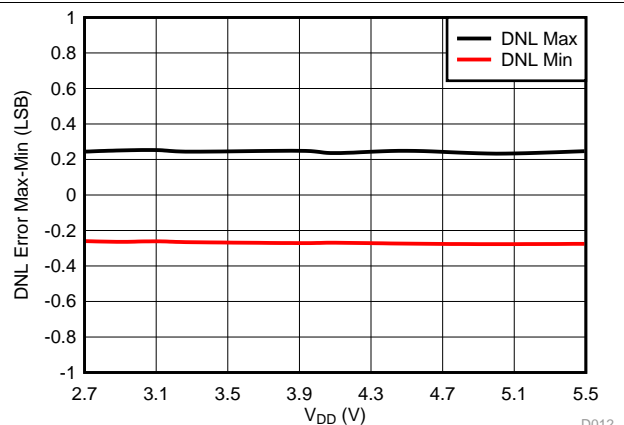


Gain = 1

Figure 12. Differential Linearity Error vs Supply Voltage

### Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

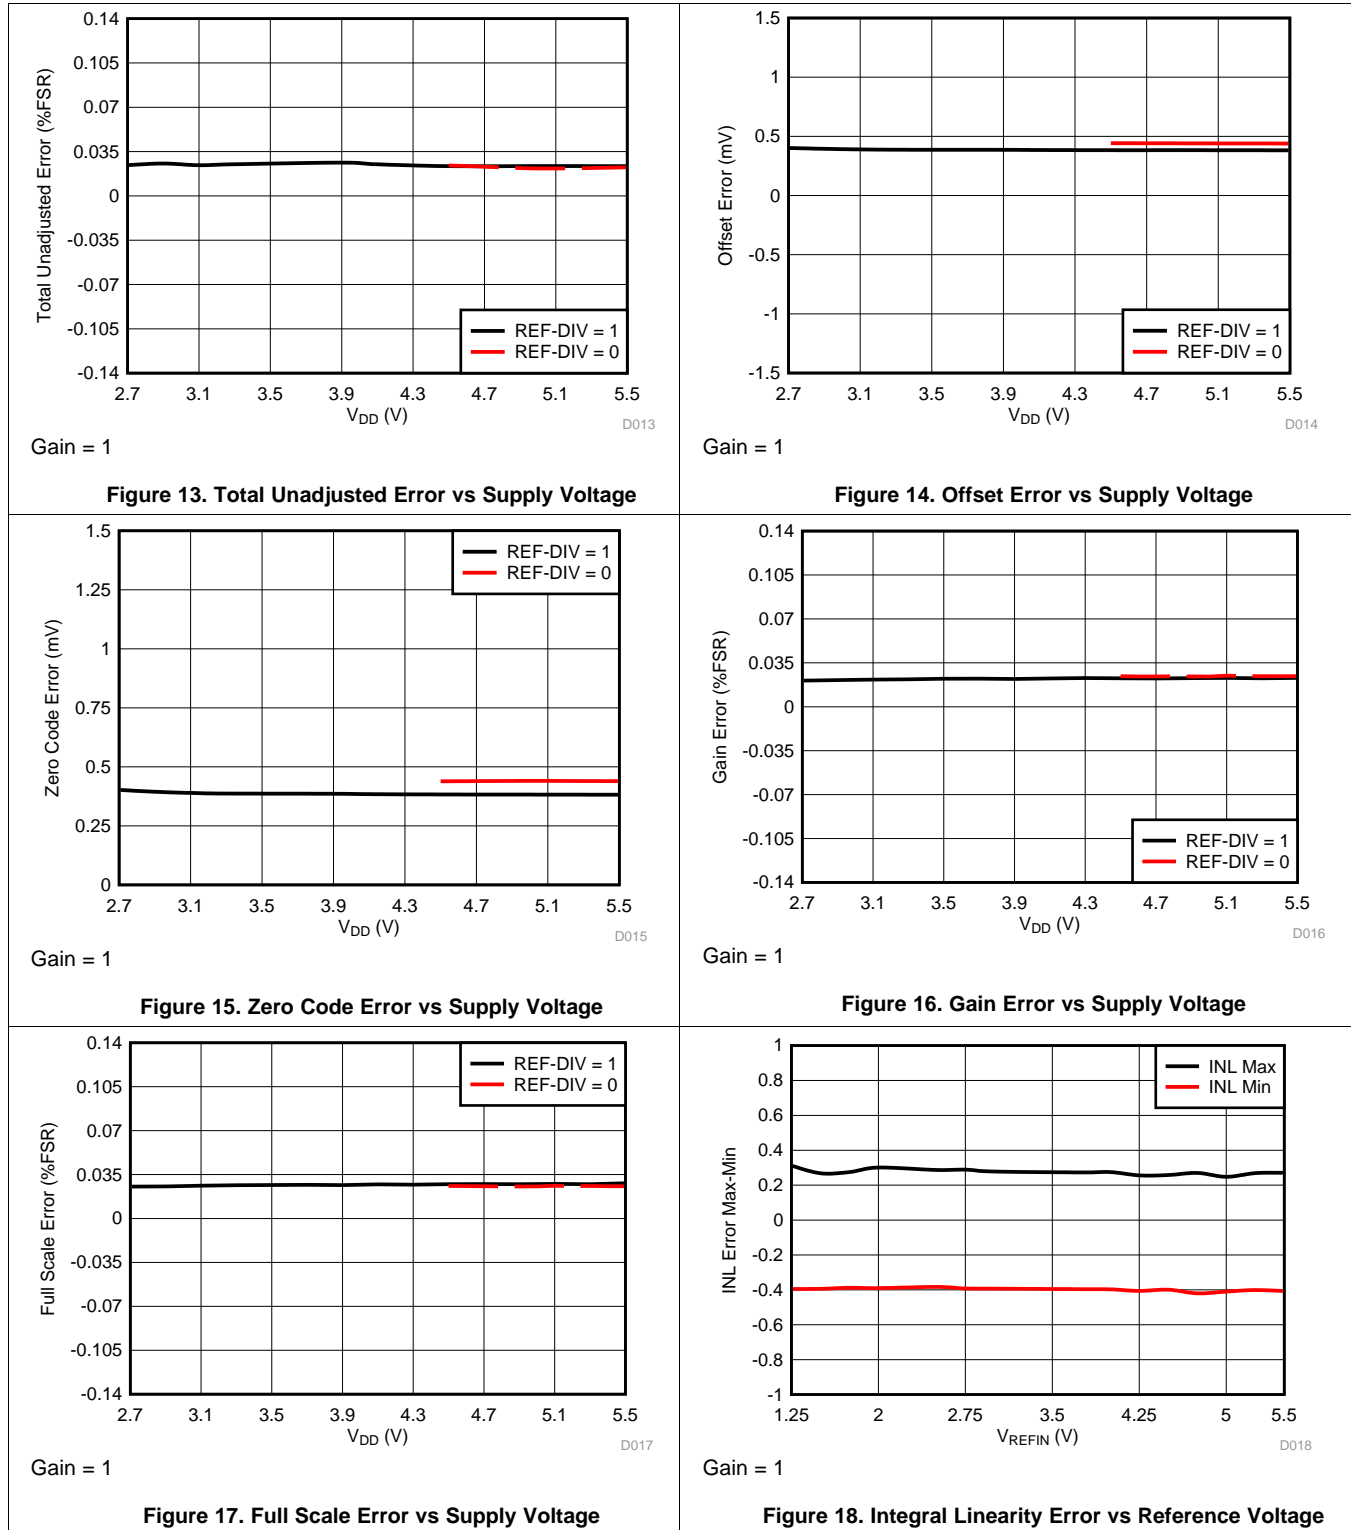

Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

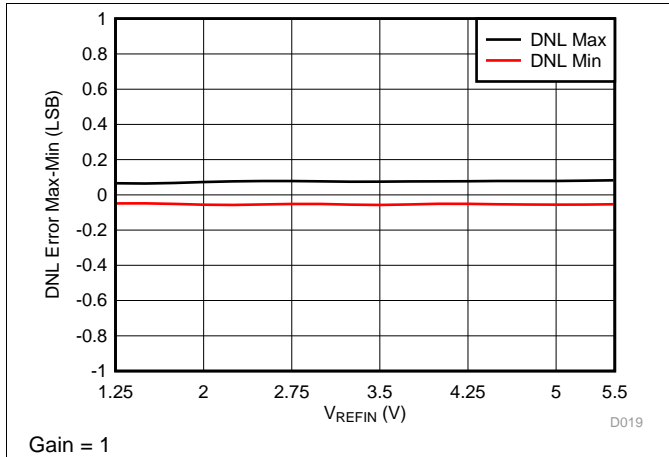


Figure 19. Differential Linearity Error vs Reference Voltage

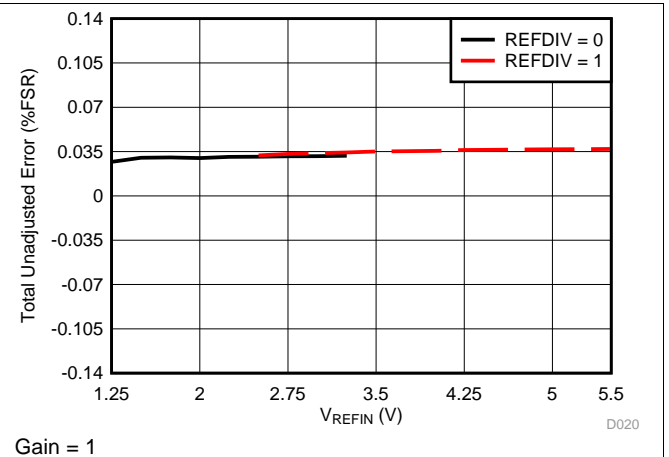


Figure 20. Total Unadjusted Error vs Reference Voltage

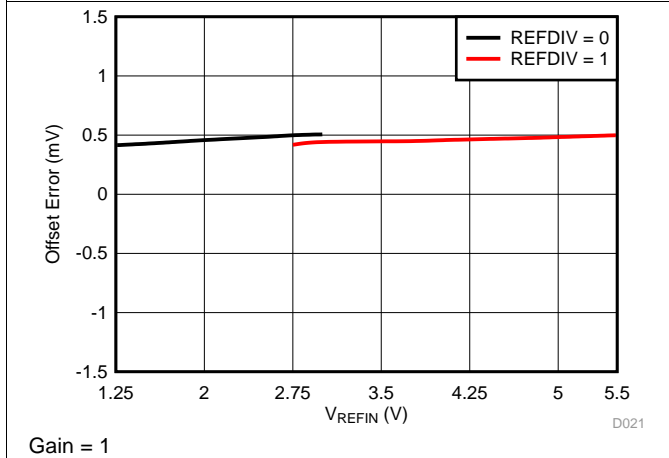


Figure 21. Offset Error vs Reference Voltage

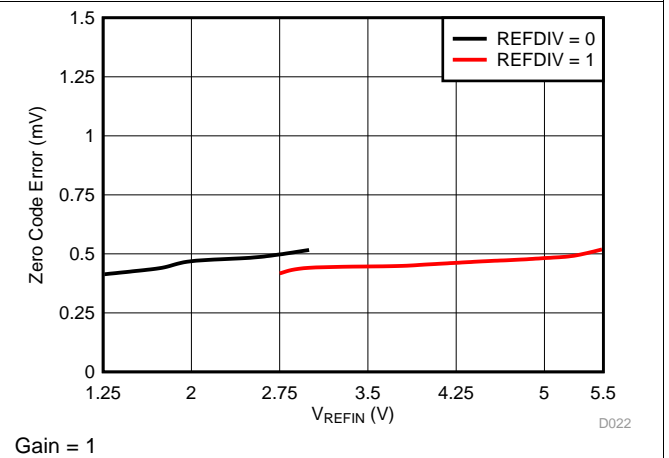


Figure 22. Zero Code Error vs Reference Voltage

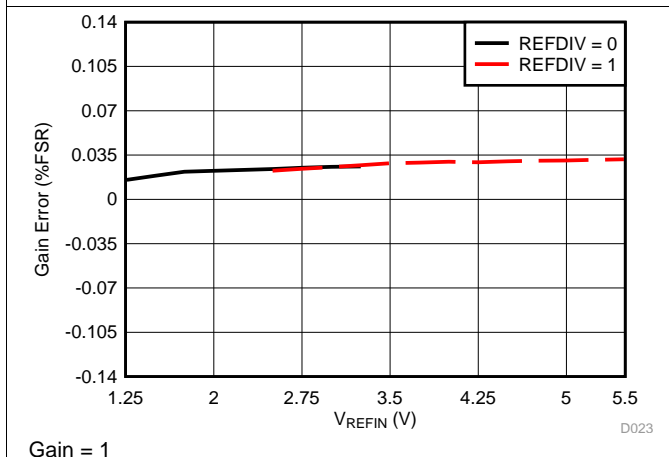


Figure 23. Gain Error vs Reference Voltage







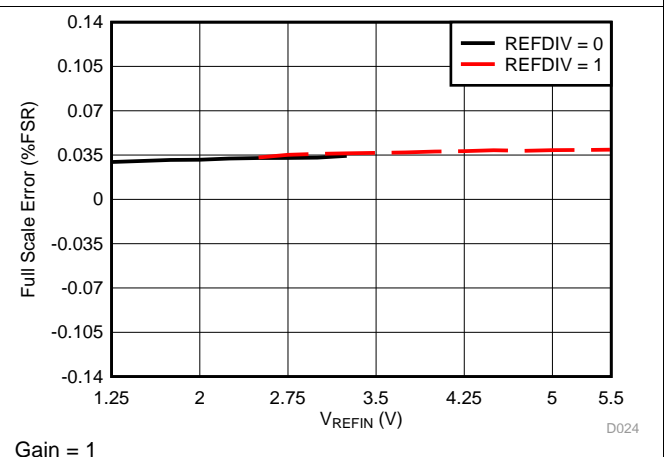


Figure 24. Full Scale Error vs Reference Voltage







### Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

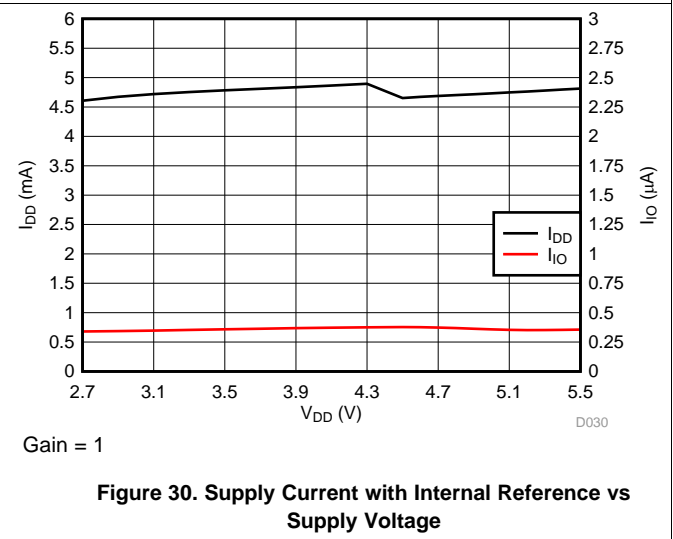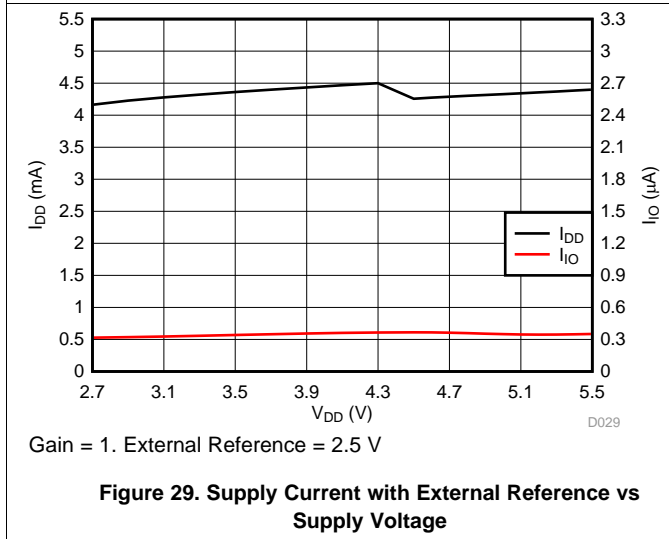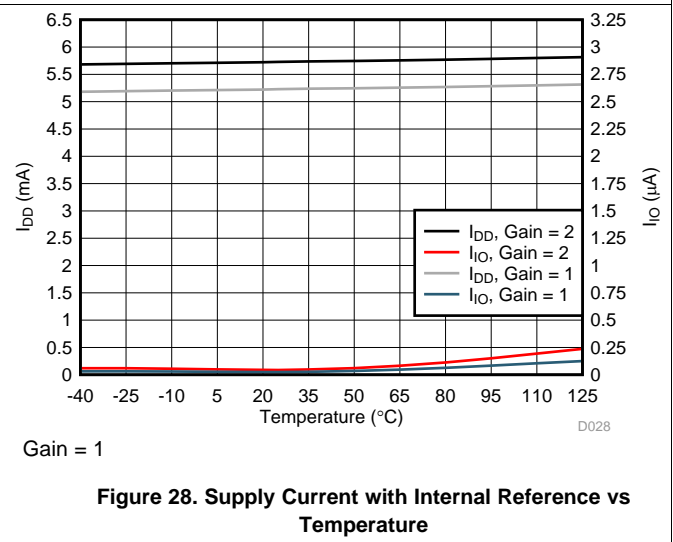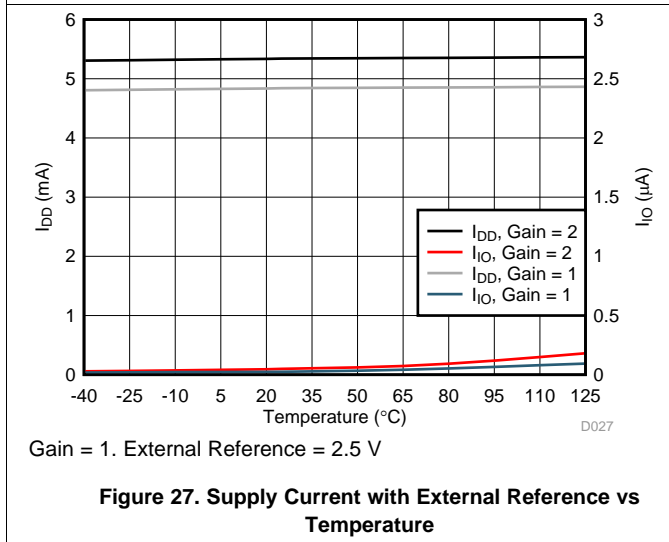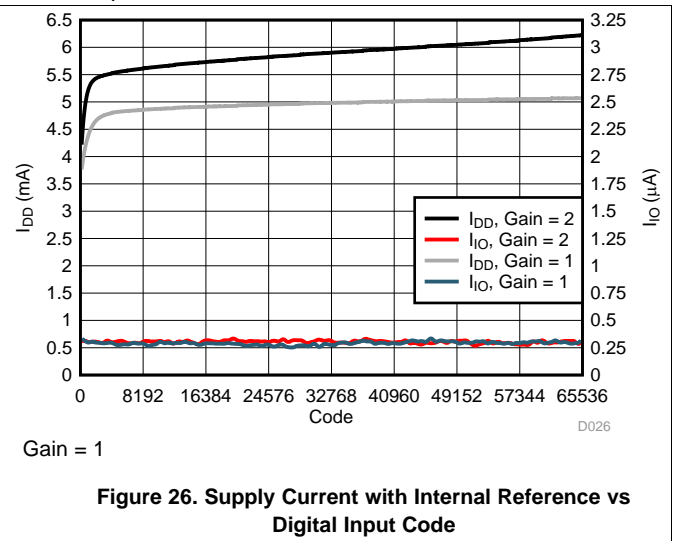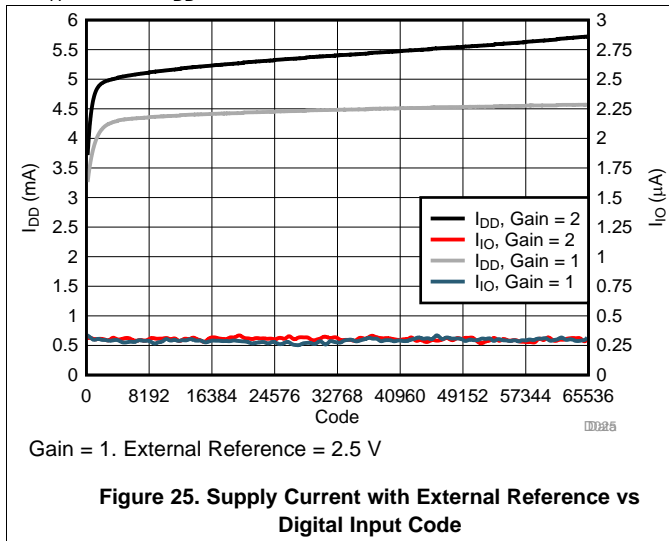


Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

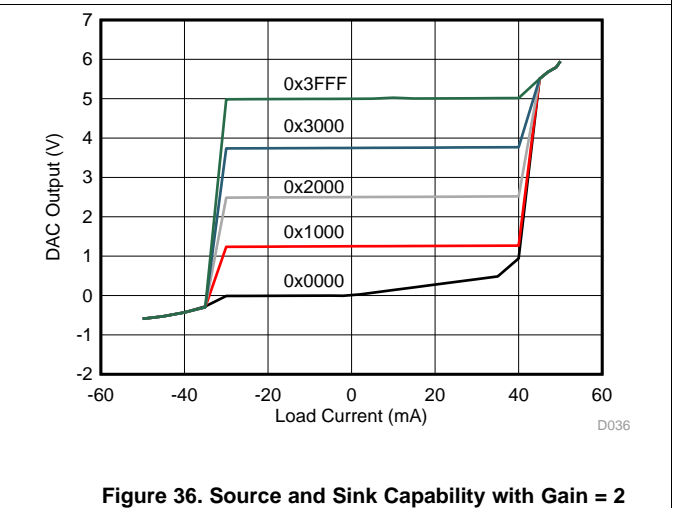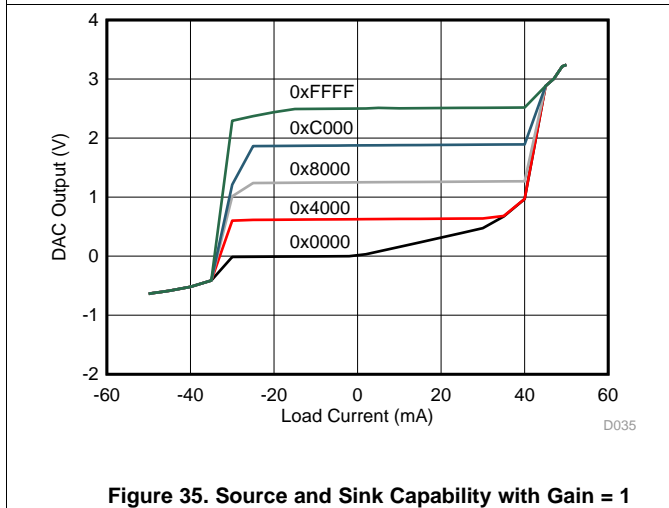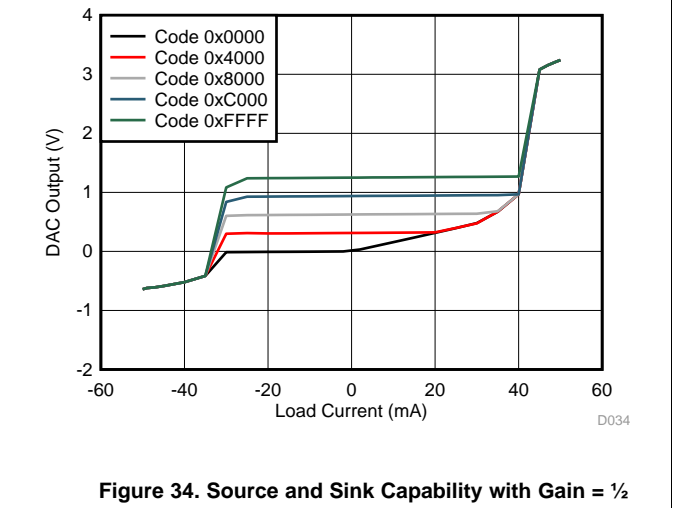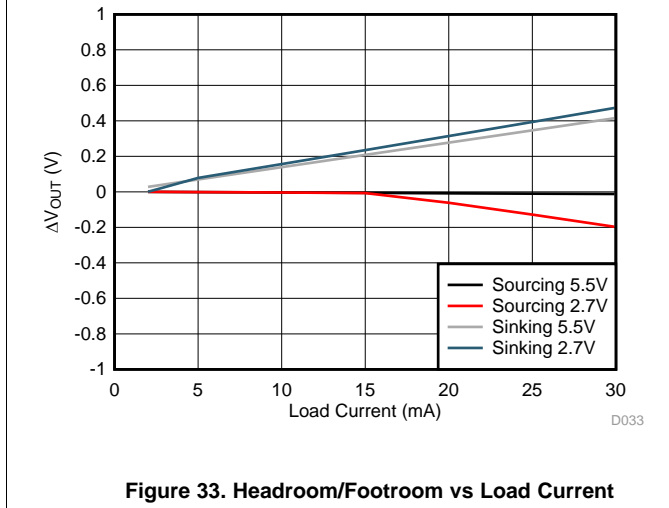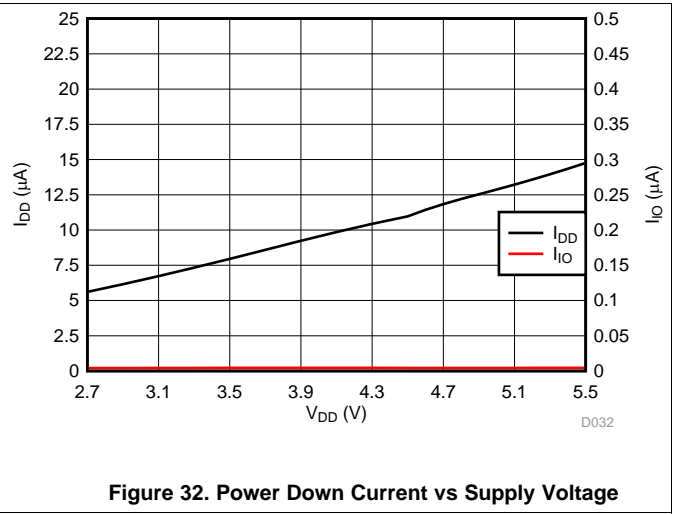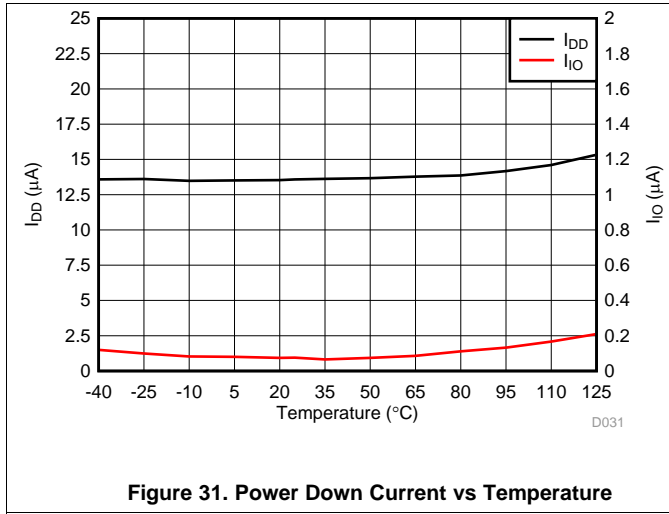


**Typical Characteristics (continued)**

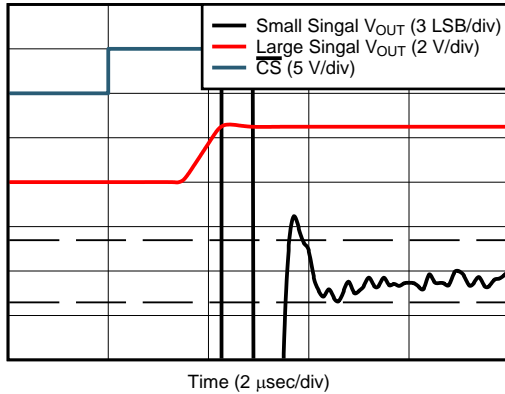 At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.


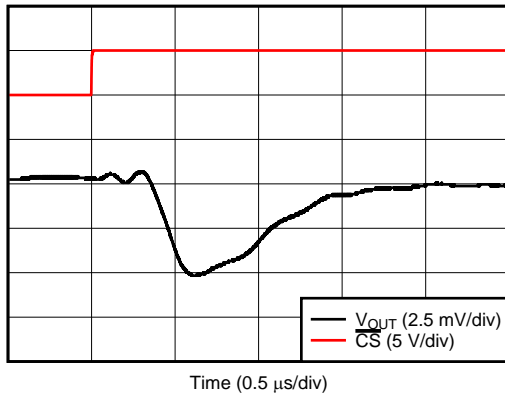
Gain = 1

D037

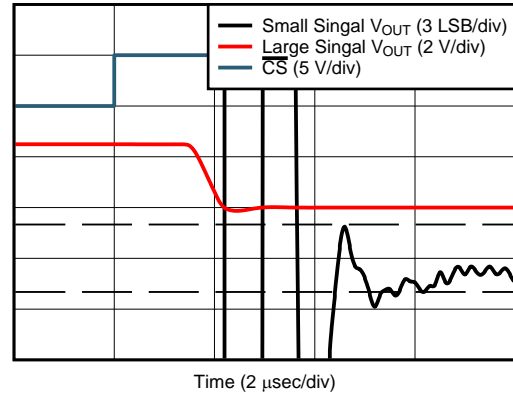**Figure 37. Full-Scale Settling Time, Rising Edge**


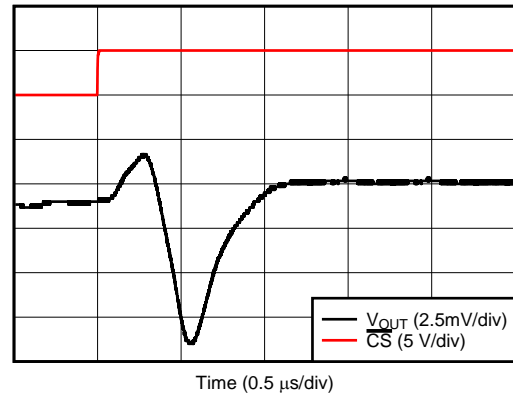
Gain = 1

D038

**Figure 38. Full-Scale Settling Time, Falling Edge**


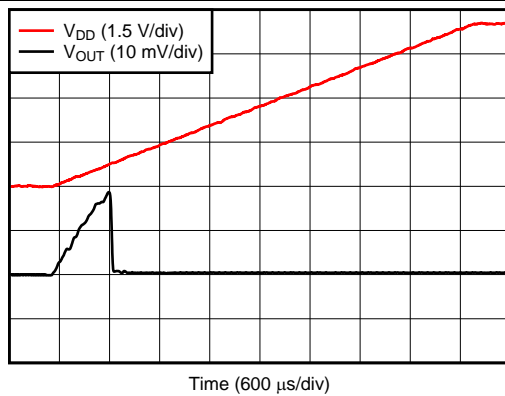
Gain = 1

D039

**Figure 39. Glitch Impulse, Falling Edge, 1 LSB Step**


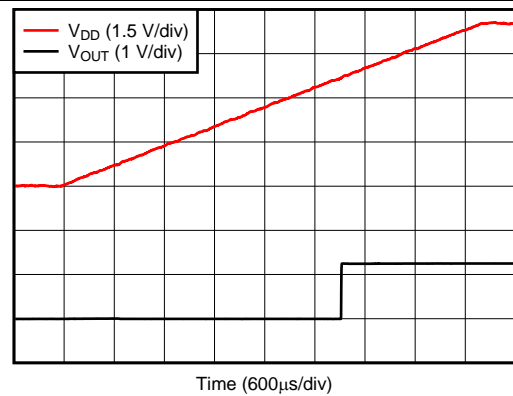
Gain = 1

D040

**Figure 40. Glitch Impulse, Rising Edge, 1 LSB Step**


Gain = 1

D041

**Figure 41. Power-On, Reset to Zero Scale**


Gain = 1


D042

**Figure 42. Power-On, Reset to Midscale**



Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

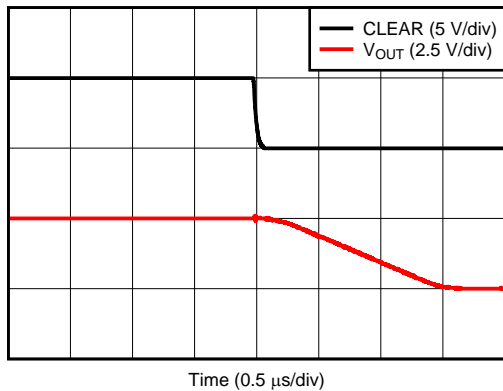


Time (0.5 μs/div)

D059

Gain = 1

Figure 43. DACx0508C, Clear to Zero Scale

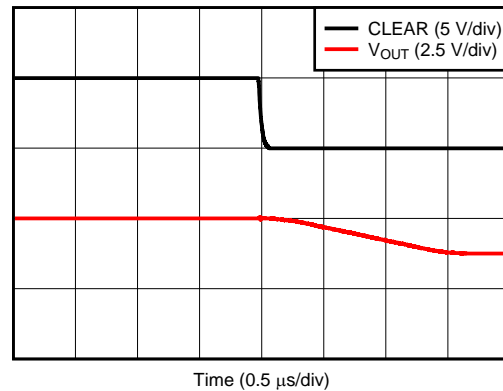


Time (0.5 μs/div)

D060

Gain = 1

Figure 44. DACx0508C, Clear to Midscale

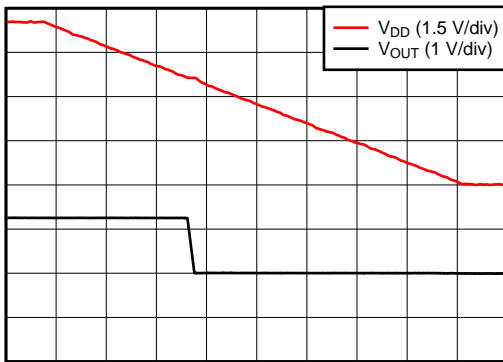


Time (600 μs/div)

D044

Gain = 1. DAC code at midscale

Figure 45.  $V_{DD}$  Power-Down

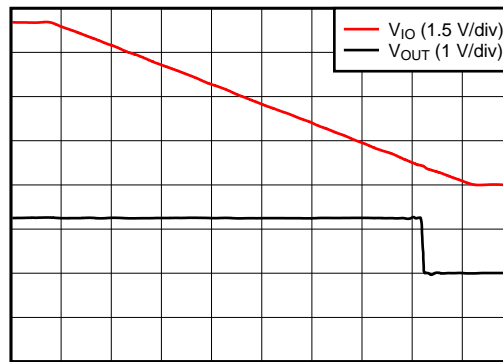


Time (600 μs/div)

D060

Gain = 1. DAC code at midscale

Figure 46.  $V_{IO}$  Power-Down

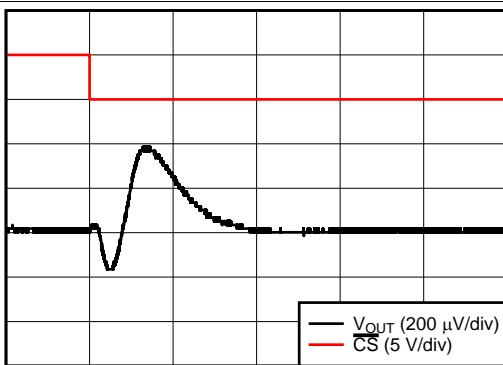


Time (2 μsec/div)

D045

Gain = 1. Measured DAC at midscale. All other DACs switch from code 32 to full scale

Figure 47. Channel to Channel Crosstalk

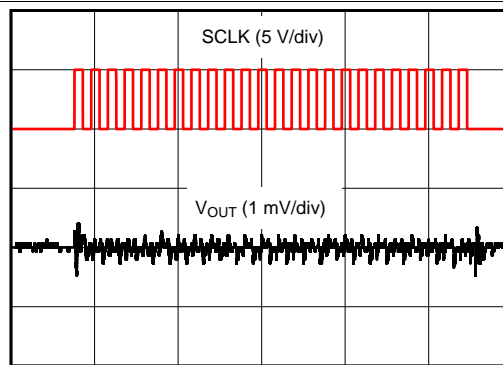

Time (5 μsec/div)

D046

Gain = 1. DAC code at midscale

Figure 48. Clock Feedthrough with SCLK = 1 MHz

Typical Characteristics (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

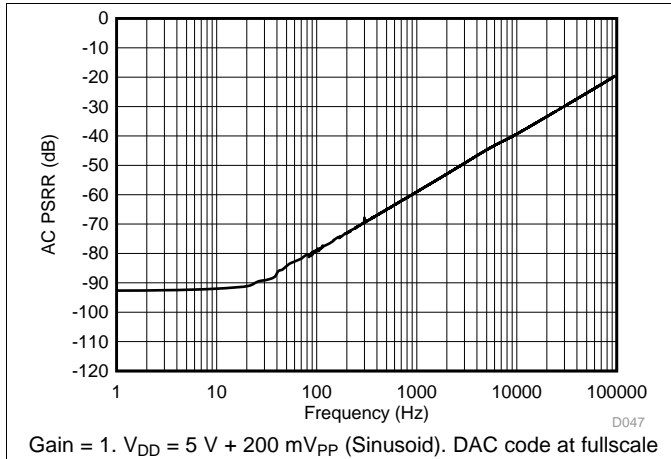


Figure 49. DAC Output AC PSRR vs Frequency

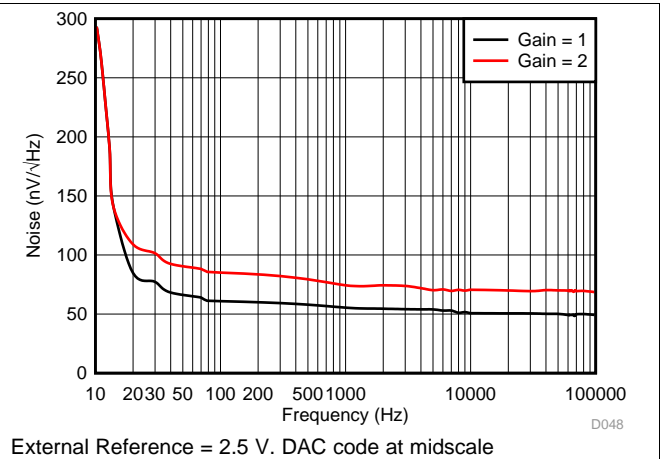


Figure 50. DAC Output Noise Density vs Frequency

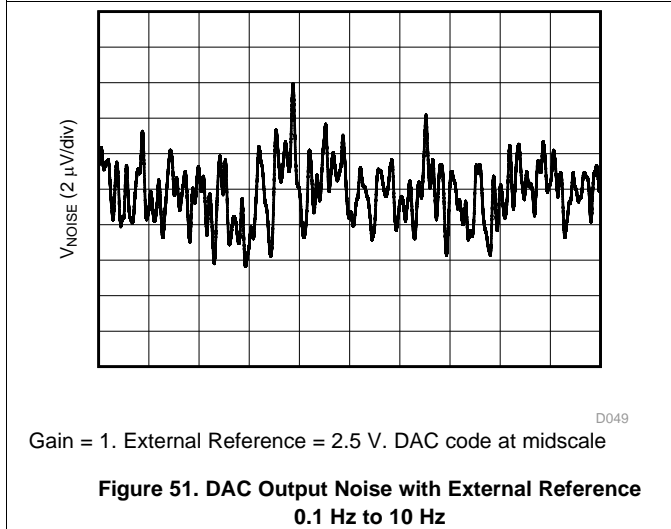


Figure 51. DAC Output Noise with External Reference 0.1 Hz to 10 Hz

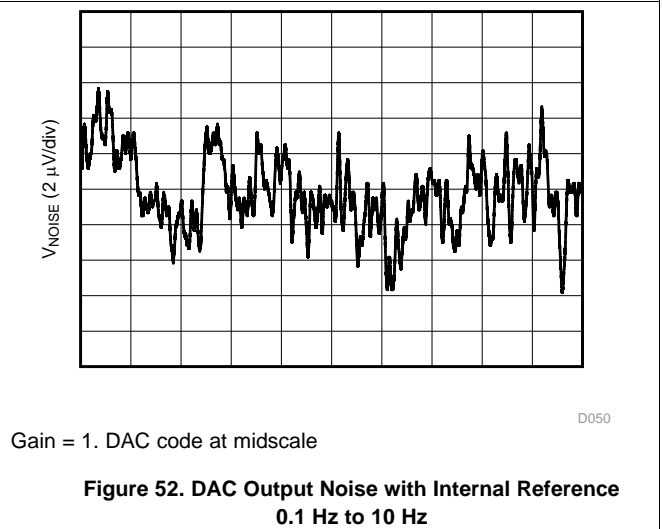


Figure 52. DAC Output Noise with Internal Reference 0.1 Hz to 10 Hz

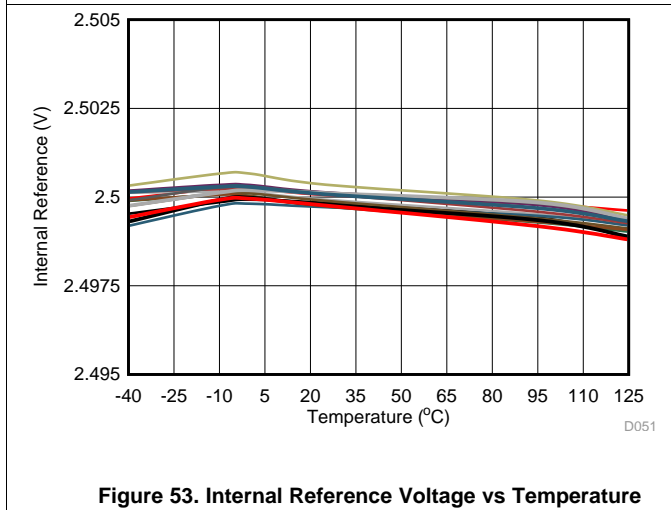


Figure 53. Internal Reference Voltage vs Temperature


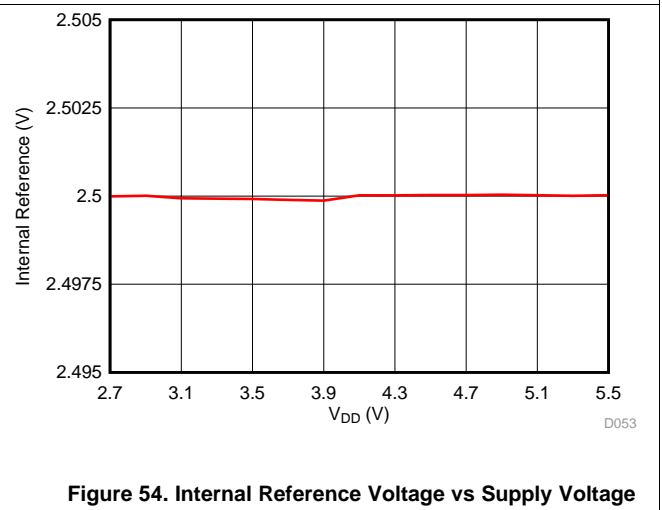



Figure 54. Internal Reference Voltage vs Supply Voltage

**Typical Characteristics (continued)**


At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , Internal Reference = 2.5 V, Gain = 2, DAC outputs unloaded, unless otherwise noted.

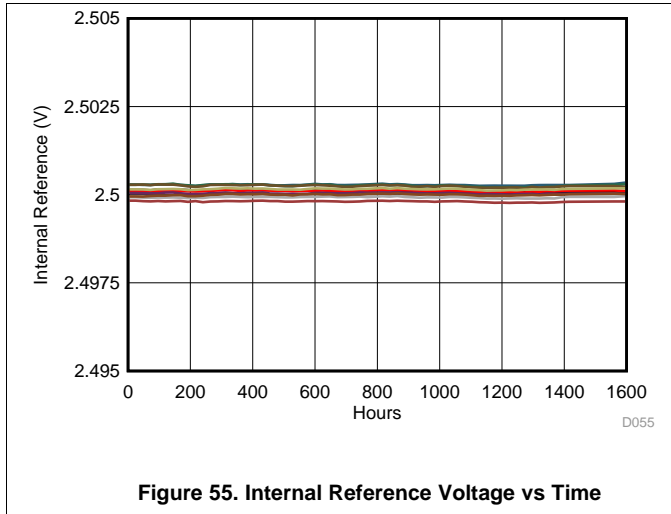


**Figure 55. Internal Reference Voltage vs Time**

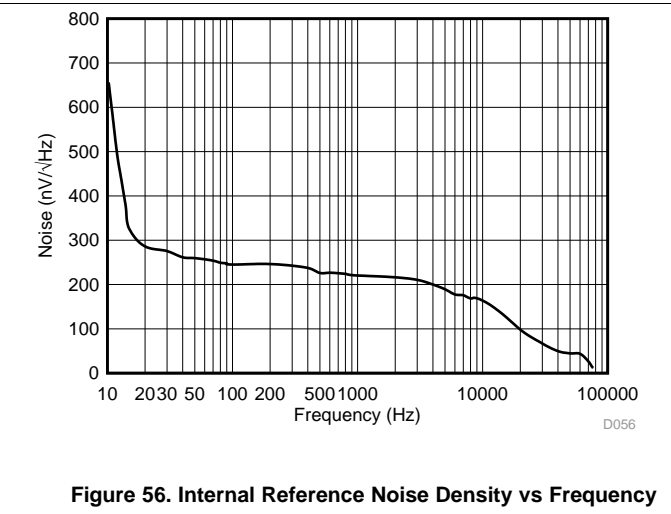

**Figure 56. Internal Reference Noise Density vs Frequency**

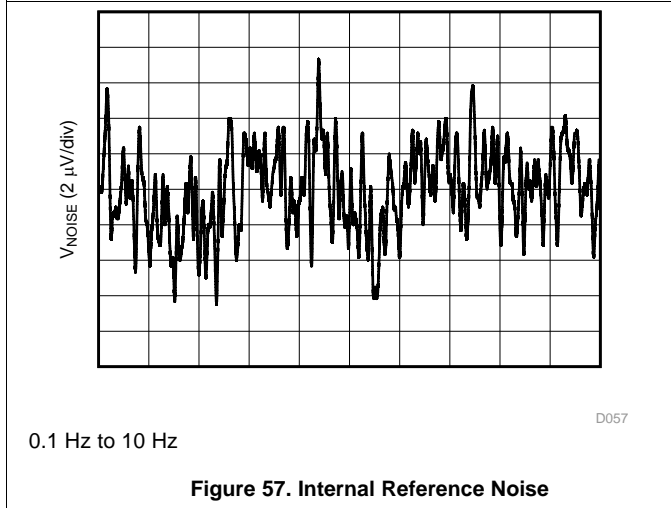

**Figure 57. Internal Reference Noise**

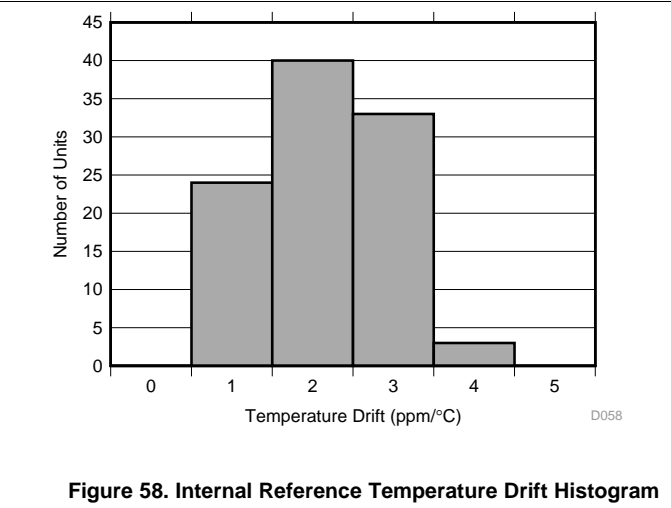

**Figure 58. Internal Reference Temperature Drift Histogram**

## 8 Detailed Description

### 8.1 Overview


The DACx0508 is a pin-compatible family of low-power, eight-channel, buffered voltage-output digital-to-analog converters (DACs) with 16-, 14- and 12-bit resolution. The DACx0508 includes a 2.5 V internal reference and user selectable gain configuration providing full scale output voltages of 1.25 V (gain = ½), 2.5 V (gain = 1) or 5 V (gain = 2). The device operates from a single 2.7 V to 5.5 V supply, is specified monotonic, and provides high linearity of ±1 LSB INL.

Communication to the DACx0508 is performed through a serial interface that supports stand-alone and daisy-chain operation. The optional frame-error checking provides added robustness to the DACx0508 serial interface.

The DACx0508 incorporates a power-on-reset circuit that powers up and maintains the DAC outputs at either zero scale or midscale until a valid code is written to the device.

A dedicated clear pin (DACx0508C) enables a simultaneous update of multiple DAC channels to their power-on-reset value.

### 8.2 Functional Block Diagram

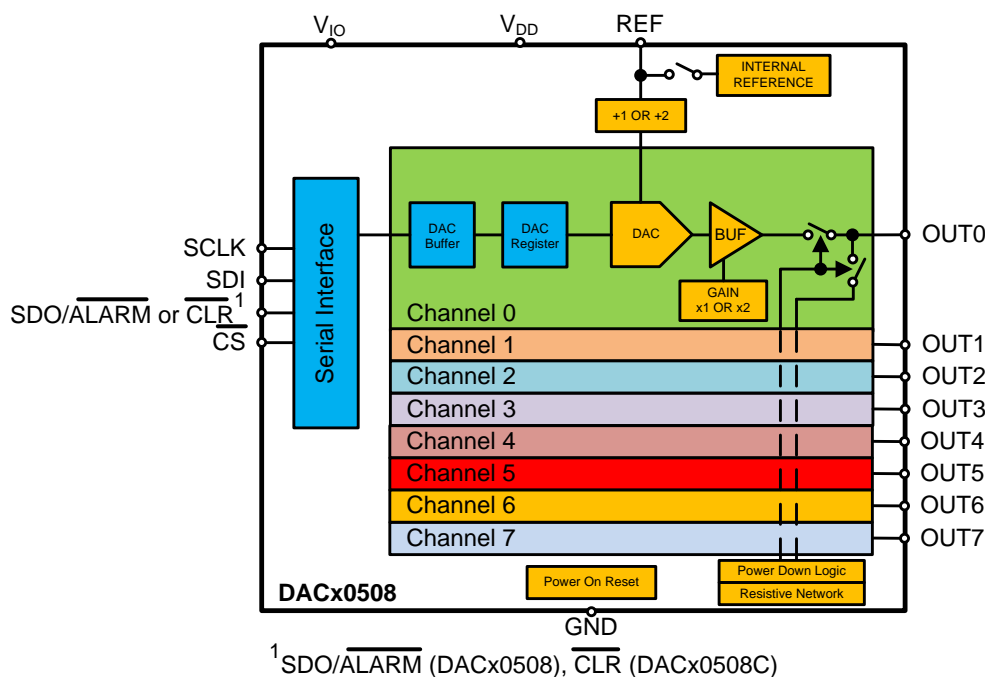

## 8.3 Feature Description

### 8.3.1 Digital-to-Analog Converter (DAC) Architecture

Each output channel in the DACx0508 consists of an R-2R ladder architecture followed by an output buffer amplifier. Figure 59 shows a block diagram of the DAC architecture.

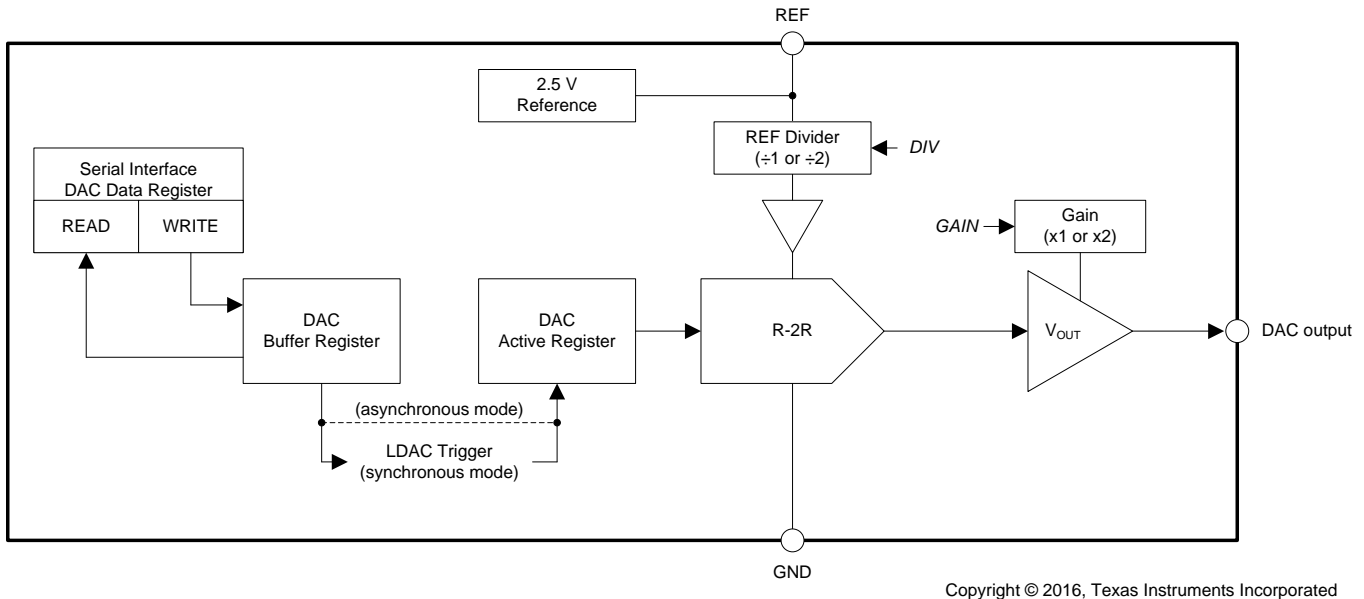


Figure 59. DACx0508 DAC Block Diagram

#### 8.3.1.1 DAC Transfer Function

The input data are written to the individual DAC Data registers in straight binary format. After a power-on or a reset event, all DAC registers are set to either zero code (DACx0508Z) or midscale code (DACx0508M). The DAC transfer function is given by Equation 1.

$$V_{OUT} = \frac{CODE}{2^n} \times \frac{V_{REF}}{DIV} \times GAIN \quad (1)$$

where:

CODE = decimal equivalent of the binary code that is loaded to the DAC register. CODE ranges from 0 to  $2^n - 1$ .

$V_{REF}$  = DAC reference voltage. Either  $V_{REFOUT}$  from the internal 2.5 V reference or  $V_{REFIN}$  if using an external one.

n = resolution in bits. Either 12 (DAC60508), 14 (DAC70508) or 16 (DAC80508).

DIV = 1 or 2 as set by the REF-DIV bit in the GAIN register. Set to 1 by default.

GAIN = 1 or 2 as set by the BUFF-GAIN bit for that DAC channel in the GAIN register. Set to 1 by default in DACx0508Z and to 2 in DACx0508M.

## Feature Description (continued)

### 8.3.1.2 Output Amplifiers

The DACx0508 output buffer amplifier is capable of generating rail-to-rail voltages on its output, giving a maximum output range of 0 V to  $V_{DD}$ . Each buffer amplifier is capable of driving a load of 2 k $\Omega$  in parallel with 10 nF to GND.

The full-scale output voltage for each channel is determined by the reference voltage ( $V_{REF}$ ), the reference divider setting (DIV), and the output buffer gain for that channel (GAIN), as shown in Table 1. During normal operation the DIV and GAIN settings can be reconfigured through the REF-DIV and BUFF-GAIN bit (See Equation 1). The GAIN setting for each output channel can be individually configured thus enabling independent output voltage ranges for each DAC output.

**Table 1. DAC Output Range Configuration**

| DIV Setting | GAIN Setting | DAC OUTPUT RANGE                    |
|-------------|--------------|-------------------------------------|
| $\div 2$    | $\times 1$   | 0 V to $\frac{1}{2} \times V_{REF}$ |
| $\div 1$    | $\times 1$   | Not recommended                     |
| $\div 2$    | $\times 2$   | 0 V to $V_{REF}$                    |
| $\div 1$    | $\times 2$   | 0 V to $2 \times V_{REF}$           |

### 8.3.1.3 DAC Register Structure

Data written to the DAC data registers is initially stored in the DAC buffer registers. Transfer of data from the DAC buffer registers to the active DAC registers can be configured to happen immediately (asynchronous mode) or initiated by an LDAC trigger (synchronous mode). Once the DAC active registers are updated, the DAC outputs change to their new values. When the host reads from a DAC Data register, the value held in the DAC buffer register is returned (not the value held in the DAC active register).

#### 8.3.1.3.1 DAC Register Synchronous and Asynchronous Updates

The update mode for each DAC channel is determined by the status of its corresponding SYNC-EN bit. In asynchronous mode, a write to the DAC data register results in an immediate update of the DAC active register and DAC output on  $\overline{CS}$  rising edge. In synchronous mode, writing to the DAC data register does not automatically update the DAC output. Instead the update occurs only after an LDAC trigger event. An LDAC trigger is generated through the LDAC bit in the TRIGGER register. The synchronous update mode enables simultaneous update of multiple DAC outputs. In both update modes a minimum wait time of 1  $\mu$ s is required between DAC output updates.

#### 8.3.1.3.2 Broadcast DAC Register

The DAC broadcast register enables a simultaneous update of multiple DAC outputs with the same value with a single register write. Each DAC channel can be configured to update or remain unaffected by a broadcast command by setting the corresponding DAC-BROADCAST-EN bit in the SYNC register. A register write to the BRDCAST-DATA register forces those DAC channels that have been configured for broadcast operation to update their outputs. The DAC outputs update to the broadcast value on  $\overline{CS}$  rising edge independently of their synchronous mode configuration.

#### 8.3.1.3.3 CLEAR Operation (DACx0508C only)

The  $\overline{CLR}$  pin enables a simultaneous update of multiple DAC channels to the clear value: zero code (DACx0508ZC) or midscale code (DACx0508MC). DAC channels 0 through 3 and channels 4 through 7 can be independently configured to update or remain unaffected by the  $\overline{CLR}$  pin by setting the corresponding CLR-MSK bit. A  $\overline{CLR}$  pin logic low forces those DAC channels that have been configured for clear operation to clear the contents of their buffer and active registers to the clear value and sets the analog outputs accordingly, regardless of their synchronization setting. Those channels not configured for clear operation retain their buffer and active register contents as well as the corresponding analog outputs even if a clear command is issued. While the  $\overline{CLR}$  pin is kept low, register writes to the DAC data registers of those channels set for clear operation are ignored. A logic high on the  $\overline{CLR}$  pin causes the device to exit clear mode.

### 8.3.2 Internal Reference

The DACx0508 includes a 2.5 V precision bandgap reference enabled by default. Operation from an external reference is supported by disabling the internal reference in the CONFIG register. The internal reference is externally available at the REF pin.

A minimum 150 nF capacitor is recommended between the reference output and GND for noise filtering.

#### 8.3.2.1 Reference Divider

The reference voltage to the device, either from the internal reference or an external one can be divided by a factor of two by setting the REF-DIV bit in the GAIN register to 1 during normal operation. The reference voltage divider provides additional flexibility in setting the full-scale output voltage for each DAC output and must be configured so that there is sufficient headroom from  $V_{DD}$  to the DAC operating reference voltage ( $V_{REF/DIV}$ ). See the [Recommended Operating Conditions](#) table for more information.

Improper configuration of the reference divider issues a reference alarm condition. In this case, the reference buffer is shut down, and all the DAC outputs go to 0 V. The DAC data registers are unaffected by the alarm condition thus enabling the DAC output to return to normal operation once the reference divider is configured correctly. The reference alarm status can be read from the REF-ALM bit in the STATUS register. Additionally by setting ALM-EN = 1 and ALM-SEL = 1 in the CONFIG register, the SDO/ALARM pin is configured as a reference alarm pin.

#### 8.3.2.2 Solder Heat Reflow

A known behavior of IC reference voltage circuits is the shift induced by the soldering process. [Figure 60](#) and [Figure 61](#) show the effect of solder heat reflow for the DACx0508 internal reference.

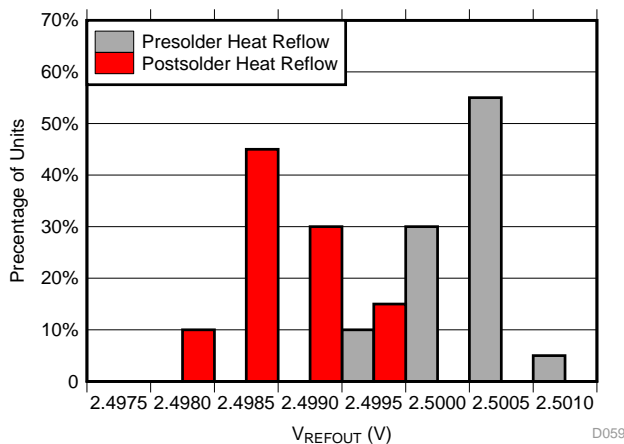


Figure 60. DAC70508 and DAC60508 Solder Heat Reflow Reference Voltage Shift

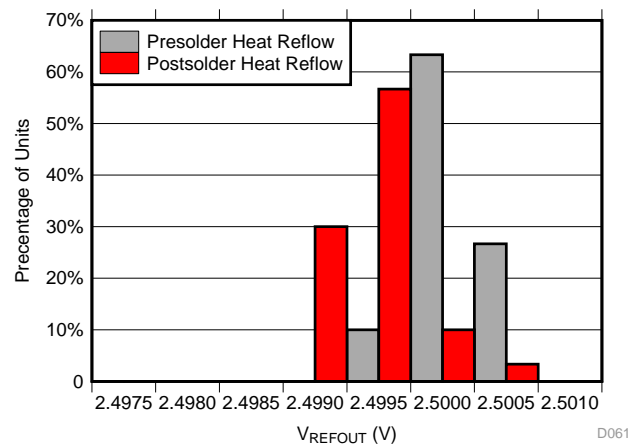



Figure 61. DAC80508 Solder Heat Reflow Reference Voltage Shift

### 8.3.3 Device Reset Options


#### 8.3.3.1 Power-on-Reset (POR)

The DACx0508 includes a power-on reset function that controls the output voltage at power up. After the  $V_{DD}$  and  $V_{IO}$  supplies have been established a POR event is issued. The POR causes all registers to initialize to their default values and communication with the device is valid only after a 250  $\mu$ s power-on-reset delay. The default value for all DACs in the DACx0508Z devices is zero-code and midscale-code for the DACx0508M ones. Each DAC channel remains at the power-up voltage until a valid command is written to it.

The POR circuit requires specific supply levels to discharge the internal capacitors and to reset the device on power up, as indicated in [Figure 62](#) and [Figure 63](#). In order to ensure a POR event,  $V_{DD}$  or  $V_{IO}$  must be below their corresponding low thresholds for at least 100  $\mu$ s. If  $V_{DD}$  and  $V_{IO}$  remain above their specified high threshold a POR event will not occur. When the supplies drop below their high threshold but remain over the lower one (shown as the undefined region), the device may or may not reset under all specified temperature and power-supply conditions.

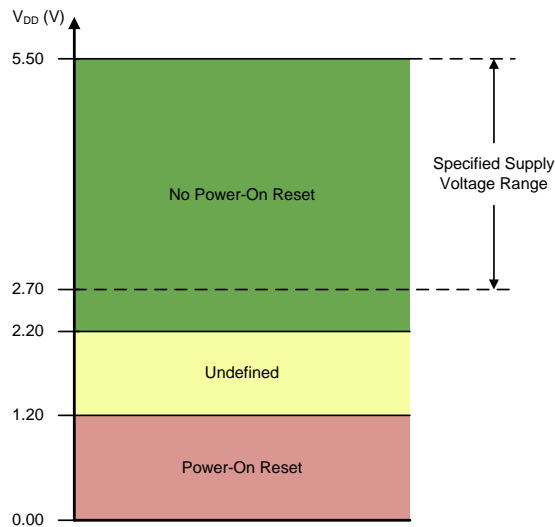

**Figure 62. Threshold Levels for  $V_{DD}$  POR Circuit**

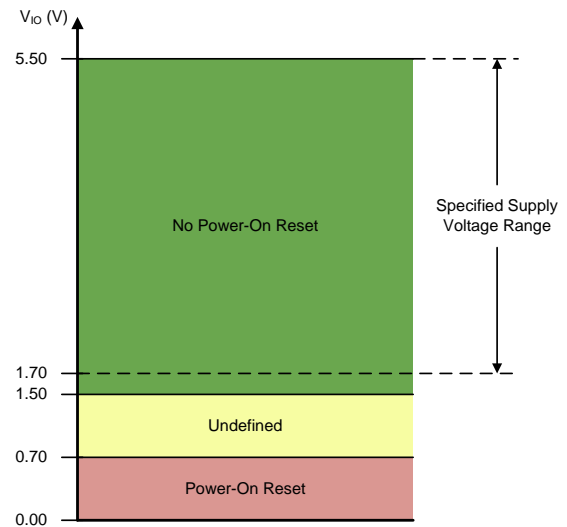

**Figure 63. Threshold Levels for  $V_{IO}$  POR Circuit**

#### 8.3.3.2 Software Reset

A device software reset event is initiated by writing the reserved code 0x1010 to SOFT-RESET in the TRIGGER register. The software reset command is triggered on the  $\overline{CS}$  rising edge of the instruction. A software reset initiates a POR event.



## 8.4 Device Functional Modes

### 8.4.1 Stand-Alone Operation

A serial interface access cycle is initiated by asserting the  $\overline{CS}$  pin low. The serial clock SCLK can be a continuous or gated clock. SDI data are clocked on SCLK falling edges. A regular serial interface access cycle is 24 bits long with error checking disabled and 32 bits long with error checking enabled, thus the  $\overline{CS}$  pin must stay low for at least 24 or 32 SCLK falling edges. The access cycle ends when the  $\overline{CS}$  pin is de-asserted high. If the access cycle contains less than the minimum clock edges, the communication is ignored. If the access cycle contains more than the minimum clock edges, only the last 24 or 32 bits are used by the device. When  $\overline{CS}$  is high, the SCLK and SDI signals are blocked and the SDO pin is in a Hi-Z state.

In an error checking disabled access cycle (24-bits long) the first byte input to SDI is the instruction cycle which identifies the request as a read or write command and the 4-bit address to be accessed. The following bits in the cycle form the data cycle, as shown in [Table 2](#).

**Table 2. Serial Interface Access Cycle**

| BIT   | FIELD    | DESCRIPTION  |
|-------|----------|--|
| 23    | RW       | Identifies the communication as a read or write command to the addressed register. R/W = 0 sets a write operation. R/W = 1 sets a read operation.  |
| 22:20 | Reserved | Reserved bits. Must be filled with zeros.  |
| 19:16 | A[3:0]   | Register address. Specifies the register to be accessed during the read or write operation.  |
| 15:0  | DI[15:0] | Data cycle bits. If a write command, the data cycle bits are the values to be written to the register with address A[3:0]. If a read command, the data cycle bits are don't care values. |

A read operation is initiated by issuing a read command access cycle. After the read command, a second access cycle must be issued to get the requested data, as shown in [Table 3](#). Data are clocked out on SDO pin either on the falling edge or rising edge of SCLK according to the FSDO bit in the CONFIG register.


**Table 3. SDO Output Access Cycle**

| BIT   | FIELD    | DESCRIPTION   |
|-------|----------|---|
| 23    | RW       | Echo RW from previous access cycle.                     |
| 22:20 | Reserved | Echo bits 22:20 from previous access cycle (all zeros). |
| 19:16 | A[3:0]   | Echo address from previous access cycle.                |
| 15:0  | DO[15:0] | Readback data requested on previous access cycle.       |

### 8.4.2 Daisy-Chain Operation

For systems that contain more than one DACx0508 devices, the SDO pin can be used to daisy-chain them together. Daisy-chain operation is useful in reducing the number of serial interface lines.

The first falling edge on the  $\overline{CS}$  pin starts the operation cycle. If more than 24 SCLK pulses are applied while the  $\overline{CS}$  pin is kept low, the data ripples out of the shift register and is clocked out on the SDO pin either on the falling edge or rising edge of SCLK according to the FSDO bit. By connecting the SDO output of the first device to the SDI input of the next device in the chain, a multiple-device interface is constructed. Each device in the system requires 24 clock pulses. As a result the total number of clock cycles must be equal to  $24 \times N$ , where N is the total number of DACx0508 devices in the daisy chain. When the serial transfer to all devices is complete the  $\overline{CS}$  signal is taken high. This action transfers the data from the serial peripheral interface (SPI) shift registers to the internal registers of each device in the daisy chain and prevents any further data from being clocked into the input shift register.

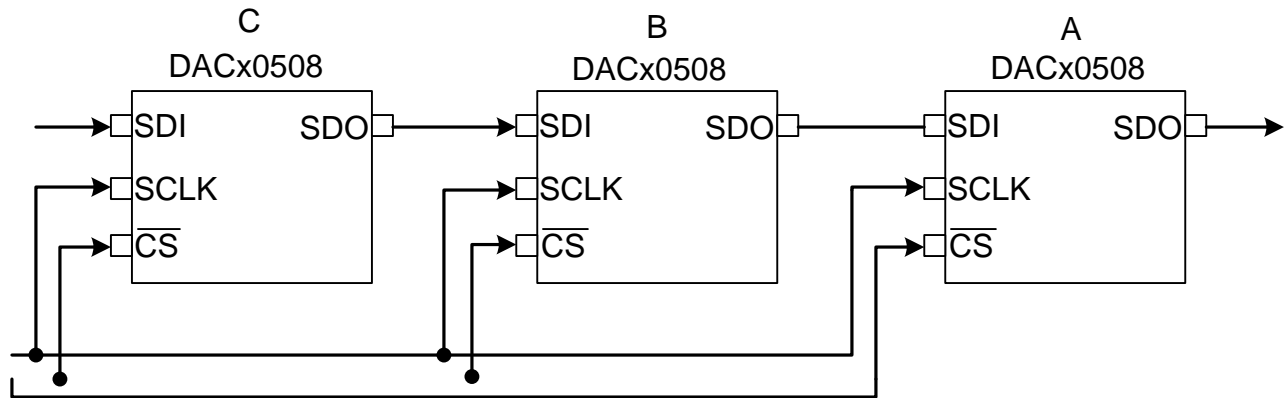

Copyright © 2017, Texas Instruments Incorporated

**Figure 64. Daisy-Chain Layout**

### 8.4.3 Frame Error Checking

If the DACx0508 is used in a noisy environment, error checking can be used to check the integrity of SPI data communication between the device and the host processor. This feature can be enabled by setting the CRC-EN bit in the CONFIG register.

The error checking scheme is based on the CRC-8-ATM (HEC) polynomial  $x^8 + x^2 + x + 1$  (that is, 100000111). When error checking is enabled, the serial interface access cycle width is 32 bits. The normal 24-bit SPI data is appended with an 8-bit CRC polynomial by the host processor before feeding it to the device, as shown in [Table 4](#). In all serial interface readback operations the CRC polynomial is output on the SDO pin as part of the 32-bit cycle.

**Table 4. Error Checking Serial Interface Access Cycle**

| BIT   | FIELD     | DESCRIPTION  |
|-------|-----------|--|
| 31    | RW        | Identifies the communication as a read or write command to the addressed register. R/W = 0 sets a write operation. R/W = 1 sets a read operation.  |
| 30    | CRC-ERROR | Reserved bit. Set to zero.   |
| 29:28 | Reserved  | Reserved bits. Must be filled with zeros.  |
| 27:24 | A[3:0]    | Register address. Specifies the register to be accessed during the read or write operation.  |
| 23:8  | DI[15:0]  | Data cycle bits. If a write command, the data cycle bits are the values to be written to the register with address A[3:0]. If a read command, the data cycle bits are don't care values. |
| 7:0   | CRC       | 8-bit CRC polynomial.  |

The DACx0508 decodes the 32-bit access cycle to compute the CRC remainder on  $\overline{CS}$  rising edges. If no error exists, the CRC remainder is zero and data are accepted by the device.

A write operation failing the CRC check causes the data to be ignored by the device. After the write command, a second access cycle can be issued to determine the error checking result (CRC-ERROR bit) on the SDO pin, as shown in [Table 5](#). Additionally, by setting ALM-EN = 1 and ALM-SEL = 0 in the CONFIG register, the SDO/ALARM pin is configured as a CRC alarm pin.

**Table 5. Write Operation Error Checking Cycle**

| BIT   | FIELD     | DESCRIPTION   |
|-------|-----------|---|
| 31    | RW        | Echo RW from previous access cycle (RW = 0).            |
| 30    | CRC-ERROR | Returns a 1 when a CRC error is detected, 0 otherwise.  |
| 29:28 | Reserved  | Echo bits 29:28 from previous access cycle (all zeros). |
| 27:24 | A[3:0]    | Echo address from previous access cycle.                |
| 23:8  | DO[15:0]  | Echo data from previous access cycle.                   |
| 7:0   | CRC       | Calculated CRC value of bits 31:8.                      |

A read operation must be followed by a second access cycle to get the requested data on the SDO pin. The error check result (CRC-ERROR bit) from the read command is output on the SDO pin, as shown in [Table 6](#). As in the case of a write operation failing the CRC check, the SDO/ALARM pin if configured as a CRC alarm pin can be used to indicate a read command CRC failure.

**Table 6. Read Operation Error Checking Cycle**

| BIT   | FIELD     | DESCRIPTION   |
|-------|-----------|---|
| 31    | RW        | Echo RW from previous access cycle (RW = 1).            |
| 30    | CRC-ERROR | Returns a 1 when a CRC error is detected, 0 otherwise.  |
| 29:28 | Reserved  | Echo bits 29:28 from previous access cycle (all zeros). |
| 27:24 | A[3:0]    | Echo address from previous access cycle.                |
| 23:8  | DO[15:0]  | Readback data requested on previous access cycle.       |
| 7:0   | CRC       | Calculated CRC value of bits 31:8.                      |

#### 8.4.4 Power-Down Mode

The DACx0508 DAC output amplifiers and internal reference can be independently powered down through the CONFIG register. At power-up all output channels and the device internal reference are active by default. A DAC output channel in power-down mode is connected internally to GND through a 1 kΩ resistor.

## 8.5 Programming


The DACx0508 is controlled through a flexible serial interface that is compatible with SPI type interfaces used on many microcontrollers and DSP controllers. Table 7 shows the SPI timing requirements. Figure 65 and Figure 66 show the SPI write and read timing diagrams, respectively.

**Table 7. Programming Timing Requirements<sup>(1)</sup>**


|  |  | $V_{IO} = 1.7\text{ V to }2.7\text{ V}$ |     |      | $V_{IO} = 2.7\text{ V to }5.5\text{ V}$ |     |     | UNIT    |
|--|--|---|-----|------|---|-----|-----|---------|
|  |  | MIN                                     | NOM | MAX  | MIN                                     | NOM | MAX |         |
| <b>SERIAL INTERFACE – WRITE OPERATION</b>                          |  |   |     |      |   |     |     |         |
| $f_{SCLK}$   | SCLK frequency                                   |   |     | 50   |   |     | 50  | MHz     |
| $t_{SCLKHIGH}$   | SCLK high time                                   | 9                                       |     |      | 9                                       |     |     | ns      |
| $t_{SCLKLOW}$  | SCLK low time                                    | 9                                       |     |      | 9                                       |     |     | ns      |
| $t_{SDIS}$   | SDI setup  | 5                                       |     |      | 5                                       |     |     | ns      |
| $t_{SDIH}$   | SDI hold   | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSS}$  | $\overline{CS}$ to SCLK falling edge setup       | 13                                      |     |      | 13                                      |     |     | ns      |
| $t_{CSH}$  | SCLK falling edge to $\overline{CS}$ rising edge | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSHIGH}$   | $\overline{CS}$ high time                        | 15                                      |     |      | 15                                      |     |     | ns      |
| $t_{CSIGNORE}$   | SCLK falling edge to $\overline{CS}$ ignore      | 7                                       |     |      | 7                                       |     |     | ns      |
| <b>SERIAL INTERFACE – READ AND DAISY CHAIN OPERATION, FSDO = 0</b> |  |   |     |      |   |     |     |         |
| $f_{SCLK}$   | SCLK frequency                                   |   |     | 12   |   |     | 18  | MHz     |
| $t_{SCLKHIGH}$   | SCLK high time                                   | 35                                      |     |      | 25                                      |     |     | ns      |
| $t_{SCLKLOW}$  | SCLK low time                                    | 35                                      |     |      | 25                                      |     |     | ns      |
| $t_{SDIS}$   | SDI setup  | 5                                       |     |      | 5                                       |     |     | ns      |
| $t_{SDIH}$   | SDI hold   | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSS}$  | $\overline{CS}$ to SCLK falling edge setup       | 32                                      |     |      | 20                                      |     |     | ns      |
| $t_{CSH}$  | SCLK falling edge to $\overline{CS}$ rising edge | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSHIGH}$   | $\overline{CS}$ high time                        | 15                                      |     |      | 15                                      |     |     | ns      |
| $t_{SDODLY}$   | SDO output delay from SCLK rising edge           | 3.5                                     |     | 33.5 | 3.5                                     |     | 23  | ns      |
| $t_{SDODZ}$  | SDO driven to tri-state                          | 0                                       |     | 30   | 0                                       |     | 25  | ns      |
| $t_{CSIGNORE}$   | SCLK falling edge to $\overline{CS}$ ignore      | 7                                       |     |      | 7                                       |     |     | ns      |
| <b>SERIAL INTERFACE – READ AND DAISY CHAIN OPERATION, FSDO = 1</b> |  |   |     |      |   |     |     |         |
| $f_{SCLK}$   | SCLK frequency                                   |   |     | 20   |   |     | 25  | MHz     |
| $t_{SCLKHIGH}$   | SCLK high time                                   | 22                                      |     |      | 18                                      |     |     | ns      |
| $t_{SCLKLOW}$  | SCLK low time                                    | 22                                      |     |      | 18                                      |     |     | ns      |
| $t_{SDIS}$   | SDI setup  | 5                                       |     |      | 5                                       |     |     | ns      |
| $t_{SDIH}$   | SDI hold   | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSS}$  | $\overline{CS}$ to SCLK falling edge setup       | 32                                      |     |      | 20                                      |     |     | ns      |
| $t_{CSH}$  | SCLK falling edge to $\overline{CS}$ rising edge | 10                                      |     |      | 10                                      |     |     | ns      |
| $t_{CSHIGH}$   | $\overline{CS}$ high time                        | 15                                      |     |      | 15                                      |     |     | ns      |
| $t_{SDODLY}$   | SDO output delay from SCLK falling edge          | 3.5                                     |     | 45   | 3.5                                     |     | 32  | ns      |
| $t_{SDODZ}$  | SDO driven to tri-state                          | 0                                       |     | 30   | 0                                       |     | 25  | ns      |
| $t_{CSIGNORE}$   | SCLK falling edge to $\overline{CS}$ ignore      | 7                                       |     |      | 7                                       |     |     | ns      |
| <b>DIGITAL LOGIC</b>   |  |   |     |      |   |     |     |         |
| $t_{RSTDLTPOR}$  | POR reset delay                                  |   | 170 | 250  |   | 170 | 250 | $\mu$ s |
| $t_{DACWAIT}$  | Sequential DAC output updates                    | 1                                       |     |      | 1                                       |     |     | $\mu$ s |
| $t_{CLR}$  | $\overline{CLR}$ pulse                           | 20                                      |     |      | 20                                      |     |     | ns      |
| $t_{CLRDR}$  | $\overline{CLR}$ delay <sup>(2)</sup>            |   |     | 100  |   |     | 100 | ns      |

(1) All input signals are specified with  $t_R = t_F = 1\text{ ns/V}$  (10% to 90% of  $V_{IO}$ ), timed from a voltage level of  $(V_{IL} + V_{IH})/2$ ,  $V_{DD} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{IO} = 1.7\text{ V to }5.5\text{ V}$ ,  $V_{REFIN} = 1.25\text{ V to }5.5\text{ V}$ , SDO loaded with 20 pF,  $T_A = -40^\circ\text{C to }+125^\circ\text{C}$

(2) Specified from a logic-low on  $\overline{CLR}$  pin to when the DAC output starts to change. In the special case when the DAC output is at GND or  $V_{DD}$ , the  $\overline{CLR}$  delay may be as long as 1  $\mu$ s

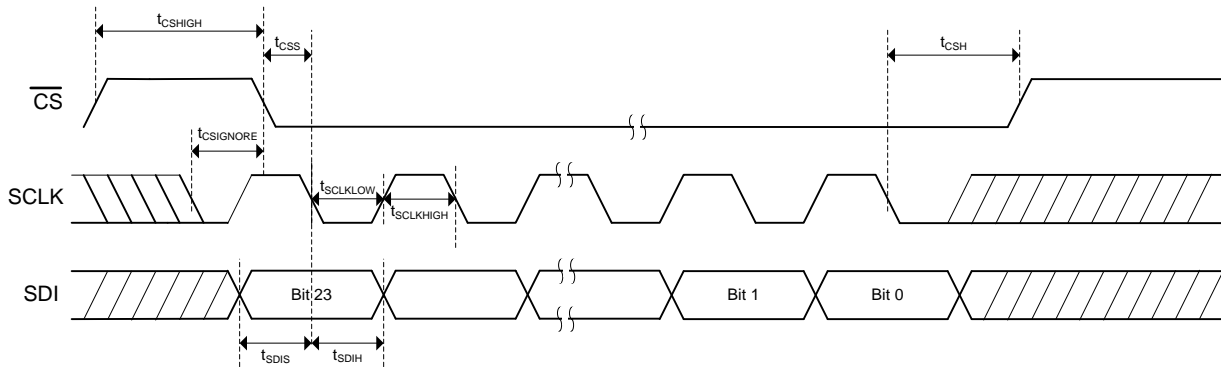

**Figure 65. Serial Interface Write Timing Diagram**

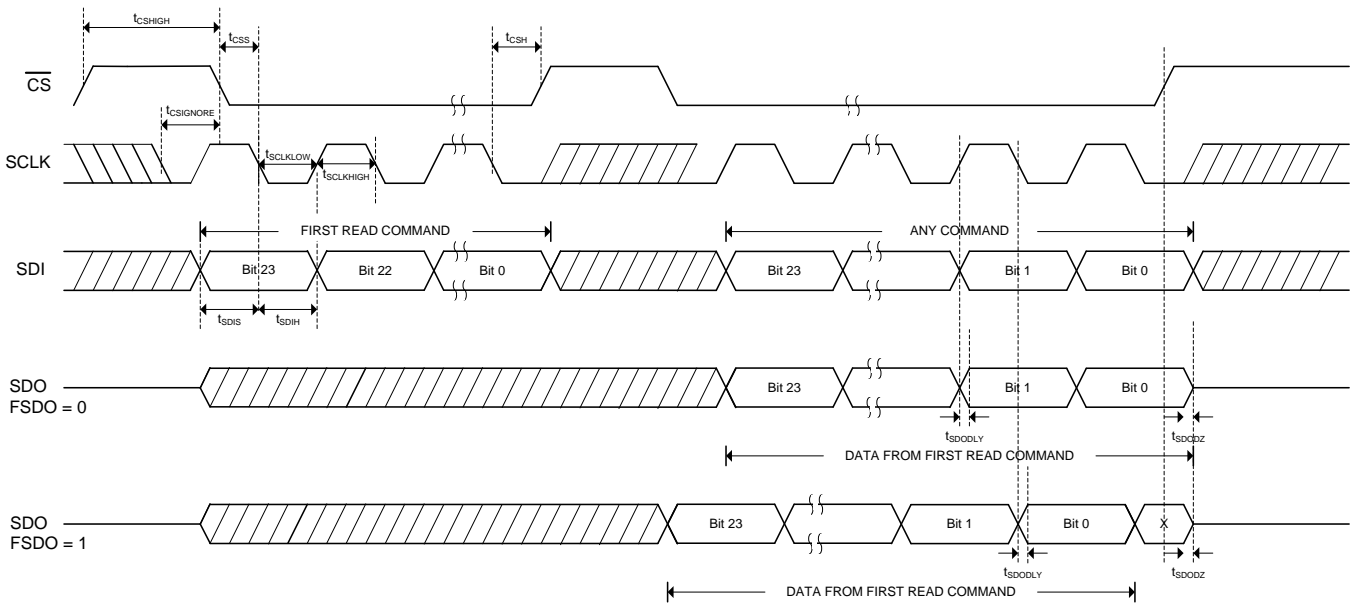

**Figure 66. Serial Interface Read Timing Diagram**

## 8.6 Register Map

Table 8. Register Map

| REGISTER   | TYPE | RESET | ADDRESS BITS |    |    |    | DATA BITS          |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
|------------|------|-------|--------------|----|----|----|--------------------|---------|--------|--------|-----------------------------|-----------------------------|------------|------------|--------------|----|----|-------|-----------------|----|-----------|----|
|            |      |       | A3           | A2 | A1 | A0 | D15                | D14     | D13    | D12    | D11                         | D10                         | D9         | D8         | D7           | D6 | D5 | D4    | D3              | D2 | D1        | D0 |
| NOP        | W    | 0000  | 0            | 0  | 0  | 0  | NOP                |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DEVICE ID  | R    | —     | 0            | 0  | 0  | 1  | DEVICEID           |         |        |        |                             |                             |            |            |              |    |    |       |                 |    | VERSIONID |    |
| SYNC       | R/W  | FF00  | 0            | 0  | 1  | 0  | DACx-BRDCAST-EN    |         |        |        |                             |                             |            |            | DACx-SYNC-EN |    |    |       |                 |    |           |    |
| CONFIG     | R/W  | 0000  | 0            | 0  | 1  | 1  | RESERVED           | ALM SEL | ALM EN | CRC EN | F SDO                       | D SDO                       | REF PW DWN | DACx-PWDWN |              |    |    |       |                 |    |           |    |
| GAIN       | R/W  | 0000  | 0            | 1  | 0  | 0  | RESERVED           |         |        |        | CLR-4TO7-MSK <sup>(1)</sup> | CLR-0TO3-MSK <sup>(1)</sup> | REF DIV-EN | BUFFx-GAIN |              |    |    |       |                 |    |           |    |
| TRIGGER    | W    | 0000  | 0            | 1  | 0  | 1  | RESERVED           |         |        |        |                             |                             |            |            |              |    |    | L DAC | SOFT-RESET[3:0] |    |           |    |
| BRDCAST    | R/W  | 0000  | 0            | 1  | 1  | 0  | BRDCAST-DATA[15:0] |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| STATUS     | R/W  | 0000  | 0            | 1  | 1  | 1  | RESERVED           |         |        |        |                             |                             |            |            |              |    |    |       |                 |    | REF ALM   |    |
| DAC0       | R/W  | 0000  | 1            | 0  | 0  | 0  | DAC0-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC1       | R/W  | 0000  | 1            | 0  | 0  | 1  | DAC1-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC2       | R/W  | 0000  | 1            | 0  | 1  | 0  | DAC2-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC3       | R/W  | 0000  | 1            | 0  | 1  | 1  | DAC3-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC4       | R/W  | 0000  | 1            | 1  | 0  | 0  | DAC4-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC5       | R/W  | 0000  | 1            | 1  | 0  | 1  | DAC5-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC6       | R/W  | 0000  | 1            | 1  | 1  | 0  | DAC6-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| DAC7       | R/W  | 0000  | 1            | 1  | 1  | 1  | DAC7-DATA[15:0]    |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |
| All Others | —    | —     | —            | —  | —  | —  | RESERVED           |         |        |        |                             |                             |            |            |              |    |    |       |                 |    |           |    |

(1) DACx0508C only. Reserved bits in DACx0508.

### 8.6.1 NOP Register (address = 0x00) [reset = 0x0000]

**Figure 67. NOP Register**

|     |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 15  | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| NOP |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| W   |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 9. NOP Register Field Descriptions**

| Bit  | Field | Type | Reset  | Description   |
|------|-------|------|--------|---|
| 15:0 | NOP   | W    | 0x0000 | No operation. Write 0000h for proper no-operation command |

### 8.6.2 DEVICE ID Register (address = 0x01) [reset = 0x---]

**Figure 68. DEVICE ID Register**

|          |    |    |    |    |    |   |   |   |   |   |   |   |           |   |   |
|----------|----|----|----|----|----|---|---|---|---|---|---|---|-----------|---|---|
| 15       | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2         | 1 | 0 |
| DEVICEID |    |    |    |    |    |   |   |   |   |   |   |   | VERSIONID |   |   |
| R        |    |    |    |    |    |   |   |   |   |   |   |   | R         |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 10. DEVICE ID Field Descriptions**

| Bit  | Field     | Type | Reset | Description  |
|------|-----------|------|-------|--|
| 15:2 | DEVICEID  | R    | ----  | Device ID:<br>D15 Reserved - 0<br>D14:12 Resolution - 000 (16-bit); 001 (14-bit); 010 (12-bit)<br>D11:8 Channels - 1000 (8 channels)<br>D7 Reset - 0 (DACx0508Z: reset to zero); 1 (DACx0508M: reset-to-midscale)<br>D6:2 Reserved - 00101 |
| 1:0  | VERSIONID | R    | 10    | Version ID. Subject to change  |

**8.6.3 SYNC Register (address = 0x2) [reset = 0xFF00]**
**Figure 69. SYNC Register**

|                 |  |                 |  |                 |  |                 |  |                 |  |                 |  |                 |  |                 |  |
|-----------------|--|-----------------|--|-----------------|--|-----------------|--|-----------------|--|-----------------|--|-----------------|--|-----------------|--|
| 15              |  | 14              |  | 13              |  | 12              |  | 11              |  | 10              |  | 9               |  | 8               |  |
| DAC7-BRDCAST-EN |  | DAC6-BRDCAST-EN |  | DAC5-BRDCAST-EN |  | DAC4-BRDCAST-EN |  | DAC3-BRDCAST-EN |  | DAC2-BRDCAST-EN |  | DAC1-BRDCAST-EN |  | DAC0-BRDCAST-EN |  |
| R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  |
| 7               |  | 6               |  | 5               |  | 4               |  | 3               |  | 2               |  | 1               |  | 0               |  |
| DAC7-SYNC-EN    |  | DAC6-SYNC-EN    |  | DAC5-SYNC-EN    |  | DAC4-SYNC-EN    |  | DAC3-SYNC-EN    |  | DAC2-SYNC-EN    |  | DAC1-SYNC-EN    |  | DAC0-SYNC-EN    |  |
| R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  | R/W             |  |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 11. SYNC Register Field Descriptions**

| Bit | Field           | Type | Reset | Description   |
|-----|-----------------|------|-------|---|
| 15  | DAC7-BRDCAST-EN | R/W  | 1     | When set to 1 the corresponding DAC is set to update its output after a serial interface write to the BRDCAST register. When cleared to 0 the corresponding DAC output remains unaffected after a serial interface write to the BRDCAST register. |
| 14  | DAC6-BRDCAST-EN | R/W  | 1     |   |
| 13  | DAC5-BRDCAST-EN | R/W  | 1     |   |
| 12  | DAC4-BRDCAST-EN | R/W  | 1     |   |
| 11  | DAC3-BRDCAST-EN | R/W  | 1     |   |
| 10  | DAC2-BRDCAST-EN | R/W  | 1     |   |
| 9   | DAC1-BRDCAST-EN | R/W  | 1     |   |
| 8   | DAC0-BRDCAST-EN | R/W  | 1     |   |
| 7   | DAC7-SYNC-EN    | R/W  | 0     | When set to 1 the corresponding DAC output is set to update in response to an LDAC trigger (synchronous mode). When cleared to 0 the corresponding DAC output is set to update immediately on a CS rising edge (asynchronous mode).               |
| 6   | DAC6-SYNC-EN    | R/W  | 0     |   |
| 5   | DAC5-SYNC-EN    | R/W  | 0     |   |
| 4   | DAC4-SYNC-EN    | R/W  | 0     |   |
| 3   | DAC3-SYNC-EN    | R/W  | 0     |   |
| 2   | DAC2-SYNC-EN    | R/W  | 0     |   |
| 1   | DAC1-SYNC-EN    | R/W  | 0     |   |
| 0   | DAC0-SYNC-EN    | R/W  | 0     |   |



**8.6.4 CONFIG Register (address = 0x3) [reset = 0x0000]**
**Figure 70. CONFIG Register**

|            |            |            |            |            |            |            |            |
|------------|------------|------------|------------|------------|------------|------------|------------|
| 15         | 14         | 13         | 12         | 11         | 10         | 9          | 8          |
| Reserved   |            | ALM-SEL    | ALM-EN     | CRC-EN     | FSDO       | DSDO       | REF-PWDWN  |
| —          |            | R/W        | R/W        | R/W        | R/W        | R/W        | R/W        |
| 7          | 6          | 5          | 4          | 3          | 2          | 1          | 0          |
| DAC7-PWDWN | DAC6-PWDWN | DAC5-PWDWN | DAC4-PWDWN | DAC3-PWDWN | DAC2-PWDWN | DAC1-PWDWN | DAC0-PWDWN |
| R/W        | R/W        | R/W        | R/W        | R/W        | R/W        | R/W        | R/W        |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 12. CONFIG Register Field Descriptions**

| Bit   | Field      | Type | Reset | Description  |
|-------|------------|------|-------|--|
| 15:14 | Reserved   | —    | 00    | Reserved for factory use   |
| 13    | ALM-SEL    | R/W  | 0     | ALARM select.<br>0: $\overline{\text{ALARM}}$ pin is CRC-ERROR<br>1: $\overline{\text{ALARM}}$ pin is REF-ALARM  |
| 12    | ALM-EN     | R/W  | 0     | Configure SDO/ $\overline{\text{ALARM}}$ pin. When 1: SDO/ $\overline{\text{ALARM}}$ pin is an active-low, open-drain, alarm pin. An external 10 k $\Omega$ pullup resistor to $V_{\text{IO}}$ is required. FSDO and DSDO bits are ignored. When 0: SDO/ $\overline{\text{ALARM}}$ pin is a serial interface, push-pull, SDO pin |
| 11    | CRC-EN     | R/W  | 0     | CRC enable bit. Set to 1 to enable CRC. Set to 0 to disable  |
| 10    | FSDO       | R/W  | 0     | Fast SDO bit (half-cycle speedup). When 0, SDO updates on an SCLK rising edge. When 1, SDO updates a half-cycle earlier, during an SCLK falling edge.  |
| 9     | DSDO       | R/W  | 0     | Disable SDO bit. When 1, SDO is always tri-stated. When 0, SDO is driven while $\overline{\text{CS}}$ is low, and tri-stated while $\overline{\text{CS}}$ is high  |
| 8     | REF-PWDWN  | R/W  | 0     | When set to 1 disables the device internal reference   |
| 7     | DAC7-PWDWN | R/W  | 0     | When set to 1 the corresponding DAC is set in power-down mode and its output is connected to GND through a 1 k $\Omega$ internal resistor.   |
| 6     | DAC6-PWDWN | R/W  | 0     |  |
| 5     | DAC5-PWDWN | R/W  | 0     |  |
| 4     | DAC4-PWDWN | R/W  | 0     |  |
| 3     | DAC3-PWDWN | R/W  | 0     |  |
| 2     | DAC2-PWDWN | R/W  | 0     |  |
| 1     | DAC1-PWDWN | R/W  | 0     |  |
| 0     | DAC0-PWDWN | R/W  | 0     |  |

**8.6.5 GAIN Register (address = 0x04) [reset = 0x---]**
**Figure 71. GAIN Register**

|            |  |            |  |            |  |            |  |            |  |  |  |  |  |            |  |
|------------|--|------------|--|------------|--|------------|--|------------|--|--|--|--|--|------------|--|
| 15         |  | 14         |  | 13         |  | 12         |  | 11         |  | 10   |  | 9  |  | 8          |  |
| Reserved   |  |            |  |            |  |            |  |            |  | Reserved/<br>CLR-4TO7-<br>MSK <sup>(1)</sup> |  | Reserved/<br>CLR-0TO3-<br>MSK <sup>(1)</sup> |  | REFDIV-EN  |  |
| —          |  |            |  |            |  |            |  |            |  | R/W  |  | R/W  |  | R/W        |  |
| 7          |  | 6          |  | 5          |  | 4          |  | 3          |  | 2  |  | 1  |  | 0          |  |
| BUFF7-GAIN |  | BUFF6-GAIN |  | BUFF5-GAIN |  | BUFF4-GAIN |  | BUFF3-GAIN |  | BUFF2-GAIN                                   |  | BUFF1-GAIN                                   |  | BUFF0-GAIN |  |
| R/W        |  | R/W        |  | R/W        |  | R/W        |  | R/W        |  | R/W  |  | R/W  |  | R/W        |  |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

(1) DACx0508C only. Reserved bits in DACx0508.

**Table 13. GAIN Register Field Descriptions**

| Bit   | Field                   | Type | Reset | Description   |
|-------|-------------------------|------|-------|---|
| 15:11 | Reserved                | —    | 0     | Reserved for factory use.   |
| 10    | Reserved / CLR-4TO7-MSK | R/W  | 0     | DACx0508. Reserved for factory use.   |
| 9     | Reserved / CLR-0TO3-MSK | R/W  | 0     | DACx0508C. When cleared to 0 the corresponding DAC group is set to clear in response to a logic-low value on the CLR pin. When set to 1 the corresponding DAC group remains unaffected by the CLR pin.                                    |
| 8     | REFDIV-EN               | R/W  | 0/1   | When set to 1 the reference voltage is internally divided by a factor of 2. When cleared to 0 the reference voltage is unaffected.  |
| 7     | BUFF7-GAIN              | R/W  | 0/1   | When set to 1 the buffer amplifier for corresponding DAC has a gain of 2. Default value for the DACx0508M devices. When cleared to 0 the buffer amplifier for corresponding DAC has a gain of 1. Default value for the DACx0508Z devices. |
| 6     | BUFF6-GAIN              | R/W  | 0/1   |   |
| 5     | BUFF5-GAIN              | R/W  | 0/1   |   |
| 4     | BUFF4-GAIN              | R/W  | 0/1   |   |
| 3     | BUFF3-GAIN              | R/W  | 0/1   |   |
| 2     | BUFF2-GAIN              | R/W  | 0/1   |   |
| 1     | BUFF1-GAIN              | R/W  | 0/1   |   |
| 0     | BUFF0-GAIN              | R/W  | 0/1   |   |

**8.6.6 TRIGGER Register (address = 0x05) [reset = 0x0000]**
**Figure 72. TRIGGER Register**

|          |  |    |  |    |  |    |  |    |  |    |  |   |  |   |  |   |  |   |  |      |  |                 |  |   |  |   |  |   |  |   |  |
|----------|--|----|--|----|--|----|--|----|--|----|--|---|--|---|--|---|--|---|--|------|--|-----------------|--|---|--|---|--|---|--|---|--|
| 15       |  | 14 |  | 13 |  | 12 |  | 11 |  | 10 |  | 9 |  | 8 |  | 7 |  | 6 |  | 5    |  | 4               |  | 3 |  | 2 |  | 1 |  | 0 |  |
| Reserved |  |    |  |    |  |    |  |    |  |    |  |   |  |   |  |   |  |   |  | LDAC |  | SOFT-RESET[3:0] |  |   |  |   |  |   |  |   |  |
| —        |  |    |  |    |  |    |  |    |  |    |  |   |  |   |  |   |  |   |  | W    |  | W               |  |   |  |   |  |   |  |   |  |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 14. TRIGGER Register Field Descriptions**

| Bit  | Field           | Type | Reset | Description   |
|------|-----------------|------|-------|---|
| 15:5 | Reserved        | —    | 0     | Reserved for factory use.   |
| 4    | LDAC            | W    | 0     | Set this bit to 1 to synchronously load those DACs that have been set in synchronous mode in the SYNC register. |
| 3:0  | SOFT-RESET[3:0] | W    | 0x0   | When set to the reserved code 1010 resets the device to its default state.                                      |

### 8.6.7 BRDCAST Register (address = 0x6) [reset = 0x0000]

**Figure 73. BRDCAST Register**

|                    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|--------------------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 15                 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| BRDCAST-DATA[15:0] |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| R/W                |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 15. BRDCAST Register Field Descriptions**

| Bit  | Field              | Type | Reset  | Description  |
|------|--------------------|------|--------|--|
| 15:0 | BRDCAST-DATA[15:0] | R/W  | 0x0000 | Writing to the BRDCAST register forces those DAC channels that have been set to broadcast in the SYNC register to update their active data register with the BRDCAST-DATA value. Data are MSB aligned in straight binary format and follows the format below:<br>DAC80508: { DATA[15:0] }<br>DAC70508: { DATA[13:0], x, x }<br>DAC60508: { DATA[11:0], x, x, x, x }<br>x – Don't care bits |

### 8.6.8 STATUS Register (address = 0x7) [reset = 0x0000]

**Figure 74. STATUS Register**

|          |    |    |    |    |    |   |   |   |   |   |   |   |   |   |         |
|----------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---------|
| 15       | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0       |
| Reserved |    |    |    |    |    |   |   |   |   |   |   |   |   |   | REF-ALM |
| —        |    |    |    |    |    |   |   |   |   |   |   |   |   |   | R/W     |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 16. STATUS Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description  |
|------|----------|------|-------|--|
| 15:1 | Reserved | —    | 0     | Reserved for factory use.  |
| 0    | REF-ALM  | R    | 0     | Reference alarm bit. Reads 1 when the difference between $V_{REF/DIV}$ and $V_{DD}$ is below the required minimum analog threshold. Reads 0 otherwise. |

### 8.6.9 DACx Register (address = 0x8 to 0xF) [reset = 0x0000 or 0x8000]

**Figure 75. DACx Register**

|                 |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|-----------------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 15              | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DACx-DATA[15:0] |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| R/W             |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 17. DACx Register Field Descriptions**

| Bit  | Field           | Type | Reset            | Description   |
|------|-----------------|------|------------------|---|
| 15:0 | DACx-DATA[15:0] | R/W  | 0x0000 or 0x8000 | Stores the 16-, 14- or 12-bit data to be loaded to DACx in MSB aligned straight binary format. The default value is zero-code for the DACx0508Z devices and midscale-code for the DACx0508M ones. Data follows the format below:<br>DAC80508: { DATA[15:0] }<br>DAC70508: { DATA[13:0], x, x }<br>DAC60508: { DATA[11:0], x, x, x, x }<br>x – Don't care bits |

## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The high linearity, small package size and wide temperature range make the DACx0508 suitable in applications such as optical networking, wireless infrastructure, industrial automation and data acquisition systems. The device incorporates a 2.5 V internal reference with an internal reference divider circuit that enables full-scale DAC output voltages of 1.25 V, 2.5 V, or 5 V.

#### 9.1.1 Interfacing to Microcontroller

Figure 76 displays a typical serial interface that may be observed when connecting the DACx0508 SPI serial interface to a (master) microcontroller type platform. The setup for the interface is as follows: The microcontroller output SPI CLK drives the SCLK pin of the DACx0508, while the DACx0508 SDI pin is driven by the MOSI pin of the microcontroller. The  $\overline{\text{CS}}$  pin of the DACx0508 can be asserted from a general program input/output pin of the microcontroller. When data are to be transmitted to the DACx0508, the  $\overline{\text{CS}}$  pin is taken low. The data from the microcontroller is then transmitted to the DACx0508, totaling 24 bits latched into the DACx0508 device through the falling edge of SCLK.  $\overline{\text{CS}}$  is then brought high after the completed write. The DACx0508 requires data with the MSB as the first bit received.

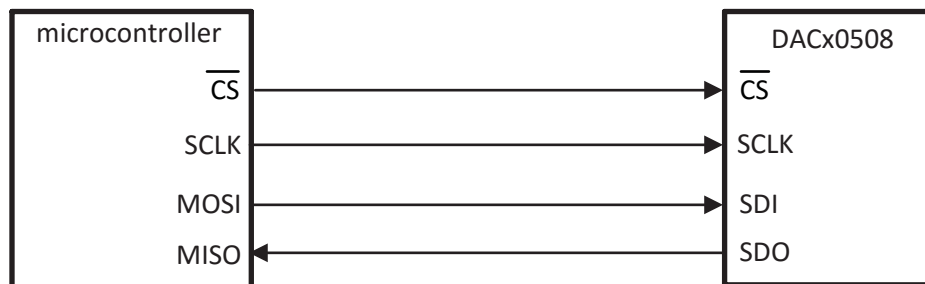

Copyright © 2017, Texas Instruments Incorporated

**Figure 76. Typical Serial Interface**

## Application Information (continued)

### 9.1.2 Programmable Current Source Circuit


The DACx0508 can be integrated into the circuit in [Figure 77](#) to implement an improved Howland current pump for precise voltage to current conversions. Bidirectional current flow and high voltage compliance are two features of the circuit. With a matched resistor network, the load current of the circuit is shown by [Equation 2](#).

$$I_L = \frac{(R2 + R3) / R1}{R3} \times V_{REF} \times \frac{CODE}{2^n} \quad (2)$$

The value of R3 in [Equation 2](#) can be reduced to increase the output current drive of U3. U3 can drive  $\pm 20$  mV in both directions with voltage compliance limited up to 15 V by the U3 voltage supply. Elimination of the circuit compensation capacitor C1 in the circuit is not suggested as a result of the change in the output impedance  $Z_O$ , according to [Equation 3](#).

$$Z_O = \frac{(R1')(R3)(R1 + R2)}{R1(R2' + R3') - R1'(R2 + R3)} \quad (3)$$

As shown in [Equation 3](#), with matched resistors,  $Z_O$  is infinite and the circuit is optimum for use as a current source. However, if unmatched resistors are used,  $Z_O$  is positive or negative with negative output impedance being a potential cause of oscillation. Therefore, by incorporating C1 into the circuit, possible oscillation problems are eliminated. The value of C1 can be determined for critical applications; for most applications, however, a value of several pF is suggested.

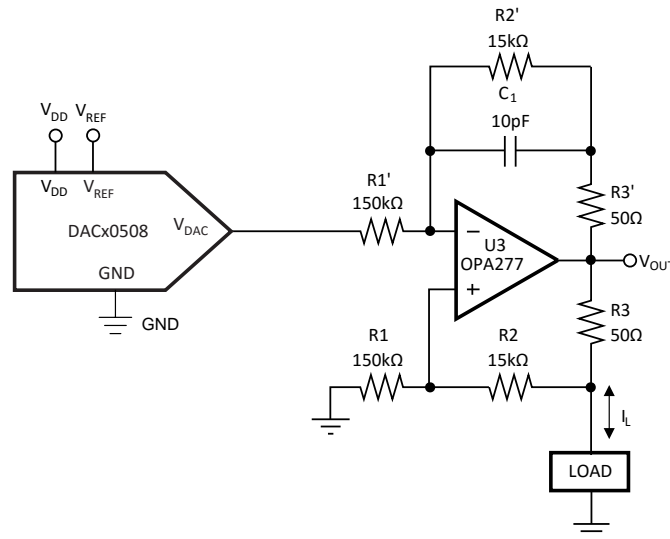


Copyright © 2017, Texas Instruments Incorporated

**Figure 77. Programmable Bidirectional Current Source Circuit**

## 9.2 Typical Application

The DACx0508 is designed for single-supply operation; however, a bipolar output is also possible using the circuit shown in [Figure 78](#).

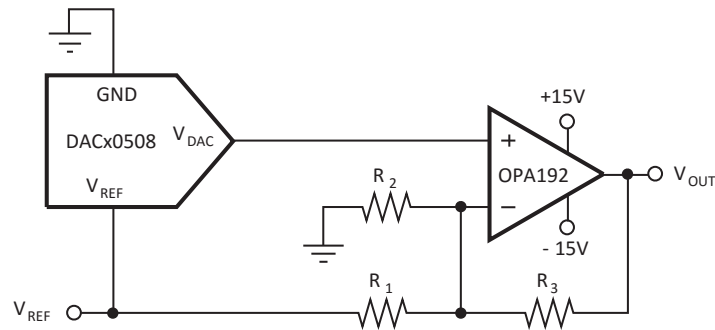

NOTE: Some pins omitted for clarity.

Copyright © 2017, Texas Instruments Incorporated

**Figure 78. Bipolar Operation Using the DACx0508**

### 9.2.1 Design Requirements

The circuit shown in [Figure 78](#) gives a bipolar output voltage at  $V_{OUT}$ . When  $GAIN = 1$ ,  $V_{OUT}$  can be calculated using [Equation 4](#):

$$V_{OUT}(\text{CODE}) = \left[ \left( V_{REF} \times \frac{\text{CODE}}{2^n} \right) \left( 1 + \frac{R_3}{R_2} + \frac{R_3}{R_1} \right) - \left( V_{REF} \times \frac{R_3}{R_1} \right) \right] \quad (4)$$

Where:

- $V_{OUT}(\text{CODE})$  = output voltage versus code
- $\text{CODE} = 0$  to  $2^n - 1$ . This is the digital code loaded to the DAC
- $V_{REF}$  = reference voltage applied to the DACx0508
- $n$  = resolution in bits. Either 12 (DAC60508), 14 (DAC70508) or 16 (DAC80508)

**Table 18. Design Parameters**

| PARAMETER | VALUE      |
|-----------|------------|
| $V_{OUT}$ | $\pm 10$ V |
| $V_{REF}$ | 2.5 V      |
| $n$       | 12         |

### 9.2.2 Detailed Design Procedure

The bipolar output span can be calculated through [Equation 4](#) by defining a few parameters, the first being the value for the reference voltage. Once a reference voltage is chosen, the gain resistors can be set accordingly by determining the desired  $V_{OUT}$  at code 0 and code  $2^n$ . For a  $V_{REF}$  of 2.5 V and a desired output voltage range of  $\pm 10$  V the calculation is as follows.

CODE = 0:

$$V_{OUT}(0) = - \left( V_{REF} \times \frac{R_3}{R_1} \right) = - \left( 2.5\text{V} \times \frac{R_3}{R_1} \right) \quad (5)$$

Setting the equation to minimum output span,  $V_{OUT}(0) = -10$  V, will reduce the equation to:  $R_3/R_1 = 4$ :


CODE = 4096:

Setting the equation to maximum output scan,  $V_{OUT}(4096) = 10$  V, and  $R_3/R_1 = 4$  will reduce the equation to:  $R_3/R_2 = 3$

It is important to note that the maximum code of a 12-bit DAC is 4095; code 4096 was used to simplify the equation above. For practical use, the true output span will encompass a range of  $-10\text{ V}$  to  $(10\text{ V} - 1\text{ LSB})$ , which in this case is  $-10\text{ V}$  to  $9.995\text{ V}$ .

**9.2.3 Application Curve**

The  $\pm 10\text{ V}$  output span with a reference voltage of  $2.5\text{ V}$  can be achieved by using values of  $30\text{ k}\Omega$ ,  $10\text{ k}\Omega$ , and  $7.5\text{ k}\Omega$  for  $R_3$ ,  $R_2$ , and  $R_1$  respectively. A curve to illustrate this output span is shown in [Figure 79](#). Note: 1% tolerance resistors were used in evaluating bipolar operation.

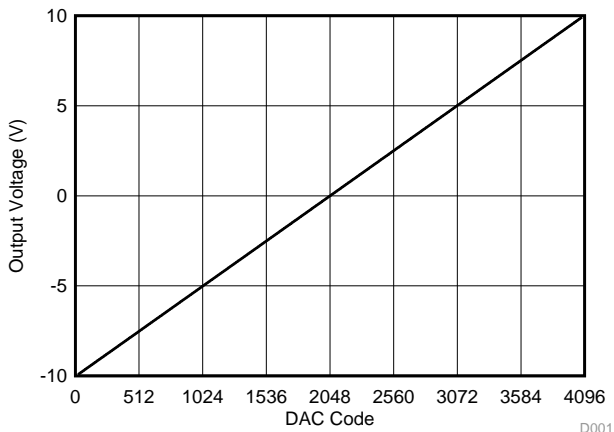

**Figure 79. Bipolar Operation**

## 10 Power Supply Recommendations

The DACx0508 operates within the specified  $V_{DD}$  supply range of 2.7 V to 5.5 V and  $V_{IO}$  supply range of 1.7 V to 5.5 V. The DACx0508 does not require specific supply sequencing.

The  $V_{DD}$  supply must be well-regulated and low-noise. Switching power supplies and dc/dc converters often have high frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high frequency spikes. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output. In order to further minimize noise from the power supply, include a 1- $\mu$ F to 10- $\mu$ F capacitor and 0.1- $\mu$ F bypass capacitor. The current consumption on the  $V_{DD}$  pin, the short-circuit current limit, and the load current for the device is listed in the [Electrical Characteristics](#). The power supply must meet the aforementioned current requirements.



## 11 Layout

### 11.1 Layout Guidelines

A precision analog component requires careful layout, the list below provides some insight into good layout practices.

- Bypass all power supply pins to ground with a low ESR ceramic bypass capacitor. The typical recommended bypass capacitance is 0.1- to 0.22- $\mu$ F ceramic with a X7R or NP0 dielectric.
- Place power supplies and REF bypass capacitors close to the pins to minimize inductance and optimize performance.
- Use a high-quality ceramic type NP0 or X7R for its optimal performance across temperature, and very low dissipation factor.
- The digital and analog sections must have proper placement with respect to the digital pins and analog pins of the DACx0508 device. The separation of analog and digital blocks minimizes coupling into neighboring blocks, as well as interaction between analog and digital return currents.

### 11.2 Layout Examples

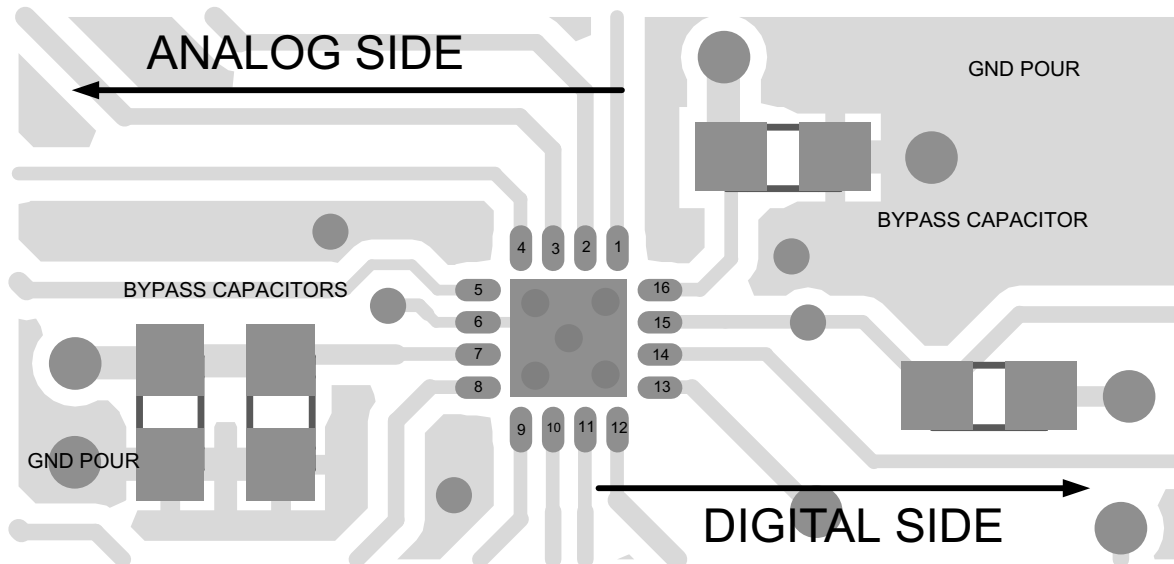


Figure 80. DACx0508 QFN Layout Example

Layout Examples (接下页)

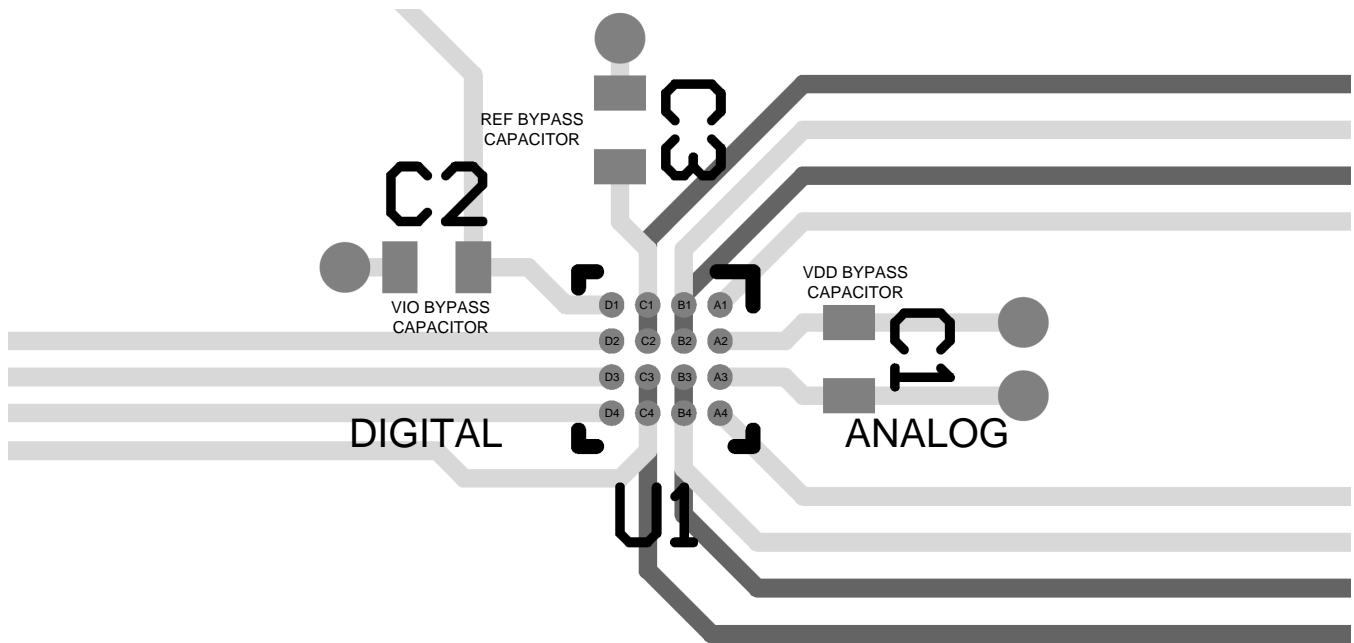


Figure 81. DACx0508 DSBGA Layout Example

## 12 器件和文档支持

### 12.1 相关链接

下表列出了快速访问链接。类别包括技术文档、支持与社区资源、工具和软件，以及申请样片或购买产品的快速链接。

表 19. 相关链接

| 器件       | 产品文件夹                 | 立即订购                  | 技术文档                  | 工具与软件                 | 支持和社区                 |
|----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| DAC80508 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| DAC70508 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| DAC60508 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |

### 12.2 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](http://TI.com.cn) 上的器件产品文件夹。单击右上角的 *通知我* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

**TI E2E™ 在线社区** *TI 的工程师对工程师 (E2E) 社区*。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](http://e2e.ti.com) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** *TI 参考设计支持* 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.4 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.5 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 12.6 术语表

[SLYZ022](#) — *TI 术语表*。

这份术语表列出并解释术语、缩写和定义。

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| DAC60508MCRTER   | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658MC                   | <a href="#">Samples</a> |
| DAC60508MCRTET   | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658MC                   | <a href="#">Samples</a> |
| DAC60508MCYZFR   | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65MC                    | <a href="#">Samples</a> |
| DAC60508MCYZFT   | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65MC                    | <a href="#">Samples</a> |
| DAC60508MRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658M                    | <a href="#">Samples</a> |
| DAC60508MRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658M                    | <a href="#">Samples</a> |
| DAC60508MYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65M                     | <a href="#">Samples</a> |
| DAC60508MYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65M                     | <a href="#">Samples</a> |
| DAC60508ZCRTER   | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658ZC                   | <a href="#">Samples</a> |
| DAC60508ZCRTET   | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658ZC                   | <a href="#">Samples</a> |
| DAC60508ZCYZFR   | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65ZC                    | <a href="#">Samples</a> |
| DAC60508ZCYZFT   | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65ZC                    | <a href="#">Samples</a> |
| DAC60508ZRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658Z                    | <a href="#">Samples</a> |
| DAC60508ZRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 658Z                    | <a href="#">Samples</a> |
| DAC60508ZYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65Z                     | <a href="#">Samples</a> |
| DAC60508ZYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 65Z                     | <a href="#">Samples</a> |
| DAC70508MRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 758M                    | <a href="#">Samples</a> |
| DAC70508MRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 758M                    | <a href="#">Samples</a> |
| DAC70508MYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 75M                     | <a href="#">Samples</a> |
| DAC70508MYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 75M                     | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| DAC70508ZRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 758Z                    | <a href="#">Samples</a> |
| DAC70508ZRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 758Z                    | <a href="#">Samples</a> |
| DAC70508ZYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 75Z                     | <a href="#">Samples</a> |
| DAC70508ZYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 75Z                     | <a href="#">Samples</a> |
| DAC80508MCRTER   | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858MC                   | <a href="#">Samples</a> |
| DAC80508MCRTET   | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858MC                   | <a href="#">Samples</a> |
| DAC80508MCYZFR   | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85MC                    | <a href="#">Samples</a> |
| DAC80508MCYZFT   | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85MC                    | <a href="#">Samples</a> |
| DAC80508MRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858M                    | <a href="#">Samples</a> |
| DAC80508MRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858M                    | <a href="#">Samples</a> |
| DAC80508MYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85M                     | <a href="#">Samples</a> |
| DAC80508MYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85M                     | <a href="#">Samples</a> |
| DAC80508ZCRTER   | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858ZC                   | <a href="#">Samples</a> |
| DAC80508ZCRTET   | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858ZC                   | <a href="#">Samples</a> |
| DAC80508ZCYZFR   | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85ZC                    | <a href="#">Samples</a> |
| DAC80508ZCYZFT   | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85ZC                    | <a href="#">Samples</a> |
| DAC80508ZRTER    | ACTIVE        | WQFN         | RTE             | 16   | 3000        | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858Z                    | <a href="#">Samples</a> |
| DAC80508ZRTET    | ACTIVE        | WQFN         | RTE             | 16   | 250         | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | 858Z                    | <a href="#">Samples</a> |
| DAC80508ZYZFR    | ACTIVE        | DSBGA        | YZF             | 16   | 3000        | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85Z                     | <a href="#">Samples</a> |
| DAC80508ZYZFT    | ACTIVE        | DSBGA        | YZF             | 16   | 250         | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | 85Z                     | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

---

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC60508MCRTER | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508MCRTET | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508MCYZFR | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508MCYZFT | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508MRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508MRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508MYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508MYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508ZCRTER | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508ZCRTET | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508ZCYZFR | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508ZCYZFT | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508ZRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508ZRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC60508ZYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC60508ZYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC70508MRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC70508MRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC70508MYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC70508MYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC70508ZRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC70508ZRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC70508ZYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC70508ZYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508MCRTER | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508MCRRET | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508MCYZFR | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508MCYZFT | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508MRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508MRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508MYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508MYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508ZCRTER | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508ZCRTET | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508ZCYZFR | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508ZCYZFT | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508ZRTER  | WQFN         | RTE             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508ZRTET  | WQFN         | RTE             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.0     | 8.0     | 12.0   | Q2            |
| DAC80508ZYZFR  | DSBGA        | YZF             | 16   | 3000 | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |
| DAC80508ZYZFT  | DSBGA        | YZF             | 16   | 250  | 180.0              | 8.4                | 2.54    | 2.54    | 0.76    | 4.0     | 8.0    | Q1            |



**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DAC60508MCRTER  | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC60508MCR TET | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC60508MCYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC60508MCYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC60508MRTER   | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC60508MRTET   | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC60508MYZFR   | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC60508MYZFT   | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC60508ZCRTER  | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC60508ZCRTET  | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC60508ZCYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC60508ZCYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC60508ZRTER   | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC60508ZRTET   | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC60508ZYZFR   | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC60508ZYZFT   | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC70508MRTER   | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC70508MRTET   | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DAC70508MYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC70508MYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC70508ZRTER  | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC70508ZRTET  | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC70508ZYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC70508ZYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC80508MCRTER | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC80508MCRTET | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC80508MCYZFR | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC80508MCYZFT | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC80508MRTER  | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC80508MRTET  | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC80508MYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC80508MYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC80508ZCRTER | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC80508ZCRTET | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC80508ZCYZFR | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC80508ZCYZFT | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |
| DAC80508ZRTER  | WQFN         | RTE             | 16   | 3000 | 367.0       | 367.0      | 38.0        |
| DAC80508ZRTET  | WQFN         | RTE             | 16   | 250  | 213.0       | 191.0      | 35.0        |
| DAC80508ZYZFR  | DSBGA        | YZF             | 16   | 3000 | 182.0       | 182.0      | 20.0        |
| DAC80508ZYZFT  | DSBGA        | YZF             | 16   | 250  | 182.0       | 182.0      | 20.0        |

## GENERIC PACKAGE VIEW

**RTE 16**

**WQFN - 0.8 mm max height**



3 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



4225944/A

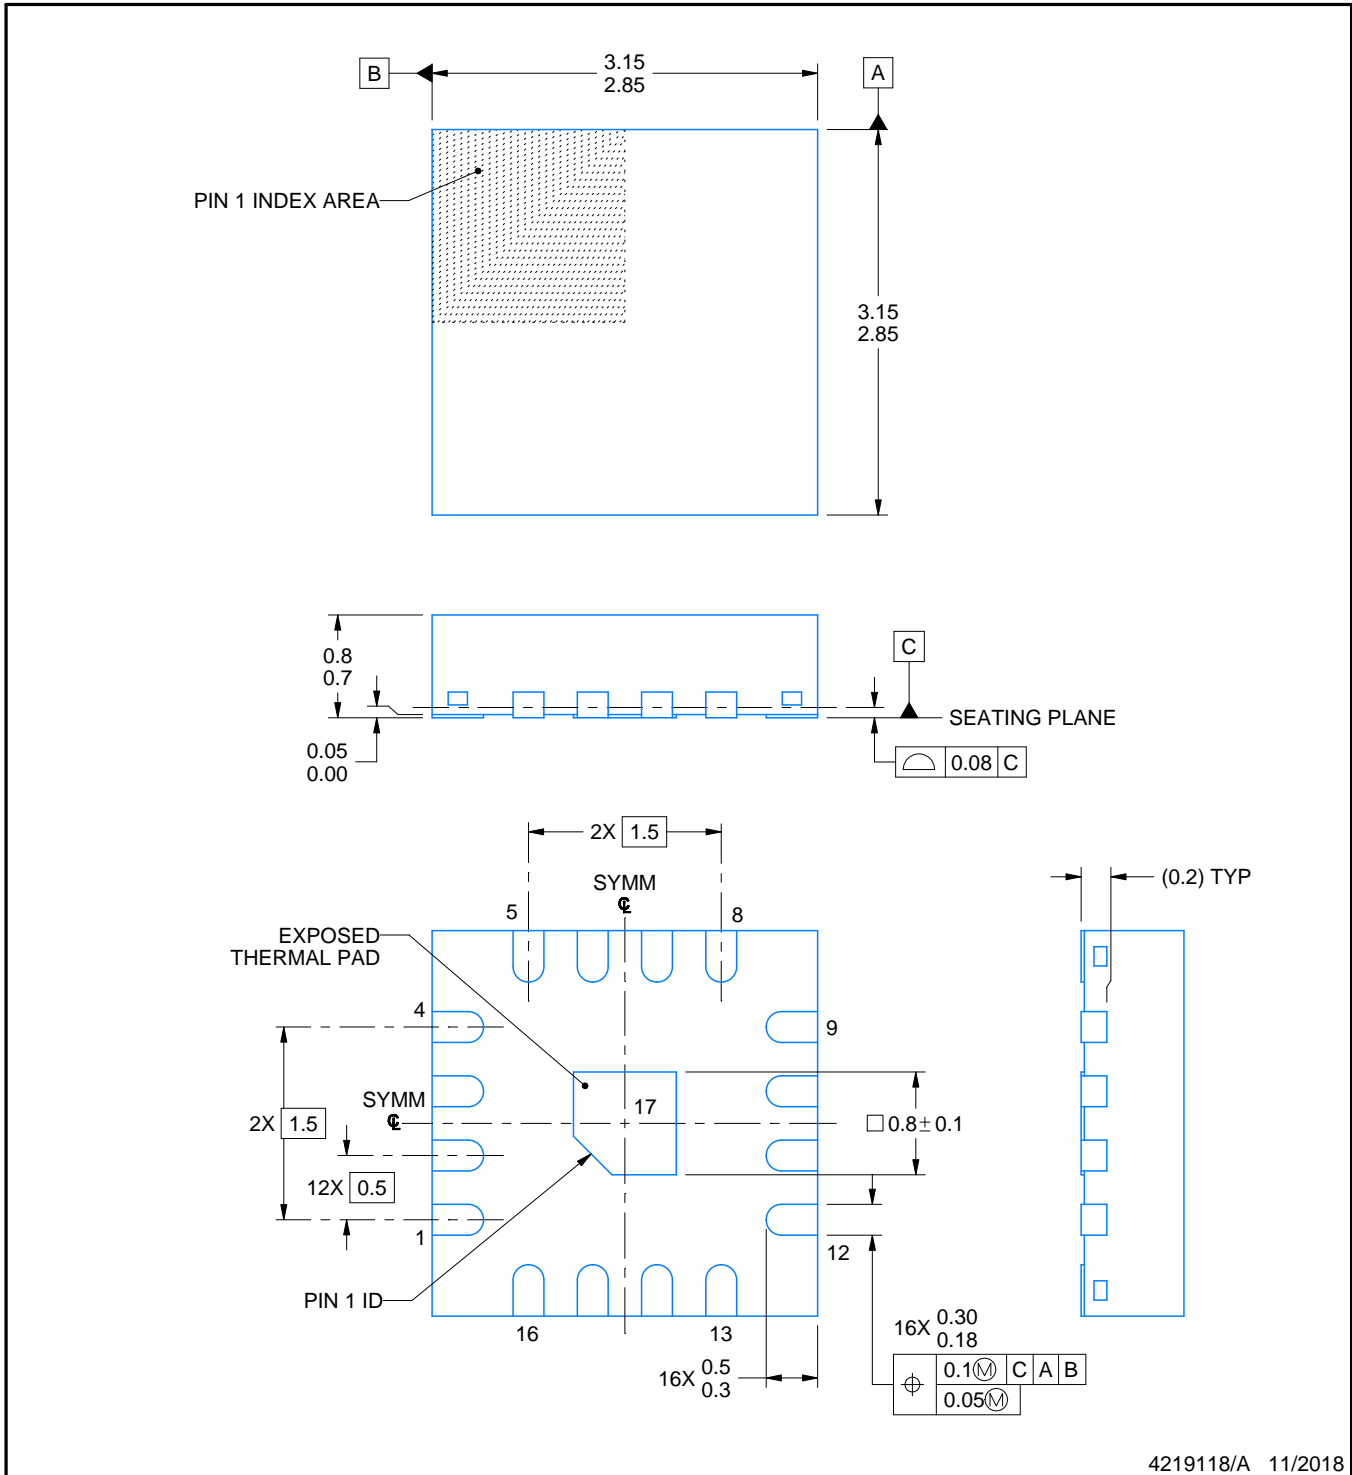

4219118/A 11/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT

RTE0016D

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

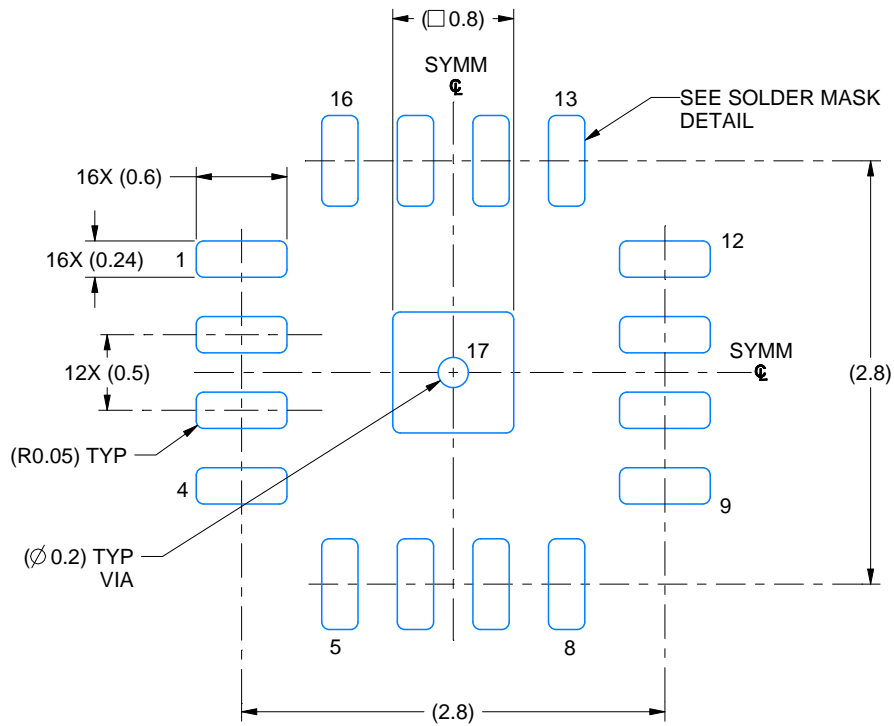

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 20X



4219118/A 11/2018

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RTE0016D

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

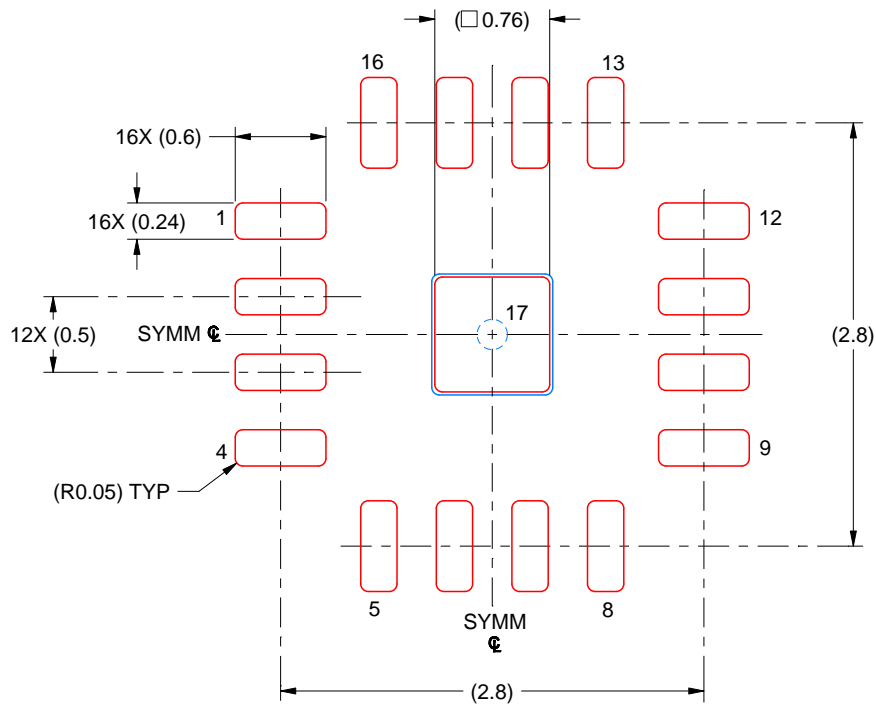

SOLDER PASTE EXAMPLE  
BASED ON 0.125 MM THICK STENCIL  
SCALE: 20X


EXPOSED PAD 17  
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4219118/A 11/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


YZF0016



PACKAGE OUTLINE

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

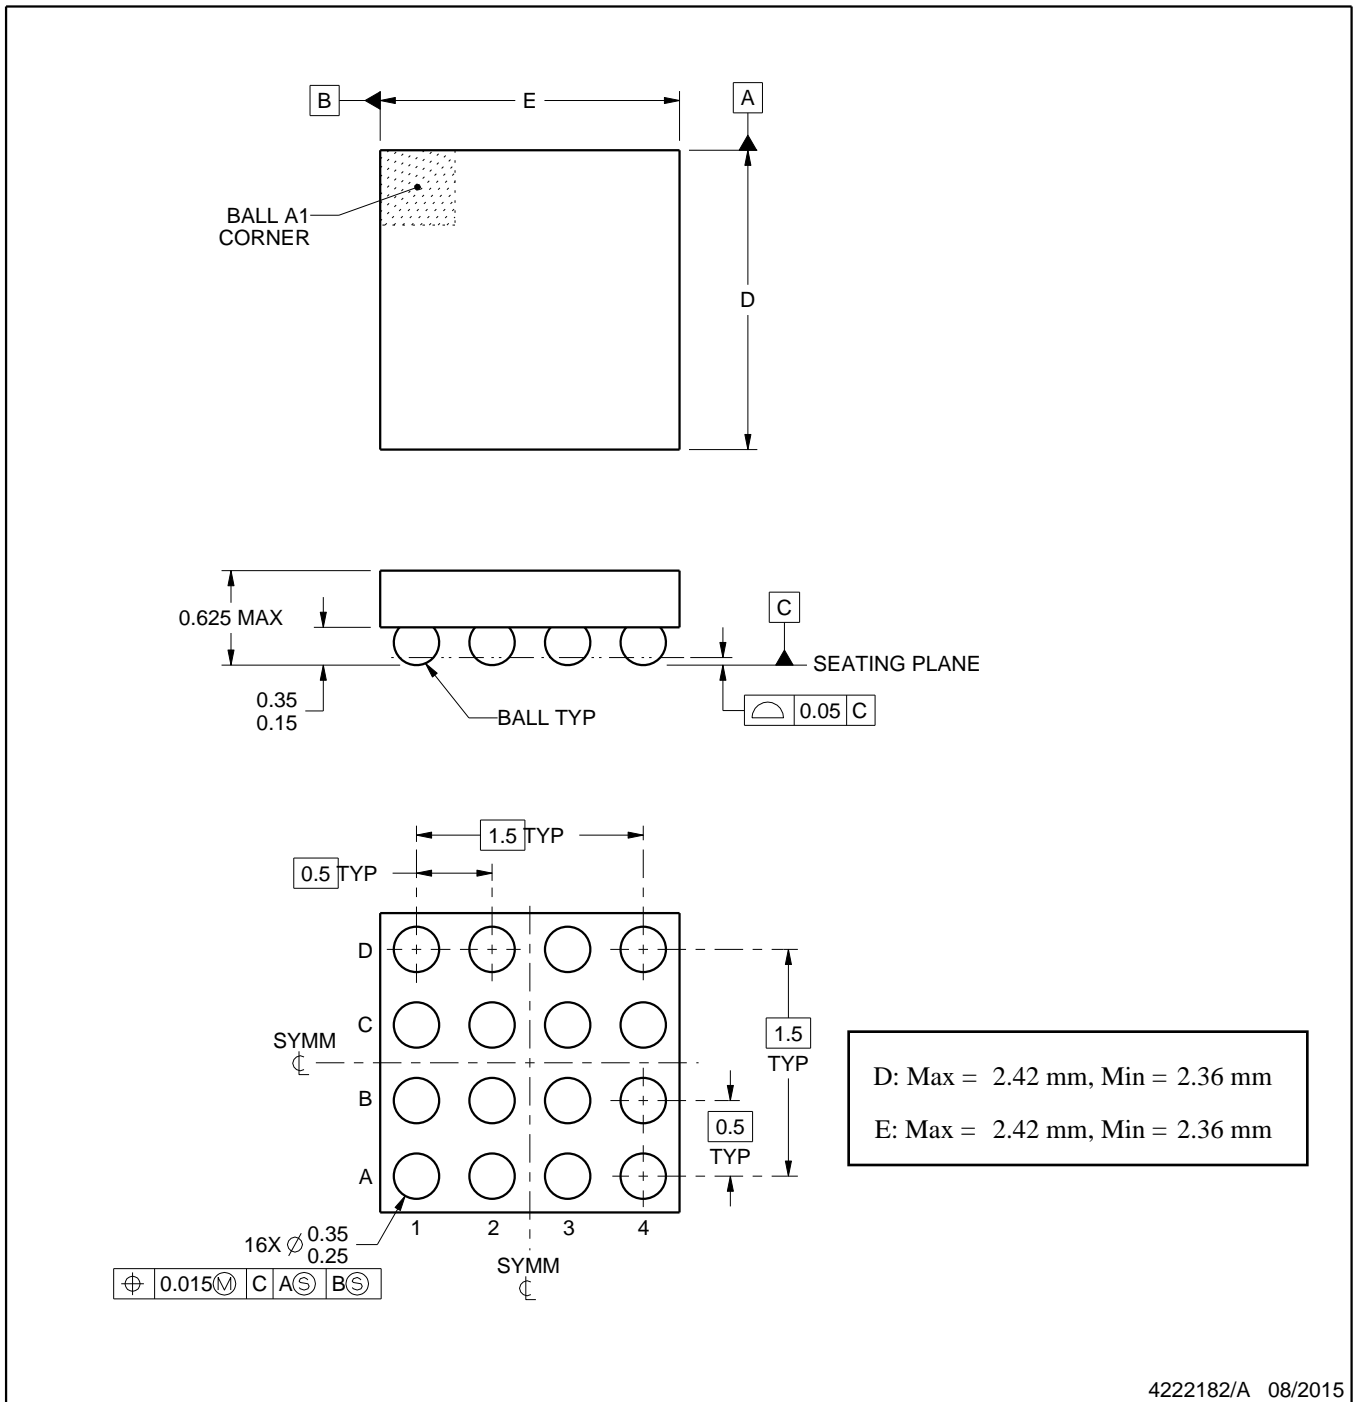

4222182/A 08/2015

NOTES:

NanoFree is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. NanoFree™ package configuration.

# EXAMPLE BOARD LAYOUT


YZF0016

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

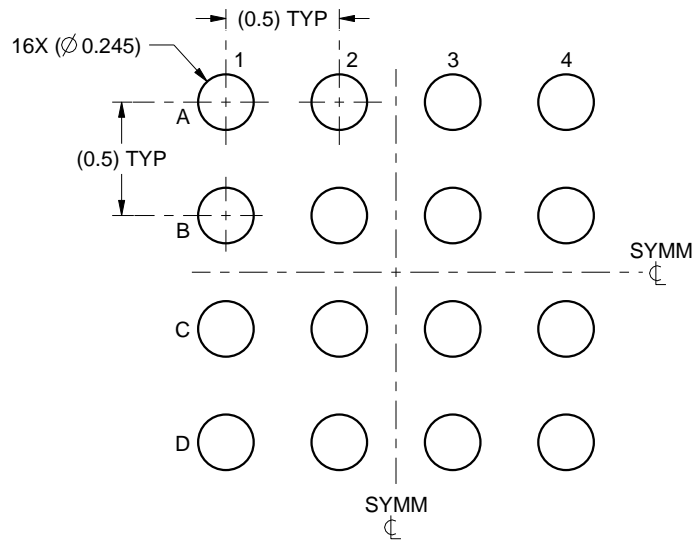

LAND PATTERN EXAMPLE  
SCALE:30X

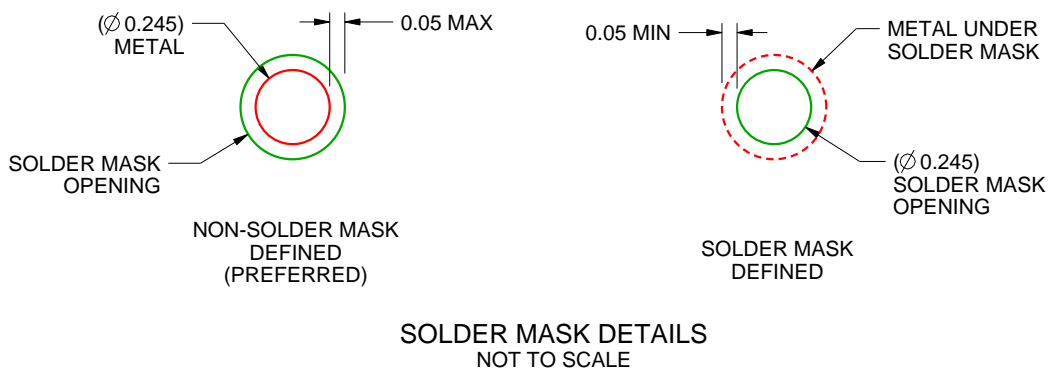

SOLDER MASK DETAILS  
NOT TO SCALE

4222182/A 08/2015

NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).




# EXAMPLE STENCIL DESIGN

YZF0016

DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

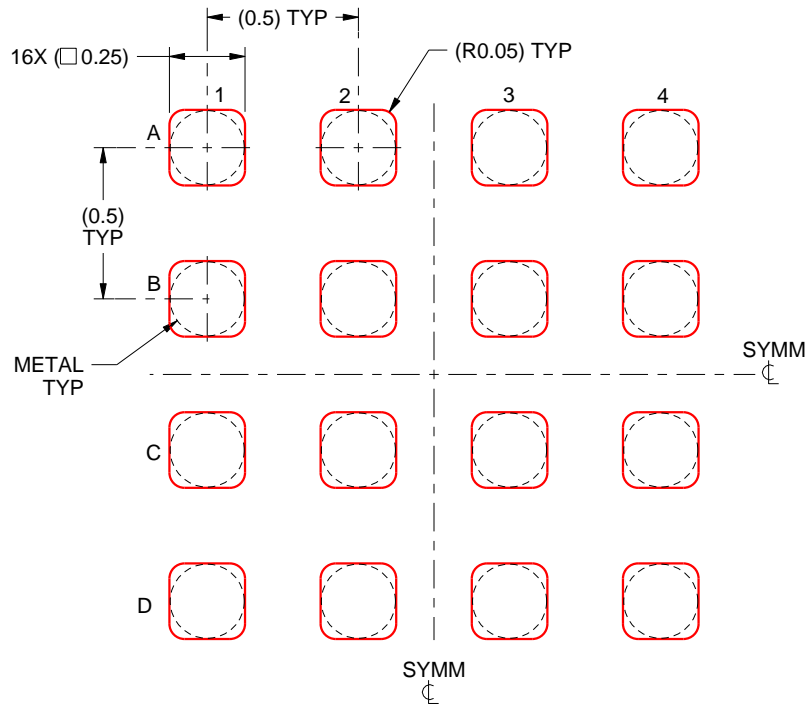

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:40X

4222182/A 08/2015

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2024，德州仪器 (TI) 公司