OPAx863A 105MHz、轨到轨输入/输出高精度放大器

1 特性

- 增益带宽积：50MHz
- 高精度：
  - 输入失调电压：95μV（最大值）
  - 温漂：1.2μV/°C（最大值）
- 低功耗：
  - 静态电流：800μA/通道（典型值）
  - 电源电压：2.7V 至 12.6V
- 输入电压噪声：6.3nV/√Hz
- 压摆率：100V/μs
- 轨到轨输入和输出
- HD_2 和 HD_3：
  - 20kHz ($2V_{PP}$) 时为 -129dBc 和 -138dBc
- 工作温度范围：-40°C 至 +125°C
- 其他特性：
  - 过载功率限制
  - 输出短路保护

2 应用

- 低功耗 SAR 和 Δ-Σ ADC 驱动器
- ADC 基准缓冲器
- 低侧电流检测
- 光电二极管 TIA 接口
- 电感式传感
- 电池供电仪表
- 增益和有源滤波器级

3 说明

OPA863A 和 OPA2863A 器件 (OPAx863A) 是单位增益稳定的低功耗、轨到轨输入和输出、电压反馈运算放大器。这些器件经过封装调整，可提供高精度性能，最大输入失调电压为 95μV，温漂为 1.2μV/℃，可在整个温度范围内实现高精度测量。

OPAx863A 每通道仅消耗 800μA 电流，可提供 50MHz 的增益带宽积、100V/μs 的压摆率和 6.3nV/√Hz 的电压噪声密度。由 2.7V 电源供电的轨到轨输入级适用于便携式电池供电型应用。轨到轨输入级可在整个输入共模电压范围内很好地匹配增益带宽积和噪声，从而在宽输入动态范围内实现出色的性能。

OPAx863A 包括过载功率限制功能，可限制输出饱和时 I_Q 的增加，从而避免电池供电的功率敏感型系统中出现过度功率耗散。输出级具有短路保护功能，使得此类器件可适应恶劣的环境。

器件信息

器件型号(1)	通道数	封装(2)
OPA863A	单通道	DBV（SOT-23，5）
OPA2863A	双通道	D（SOIC，8）
		DGK（VSSOP，8）(3)
		DSN（USON，10）

(1) 请参阅节 4。
(2) 有关更多信息，请参阅节 11。
(3) 预发布信息（非量产数据）。

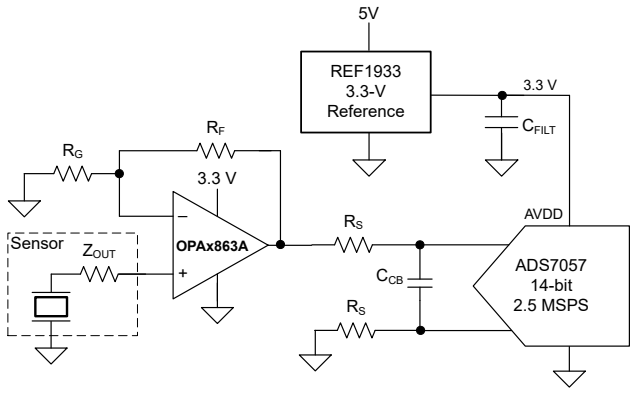

OPAx863A 用作精密 SAR ADC 输入驱动器

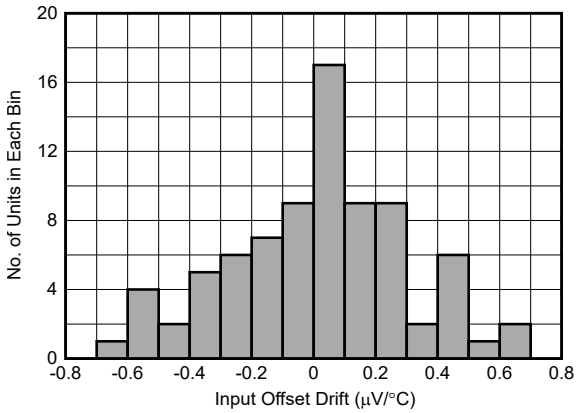

具有低输入失调电压漂移的精密性能

本资源的原文使用英文撰写。 为方便起见，TI 提供了译文；由于翻译过程中可能使用了自动化工具，TI 不保证译文的准确性。 为确认准确性，请务必访问 ti.com 参考最新的英文版本（控制文档）。

Table of Contents

1 特性 1
2 应用 1
3 说明 1
4 Device Comparison Table 2
5 Pin Configuration and Functions 3
6 Specifications 5
6.1 Absolute Maximum Ratings 5
6.2 ESD Ratings 5
6.3 Recommended Operating Conditions 5
6.4 Thermal Information OPA863A 6
6.5 Thermal Information OPA2863A 6
6.6 Electrical Characteristics V_S = ±5 V 7
6.7 Electrical Characteristics V_S = 3 V 10
6.8 Typical Characteristics: V_S = ±5 V 12
6.9 Typical Characteristics: V_S = 3 V 17
6.10 Typical Characteristics: V_S = 3 V to 10 V 19
7 Detailed Description 21
7.1 Overview 21
7.2 Functional Block Diagram 21
7.3 Feature Description 22
7.4 Device Functional Modes 23
8 Application and Implementation 24
8.1 Application Information 24
8.2 Typical Applications 24
8.3 Power Supply Recommendations 26
8.4 Layout 26
9 Device and Documentation Support 28
9.1 Documentation Support 28
9.2 接收文档更新通知 28
9.3 支持资源 28
9.4 Trademarks 28
9.5 静电放电警告 28
9.6 术语表 28
10 Revision History 28
11 Mechanical, Packaging, and Orderable Information 29

4 Device Comparison Table

DEVICE	±V_S (V)	I_Q/CHANNEL (mA)	GBWP (MHz)	SLEW RATE (V/µs)	VOLTAGE NOISE (nV/√Hz)	AMPLIFIER DESCRIPTION
OPAx863A	±6.3	0.80	50	100	6.3	Unity-gain stable RRIO bipolar amplifier
LMH6643	±6.4	2.7	65	130	17	Unity-gain stable NRI/RRO bipolar amplifier
OPA810	±13.5	3.6	70	200	6.3	Unity-gain stable RRIO FET-input amplifier
OPA837	±2.7	0.6	50	105	4.7	Unity-gain stable NRI/RRO bipolar amplifier
OPA607	±2.75	0.9	50	24	3.8	Decompensated gain of 6 V/V stable CMOS amplifier

Copyright © 2024 Texas Instruments Incorporated

5 Pin Configuration and Functions

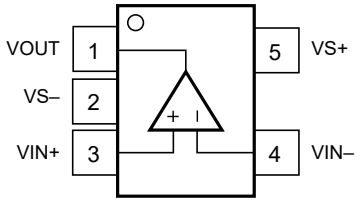

图 5-1. OPA863A DBV Package, 5-Pin SOT-23 (Top View)

表 5-1. Pin Functions: OPA863A

PIN		TYPE	DESCRIPTION
NAME	NO.		
VIN+	3	Input	Noninverting input pin
VIN –	4	Input	Inverting input pin
VOUT	1	Output	Output pin
VS –	2	Power	Negative power-supply pin
VS+	5	Power	Positive power-supply pin

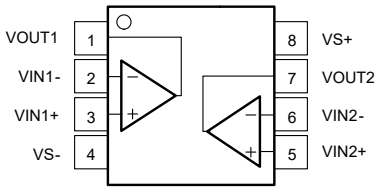

图 5-2. OPA2863A D Package, 8-Pin SOIC and DGK (Preview) Package, 8-Pin VSSOP (Top View)

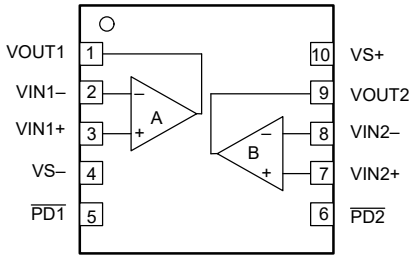

图 5-3. OPA2863A DSN Package, 10-Pin USON With Exposed Thermal Pad (Top View)

表 5-2. Pin Functions: OPA2863A

PIN			TYPE	DESCRIPTION
NAME	NO.			
	D (SOIC), DGK (VSSOP)	DSN (USON)		
PD1	—	5	Input	Amplifier 1 power down. Low = disabled, high = enabled
PD2	—	6	Input	Amplifier 2 power down. Low = disabled, high = enabled
VIN1 –	2	2	Input	Amplifier 1 inverting input pin
VIN1+	3	3	Input	Amplifier 1 noninverting input pin
VIN2 –	6	8	Input	Amplifier 2 inverting input pin
VIN2+	5	7	Input	Amplifier 2 noninverting input pin
VOUT1	1	1	Output	Amplifier 1 output pin
VOUT2	7	9	Output	Amplifier 2 output pin
VS –	4	4	Power	Negative power-supply pin
VS+	8	10	Power	Positive power-supply pin

Copyright © 2024 Texas Instruments Incorporated

表 5-2. Pin Functions: OPA2863A（续）

PIN			TYPE	DESCRIPTION
NAME	NO.			
	D (SOIC), DGK (VSSOP)	DSN (USON)		
Thermal pad	—	Thermal pad	—	Thermal pad. Electrically isolated from the device. Connect to a heat-spreading plane, typically ground.

Copyright © 2024 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
V_{S-} to V_{S+}	Supply voltage		13	V
	Supply turn-on/off maximum dV/dt		1	V/µs
V_I	Input voltage	V_{S-} – 0.5	V_{S+} + 0.5	V
V_{ID}	Differential input voltage		±1	V
I_I	Continuous input current(2)		±10	mA
I_O	Continuous output current(3)		±30	mA
	Continuous power dissipation	See *Thermal Information*		
T_J	Junction temperature		150	°C
T_A	Operating ambient temperature	–40	125	°C
T_{stg}	Storage temperature	–65	150	°C

(1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) Continuous input current limit for both the ESD diodes to the supply pins and amplifier differential input clamp diode. The differential input clamp diodes limit the voltage between the two inputs to 1 V with this continuous input current flowing through these diodes.
(3) Long-term continuous current for electromigration limits.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002(2)	±1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{S-} to V_{S+}	Total supply voltage	2.7	10	12.6	V
T_A	Ambient temperature	–40	25	125	°C

Copyright © 2024 Texas Instruments Incorporated

6.4 Thermal Information OPA863A

THERMAL METRIC(1)		OPA863A DBV (SOT-23) 5 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	191.0	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	122.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	91.6	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	65.5	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	91.3	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

6.5 Thermal Information OPA2863A

THERMAL METRIC(1)		OPA2863A D (SOIC) 8 PINS	OPA2863A DGK (VSSOP) 8 PINS	OPA2863A DSN (USON) 10 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	120.0	180.3	52.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	63.3	67.5	41.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	63.2	101.9	25.5	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	17.2	9.8	0.6	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	62.5	100.1	25.5	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	N/A	8.1	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2024 Texas Instruments Incorporated

6.6 Electrical Characteristics V_S = ±5 V

at G = 1 V/V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, input and output common-mode is at mid-supply, and T_A ≅ 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
AC PERFORMANCE						
SSBW	Small-signal bandwidth	V_{OUT} = 20 mV_{PP}, G = 1		105		MHz
GBWP	Gain-bandwidth product			50		MHz
LSBW	Large-signal bandwidth	V_{OUT} = 2 V_{PP}		14		MHz
	Bandwidth for 0.1-dB flatness	V_{OUT} = 20 mV_{PP}		15		MHz
SR	Slew rate	V_{OUT} = 2-V step		100		V/µs
	Rise, fall time	V_{OUT} = 200-mV step		9		ns
	Settling time	To 0.1%, V_{OUT} = 2-V step		50		ns
		To 0.01%, V_{OUT} = 2-V step		70		
	Overshoot and undershoot	V_{OUT} = 2-V step		1		%
	Overdrive recovery time	G = –1, 0.5-V overdrive beyond supplies		70		ns
		G = 1, 0.5-V overdrive beyond supplies		90		
HD2	Second-order harmonic distortion	f = 20 kHz, V_{OUT} = 2 V_{PP}		–129		dBc
HD3	Third-order harmonic distortion	f = 20 kHz, V_{OUT} = 2 V_{PP}		–138		dBc
HD2	Second-order harmonic distortion	f = 100 kHz, V_{OUT} = 2 V_{PP}		–107		dBc
HD3	Third-order harmonic distortion	f = 100 kHz, V_{OUT} = 2 V_{PP}		–125		dBc
e_N	Input voltage noise			6.3		nV/√Hz
i_N	Input current noise			0.5		pA/√Hz
	Closed-loop output impedance	f = 1 MHz		0.2		Ω
	Channel-to-channel crosstalk	f = 1 MHz, V_{OUT} = 2 V_{PP}		–120		dBc
DC PERFORMANCE						
A_{OL}	Open-loop voltage gain	V_{OUT} = ±2.5 V	110	128		dB
V_{OS}	Input-referred offset voltage		–95	±10	95	µV
	Input offset voltage drift	T_A = –40°C to +125°C	–1.2	±0.3	1.2	µV/°C
	Input bias current	T_A ≅ 25°C		0.3	0.73	µA
		T_A = –40°C to +85°C			1.2	
		T_A = –40°C to +125°C			1.6	
	Input bias current drift	T_A = –40°C to +125°C		±3		nA/°C
	Input offset current		–30	±10	30	nA
INPUT						
	Input common-mode voltage		V_{S-} – 0.2		V_{S+}+0.2	V
CMRR	Common-mode rejection ratio	V_{CM} = V_{S-} – 0.2 V to V_{S+} – 1.6 V	95	120		dB
	Input impedance common-mode			650 || 0.8		MΩ || pF
	Input impedance differential mode			200 || 0.5		kΩ || pF
OUTPUT						
V_{OL}	Output voltage, low	T_A ≅ 25°C		V_{S-}+0.14	V_{S-}+0.2	V
		T_A = –40°C to +125°C		V_{S-}+0.15	V_{S-}+0.22	
V_{OH}	Output voltage, high	T_A ≅ 25°C	V_{S+} – 0.2	V_{S+} – 0.14		V
		T_A = –40°C to +125°C	V_{S+} – 0.2	V_{S+} – 0.15		
	Linear output drive (sourcing and sinking)	V_{OUT} = ±2.5 V, ΔV_{OS} < 1 mV(1)	23	30		mA

Copyright © 2024 Texas Instruments Incorporated

6.6 Electrical Characteristics V_S = ±5 V（续）

at G = 1 V/V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, input and output common-mode is at mid-supply, and T_A ≅ 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Short-circuit current			45		mA

Copyright © 2024 Texas Instruments Incorporated

6.6 Electrical Characteristics V_S = ±5 V （续）

at G = 1 V/V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, input and output common-mode is at mid-supply, and T_A ≅ 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUPPLY						
I_Q	Quiescent current per amplifier	T_A ≈ 25°C		800	925	µA
		T_A = –40°C to +125°C			1040	
PSRR	Power-supply rejection ratio	ΔV_S = ±2 V(2)	100	120		dB
POWER DOWN						
	Enable voltage threshold	Specified *on* when > V_{S+} – 0.5 V			4.5	V
	Disable voltage threshold	Specified *off* when < V_{S+} – 1.5 V	3.5			V
	Power-down quiescent current per channel	$V_{\overline{PD}}$ ≤ V_{S+} – 1.5 V		11	28	µA
		$V_{\overline{PD}}$ ≤ V_{S+} – 1.5 V, T_A = –40°C to +125°C			35	
	Power-down pin bias current			1	2.5	µA
	Turn-on time delay			8		µs
	Turn-off time delay			3.5		µs
AUXILIARY INPUT STAGE						
	Gain-bandwidth product			50		MHz
	Input voltage noise			6.3		nV/√Hz
	Input current noise			0.5		pA/√Hz
	Input-referred offset voltage		–95	±10	95	µV
	Input bias current	T_A ≅ 25°C		0.2	0.6	µA
		T_A = –40°C to +125°C		0.2	1.3	
	Common-mode rejection ratio	V_{CM} = 4.1 V to 5.2 V		120		dB
	Power supply rejection ratio	ΔV_S = ±0.6 V		120		dB

(1) Change in input offset voltage from no-load condition.
(2) Change in supply voltage from the default test condition with only one of the positive or negative supplies changing corresponding to +PSRR and –PSRR.

Copyright © 2024 Texas Instruments Incorporated

6.7 Electrical Characteristics V_S = 3 V

at G = 1 V/V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ connected to 1 V, input and output V_{CM} = 1 V, and T_A ≅ 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
AC PERFORMANCE						
SSBW	Small-signal bandwidth	V_{OUT} = 20 mV_{PP}, G = 1		85		MHz
GBWP	Gain-bandwidth product			50		MHz
LSBW	Large-signal bandwidth	V_{OUT} = 1 V_{PP}		23		MHz
	Bandwidth for 0.1-dB flatness	V_{OUT} = 20 mV_{PP}		10		MHz
SR	Slew rate	V_{OUT} = 1-V step		53		V/µs
	Rise, fall time	V_{OUT} = 200-mV step		10		ns
	Settling time	To 0.1%, V_{OUT} = 1-V step		58		ns
		To 0.01%, V_{OUT} = 1-V step		90		
	Overshoot	V_{OUT} = 1-V step		2		%
	Undershoot	V_{OUT} = 1-V step		16		%
	Overdrive recovery time	G = –1, 0.5-V overdrive beyond supplies		85		ns
		G = 1, 0.5-V overdrive beyond supplies		130		
HD2	Second-order harmonic distortion	f = 20 kHz, V_{OUT} = 1 V_{PP}		–123		dBc
HD3	Third-order harmonic distortion	f = 20 kHz, V_{OUT} = 1 V_{PP}		–132		dBc
HD2	Second-order harmonic distortion	f = 100 kHz, V_{OUT} = 1 V_{PP}		–109		dBc
HD3	Third-order harmonic distortion	f = 100 kHz, V_{OUT} = 1 V_{PP}		–129		dBc
e_N	Input voltage noise			6.3		nV/√Hz
i_N	Input current noise			0.5		pA/√Hz
	Closed-loop output impedance	f = 1 MHz		0.2		Ω
	Channel-to-channel crosstalk	f = 1 MHz, V_{OUT} = 1 V_{PP}		–120		dBc
DC PERFORMANCE						
A_{OL}	Open-loop voltage gain	V_{OUT} = 1 V to 2 V	104	123		dB
V_{OS}	Input-referred offset voltage		–95	±10	95	µV
	Input offset voltage drift	T_A = –40°C to +125°C	–1.2	±0.3	1.2	µV/°C
	Input bias current	T_A ≅ 25°C		0.3	0.73	µA
		T_A = –40°C to +85°C			1.2	
		T_A = –40°C to +125°C			1.56	
	Input bias current drift	T_A = –40°C to +125°C		±3		nA/°C
	Input offset current		–30	±10	30	nA
INPUT						
	Input common-mode voltage		V_{S-} – 0.2		V_{S+}+0.2	V
CMRR	Common-mode rejection ratio	V_{CM} = V_{S-} – 0.2 V to V_{S+} – 1.6 V	92	115		dB
	Input impedance common-mode			360 || 0.9		MΩ || pF
	Input impedance differential mode			200 || 0.5		kΩ || pF
OUTPUT						
V_{OL}	Output voltage, low	T_A ≅ 25°C		V_{S-} + 0.13	V_{S-} + 0.15	V
		T_A = –40°C to +125°C		V_{S-} + 0.13	V_{S-} + 0.16	
V_{OH}	Output voltage, high	T_A ≅ 25°C	V_{S+} – 0.15	V_{S+} – 0.13		V
		T_A = –40°C to +125°C	V_{S+} – 0.15	V_{S+} – 0.13		

Copyright © 2024 Texas Instruments Incorporated

6.7 Electrical Characteristics V_S = 3 V（续）

at G = 1 V/V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ connected to 1 V, input and output V_{CM} = 1 V, and T_A ≅ 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Linear output drive (sourcing and sinking)	V_{OUT} = ±0.7 V, ΔV_{OS} < 1 mV(1)	23	33		mA
	Short-circuit current			45		mA
POWER SUPPLY						
I_Q	Quiescent current per amplifier	$T_A \approx$ 25°C		770	890	µA
		T_A = –40°C to +125°C			995	
PSRR	Power-supply rejection ratio	ΔV_S = ±1 V(2)	100	120		dB
POWER DOWN						
	Enable voltage threshold	Specified *on* when > V_{S+} – 0.5 V			2.5	V
	Disable voltage threshold	Specified *off* when < V_{S+} – 1.5 V	1.5			V
	Power-down quiescent current per channel	$V_{\overline{PD}} \leqslant V_{S+}$ – 1.5 V		8.5	20	µA
		$V_{\overline{PD}} \leqslant V_{S+}$ – 1.5 V, T_A = –40°C to +125°C			30	
	Power-down pin bias current			1	2.5	µA
	Turn-on time delay			8		µs
	Turn-off time delay			3.5		µs
AUXILIARY INPUT STAGE						
	Gain-bandwidth product			50		MHz
	Input voltage noise			6.3		nV/√Hz
	Input current noise			0.5		pA/√Hz
	Input-referred offset voltage		–95	±10	95	µV
	Input bias current	T_A ≅ 25°C		0.2	0.6	µA
		T_A = –40°C to +125°C		0.4	1.2	
	Common-mode rejection ratio	V_{CM} = 2.1 V to 3.2 V		115		dB
	Power supply rejection ratio	ΔV_S = ±0.6 V		115		dB

(1) Change in input offset voltage from no-load condition.
(2) Change in supply voltage from the default test condition with only one of the positive or negative supplies changing corresponding to +PSRR and –PSRR.

Copyright © 2024 Texas Instruments Incorporated

6.8 Typical Characteristics: V_S = ±5 V

at V_{S+} = 5 V, V_{S-} = – 5 V, R_F = 0 Ω for G = 1 V/V; otherwise, R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

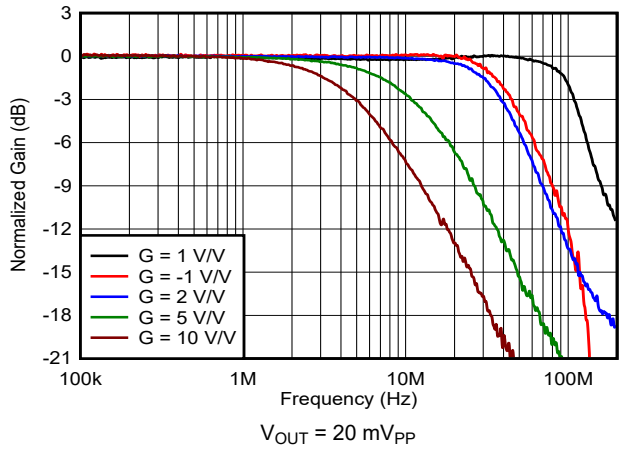

图 6-1. Small-Signal Frequency Response vs Gain

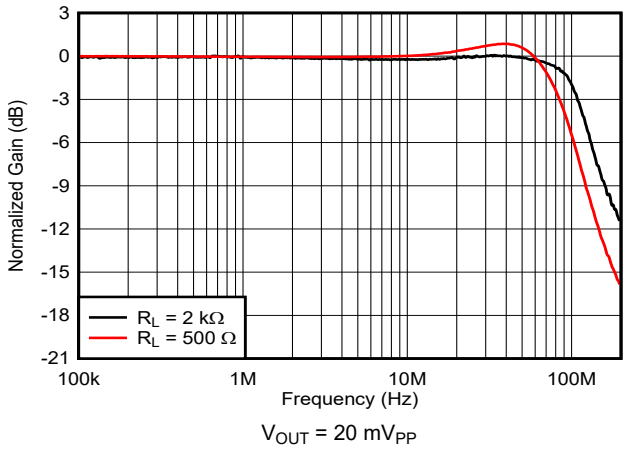

图 6-2. Small-Signal Frequency Response vs Output Load

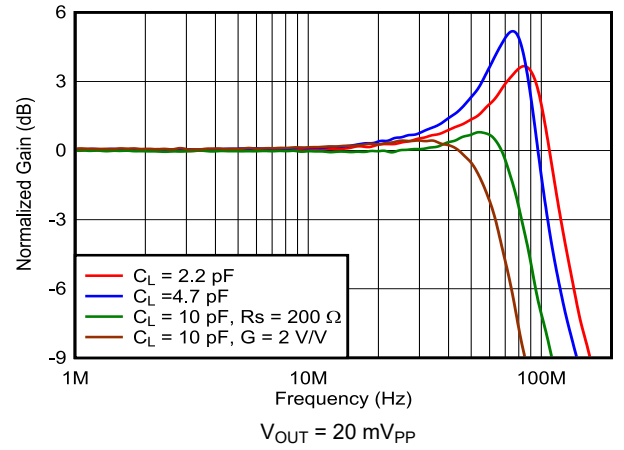

图 6-3. Frequency Response vs Load Capacitance

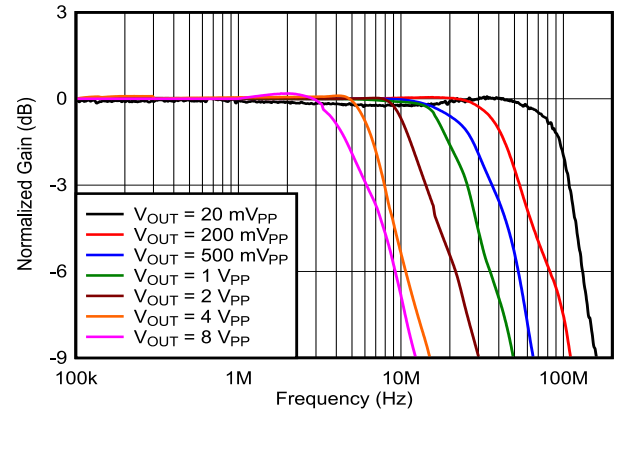

图 6-4. Frequency Response vs Output Voltage

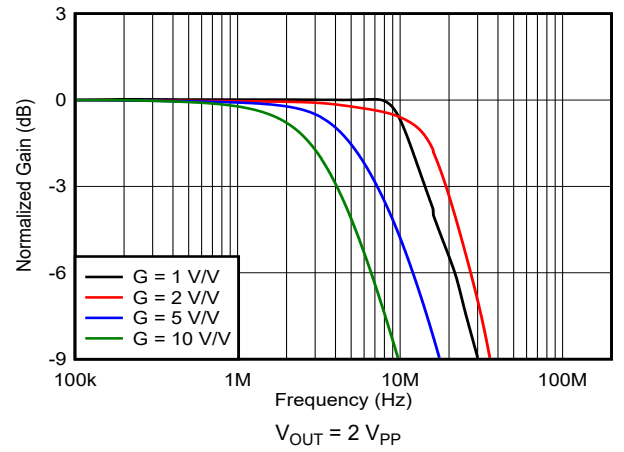

图 6-5. Large-Signal Frequency Response vs Gain

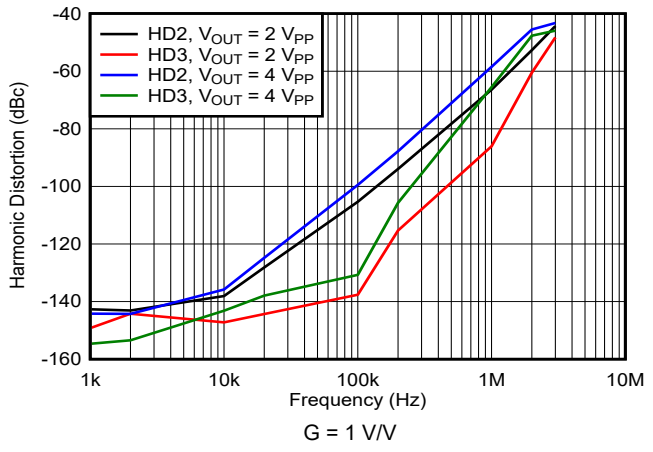

图 6-6. Harmonic Distortion vs Frequency

Copyright © 2024 Texas Instruments Incorporated

6.8 Typical Characteristics: V_S = ±5 V (continued)

at V_{S+} = 5 V, V_{S-} = – 5 V, R_F = 0 Ω for G = 1 V/V; otherwise, R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

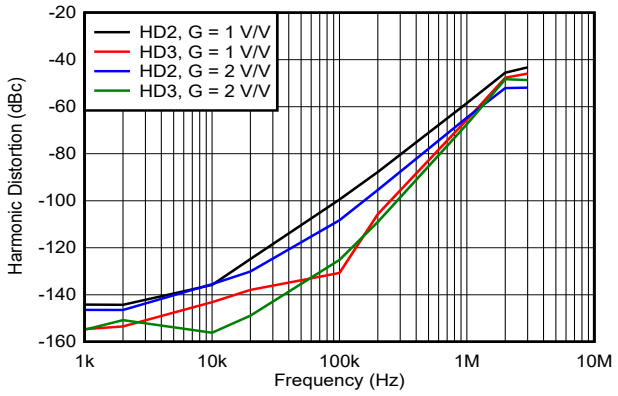

V_{OUT} = 4 V_{PP}

图 6-7. Harmonic Distortion vs Gain

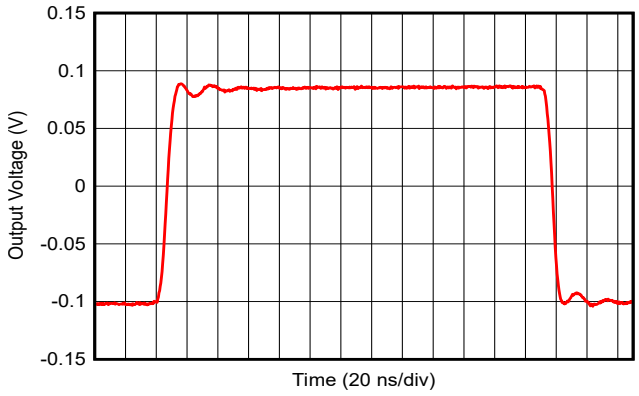

图 6-8. Small-Signal Transient Response

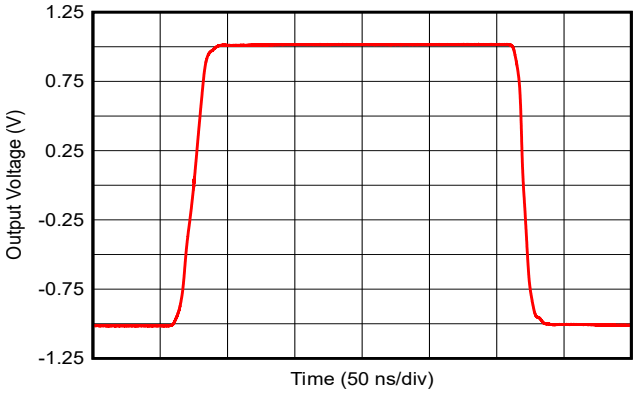

图 6-9. Large-Signal Transient Response

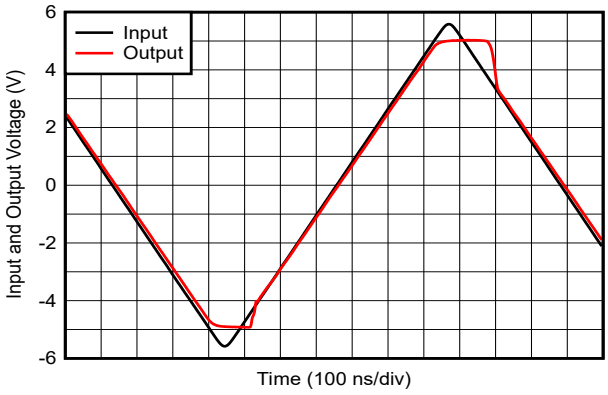

G = 1 V/V

图 6-10. Input Overdrive Recovery

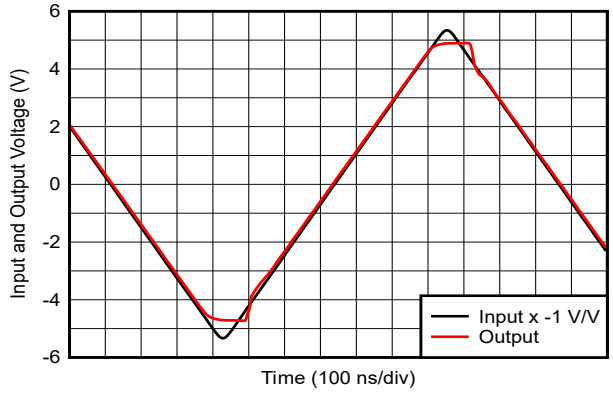

G = – 1 V/V

图 6-11. Output Overdrive Recovery

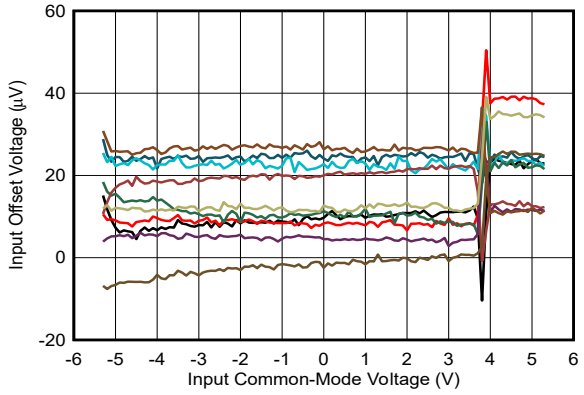

Measured for 10 units

图 6-12. Input Offset Voltage vs Input Common-Mode Voltage

Copyright © 2024 Texas Instruments Incorporated

6.8 Typical Characteristics: V_S = ±5 V (continued)

at V_{S+} = 5 V, V_{S-} = – 5 V, R_F = 0 Ω for G = 1 V/V; otherwise, R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

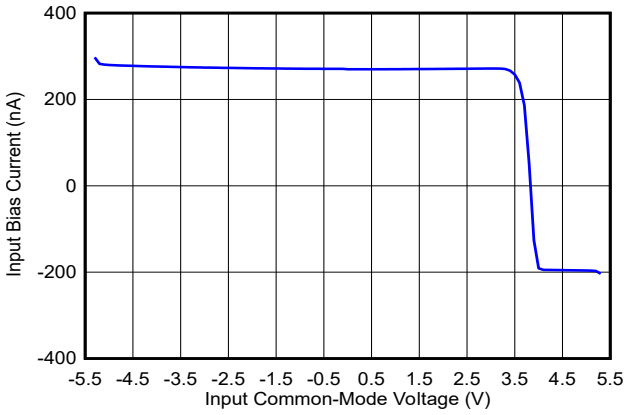

图 6-13. Input Bias Current vs Input Common-Mode Voltage

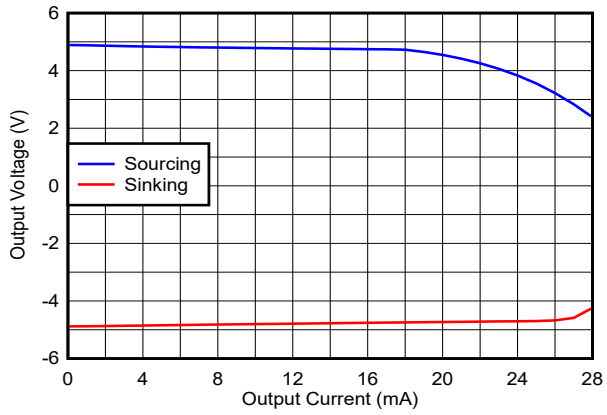

图 6-14. Output Voltage vs Load Current

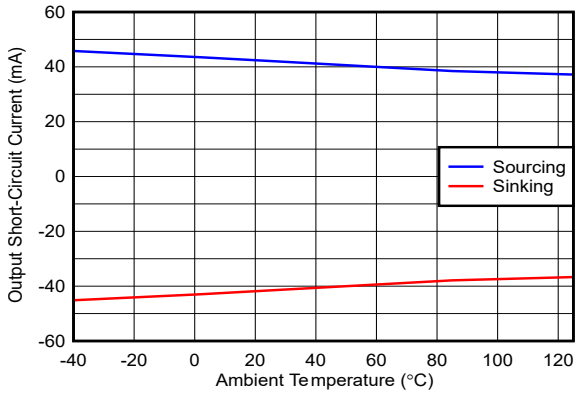

Output saturated and then short-circuited to opposite supply

图 6-15. Output Short-Circuit Current vs Ambient Temperature

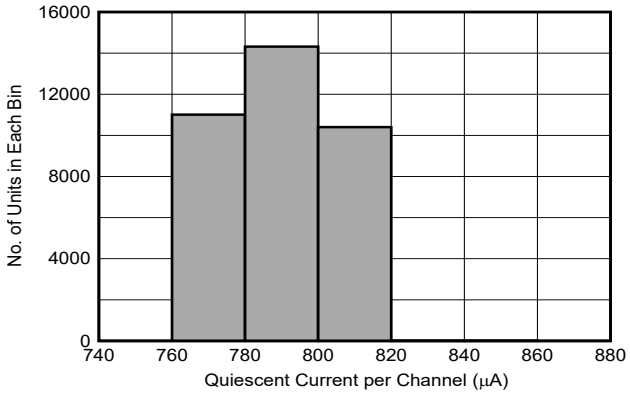

µ = 790 µA, σ = 13.8 µA

图 6-16. Quiescent Current Distribution

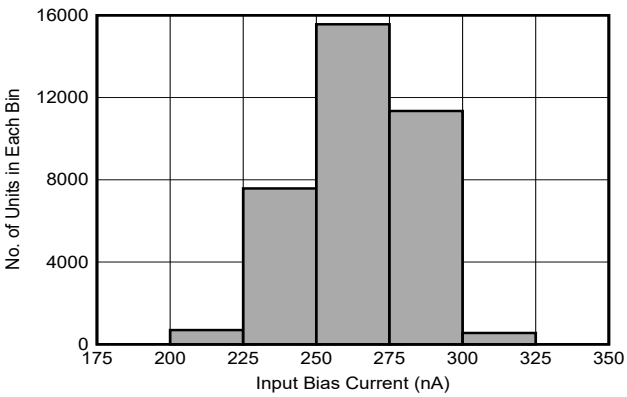

µ = 265 nA, σ = 18.6 nA

图 6-17. Input Bias Current Distribution

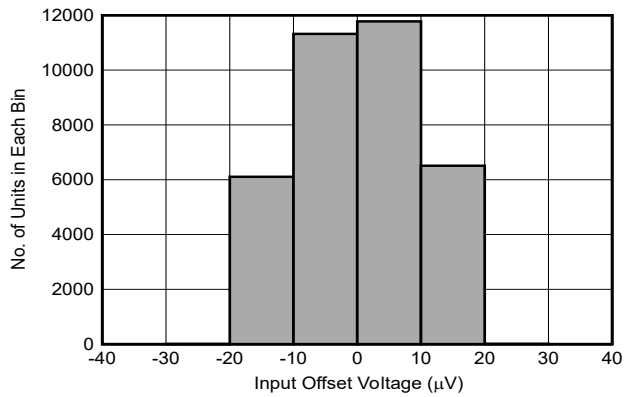

µ = 0.1 µV, σ = 9.1 µV

图 6-18. Input Offset Voltage Distribution

Copyright © 2024 Texas Instruments Incorporated

6.8 Typical Characteristics: V_S = ±5 V (continued)

at V_{S+} = 5 V, V_{S-} = – 5 V, R_F = 0 Ω for G = 1 V/V; otherwise, R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

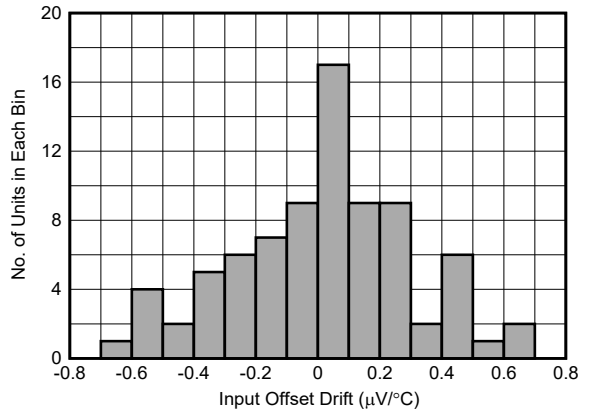

80 units, µ = 0.01 µV/°C, σ = 0.29 µV/°C, DSN package

图 6-19. Input Offset Voltage Drift Distribution

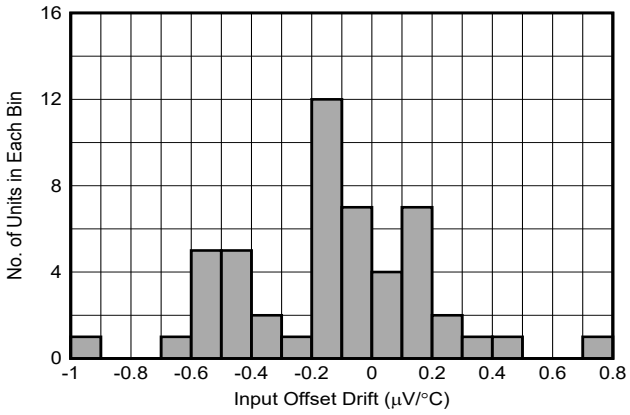

50 units, µ = – 0.12 µV/°C, σ = 0.31 µV/°C, DBV-5 package

图 6-20. Input Offset Voltage Drift Distribution

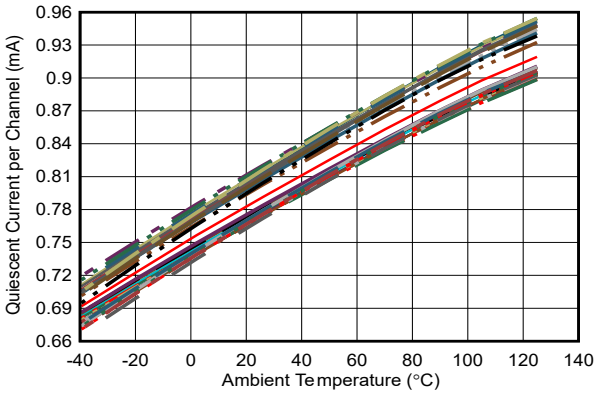

35 units

图 6-21. Quiescent Current vs Ambient Temperature

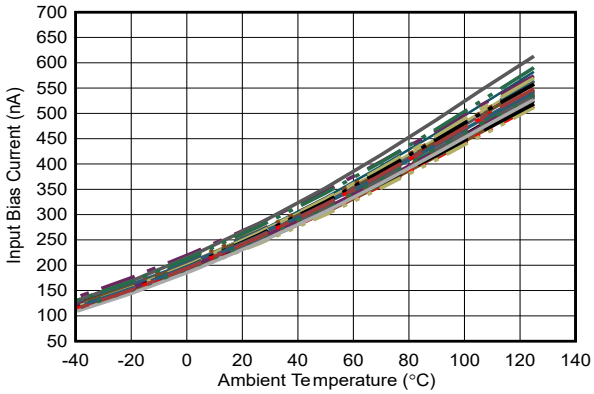

35 units

图 6-22. Input Bias Current vs Ambient Temperature

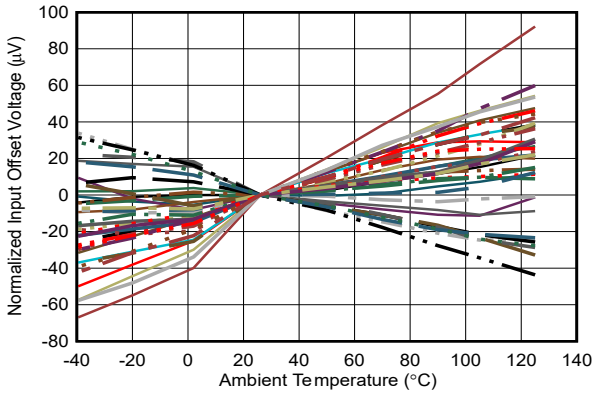

Normalized to 25°C values, 35 units, DSN package

图 6-23. Input Offset Voltage vs Ambient Temperature

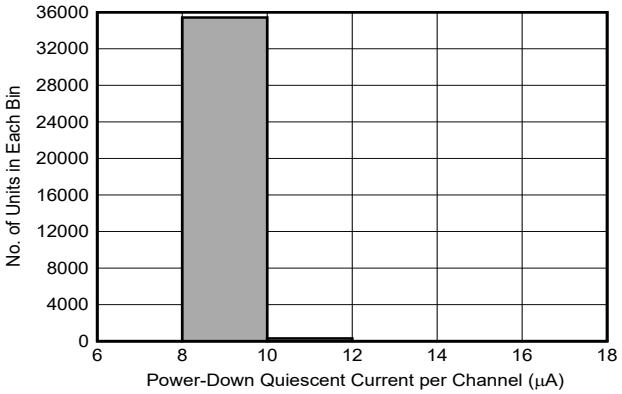

µ = 9.3 µA, σ = 0.32 µA

图 6-24. Power-Down Quiescent Current Distribution

Copyright © 2024 Texas Instruments Incorporated

6.8 Typical Characteristics: V_S = ±5 V (continued)

at V_{S+} = 5 V, V_{S-} = – 5 V, R_F = 0 Ω for G = 1 V/V; otherwise, R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

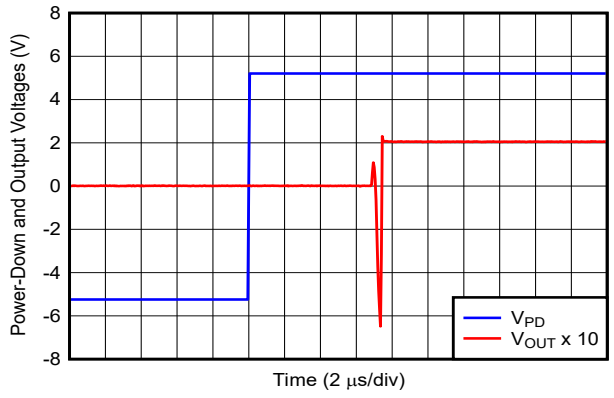

图 6-25. Turn-On Time to DC Input

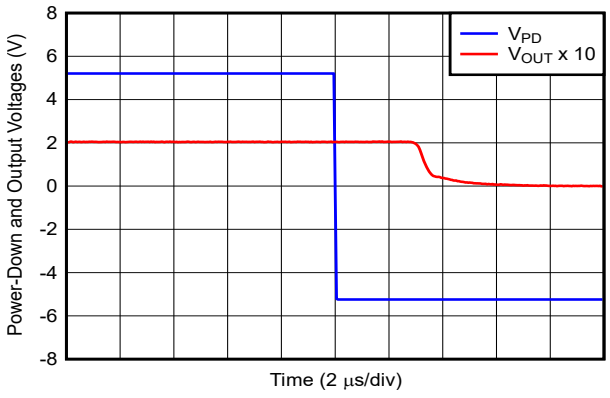

图 6-26. Turn-Off Time to DC Input

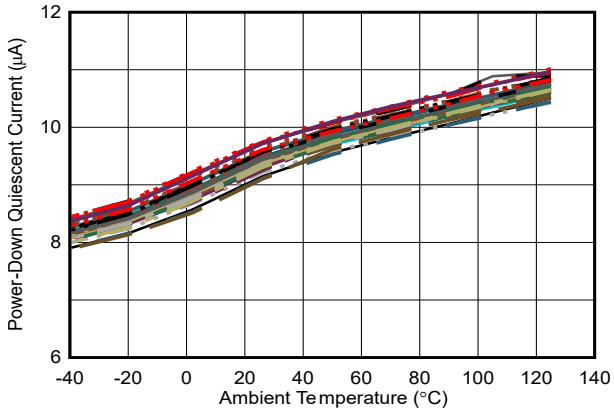

图 6-27. Power-Down I_Q vs Ambient Temperature

Copyright © 2024 Texas Instruments Incorporated

6.9 Typical Characteristics: V_S = 3 V

at V_{S+} = 3 V, V_{S-} = 0 V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ connected to 1 V, G = 1 V/V, input and output V_{CM} = 1 V, and T_A ≅ 25°C (unless otherwise noted)

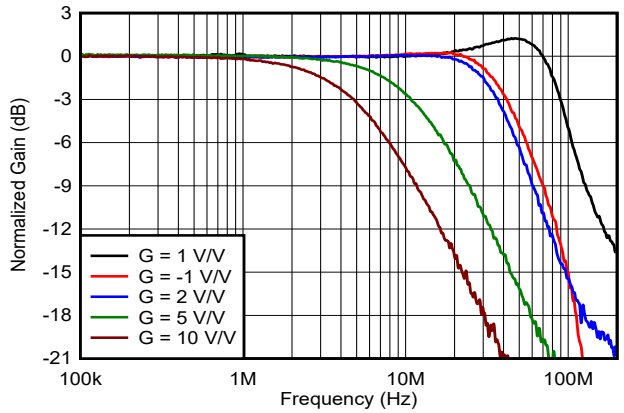

V_{OUT} = 20 mV_{PP}

图 6-28. Small-Signal Frequency Response vs Gain

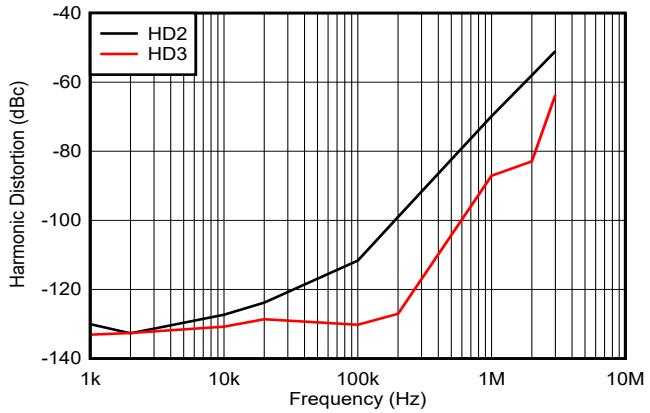

V_{OUT} = 1 V_{PP}

图 6-29. Harmonic Distortion vs Frequency

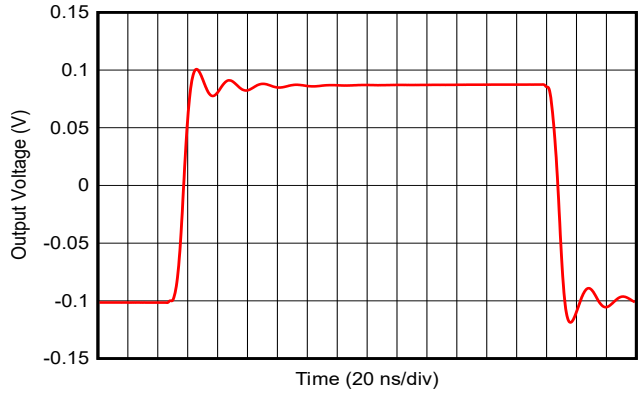

图 6-30. Small-Signal Transient Response

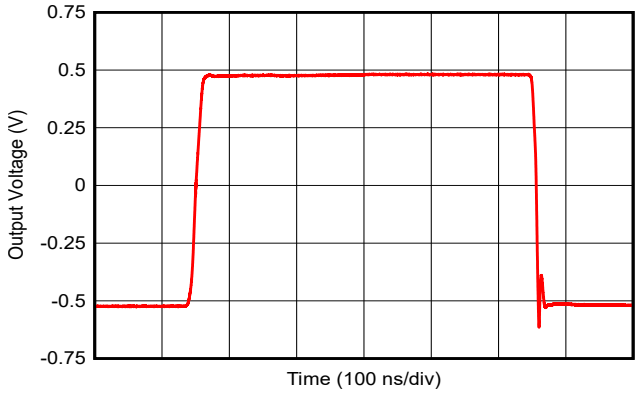

图 6-31. Large-Signal Transient Response

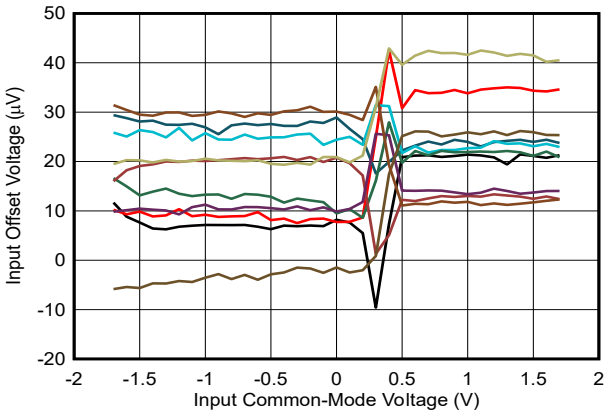

V_S = ±1.5 V, measured for 10 units

图 6-32. Input Offset Voltage vs Input Common-Mode Voltage

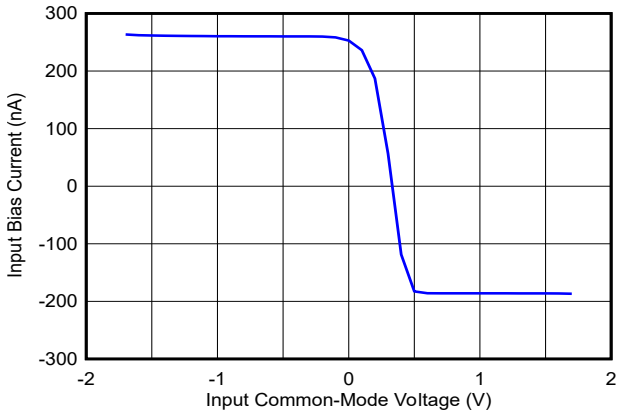

V_S = ±1.5 V

图 6-33. Input Bias Current vs Input Common-Mode Voltage

Copyright © 2024 Texas Instruments Incorporated

6.9 Typical Characteristics: V_S = 3 V (continued)

at V_{S+} = 3 V, V_{S-} = 0 V, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ connected to 1 V, G = 1 V/V, input and output V_{CM} = 1 V, and T_A ≅ 25°C (unless otherwise noted)

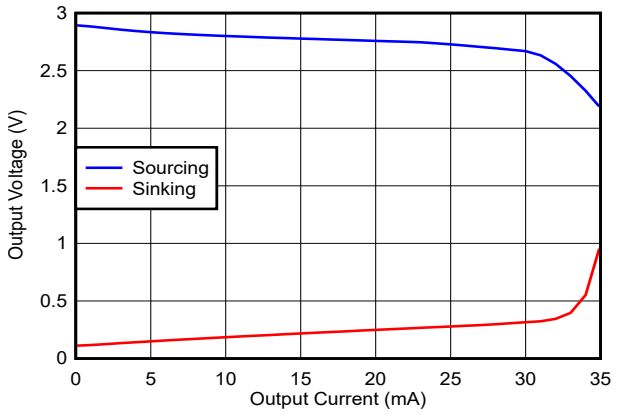

图 6-34. Output Voltage vs Load Current

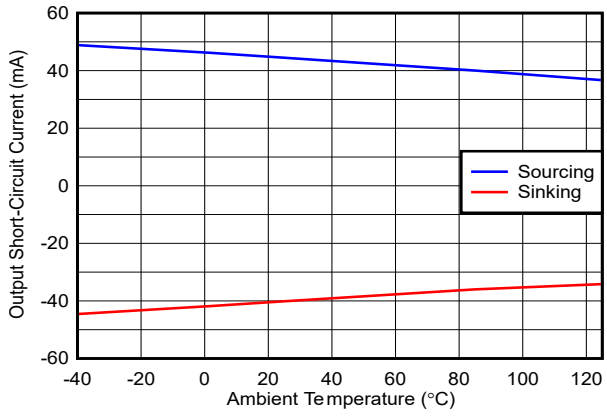

Output saturated and then short-circuited to other supply

图 6-35. Output Short-Circuit Current vs Ambient Temperature

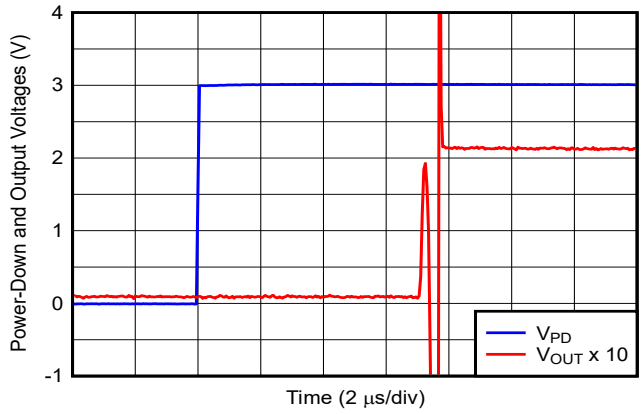

图 6-36. Turn-On Time to DC Input

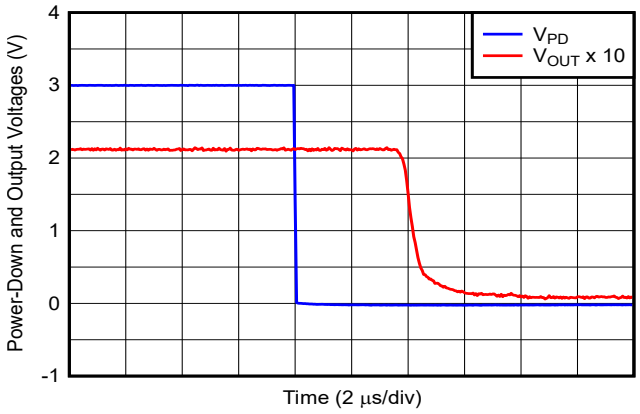

图 6-37. Turn-Off Time to DC Input

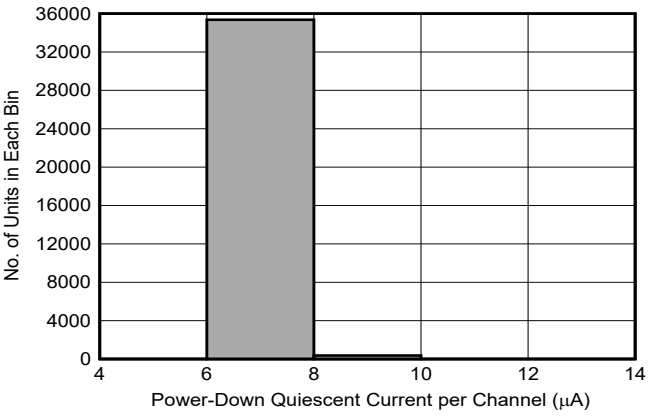

µ = 7.36 µA, σ = 0.29 µA

图 6-38. Power-Down Quiescent Current Distribution

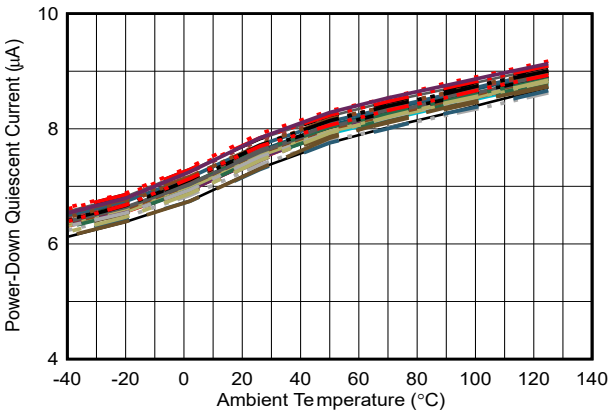

图 6-39. Power-Down I_Q vs. Ambient Temperature

Copyright © 2024 Texas Instruments Incorporated

6.10 Typical Characteristics: V_S = 3 V to 10 V

at V_{OUT} = 2 V_{PP}, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

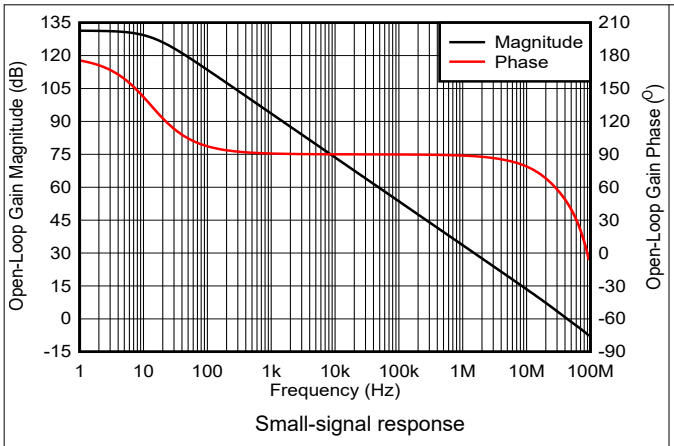

图 6-40. Open-Loop Gain and Phase vs Frequency

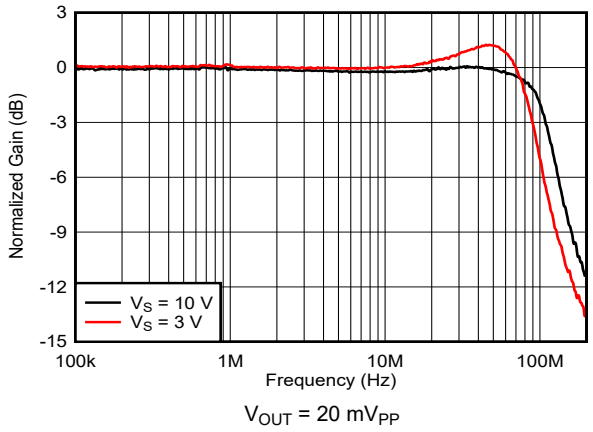

图 6-41. Frequency Response vs Supply Voltage

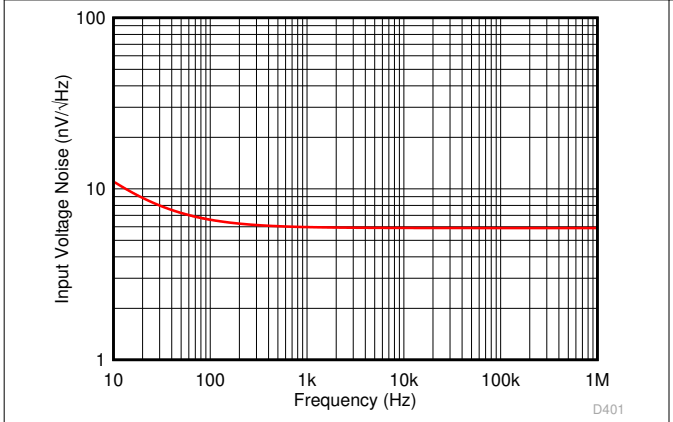

图 6-42. Input Voltage Noise Density vs Frequency

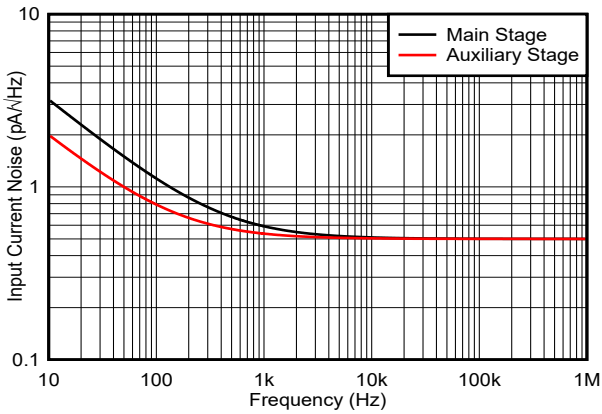

图 6-43. Input Current Noise Density vs Frequency

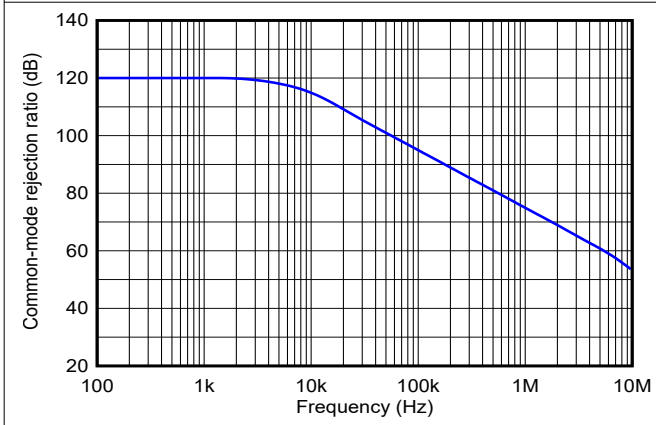

图 6-44. Common-Mode Rejection Ratio vs Frequency

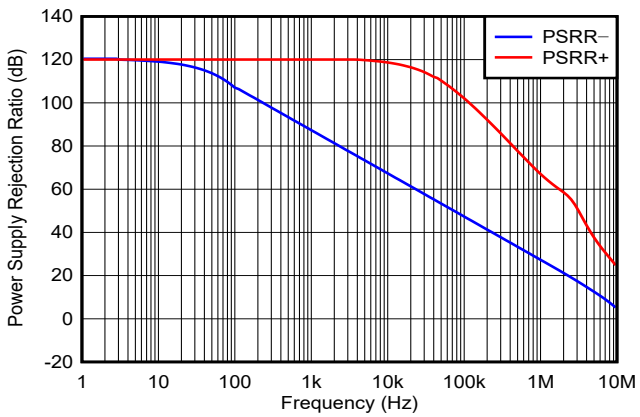

图 6-45. Power Supply Rejection Ratio vs Frequency

Copyright © 2024 Texas Instruments Incorporated

6.10 Typical Characteristics: V_S = 3 V to 10 V (continued)

at V_{OUT} = 2 V_{PP}, R_F = 0 Ω for G = 1 V/V, otherwise R_F = 1 kΩ for other gains, C_L = 1 pF, R_L = 2 kΩ referenced to mid-supply, G = 1 V/V, input and output referenced to mid-supply, and T_A ≅ 25°C (unless otherwise noted)

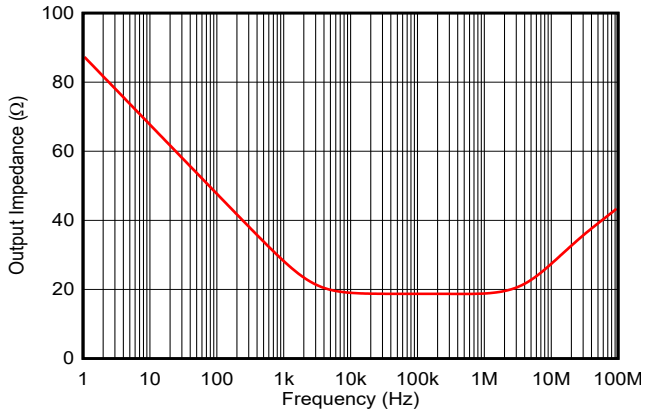

图 6-46. Open-Loop Output Impedance vs Frequency

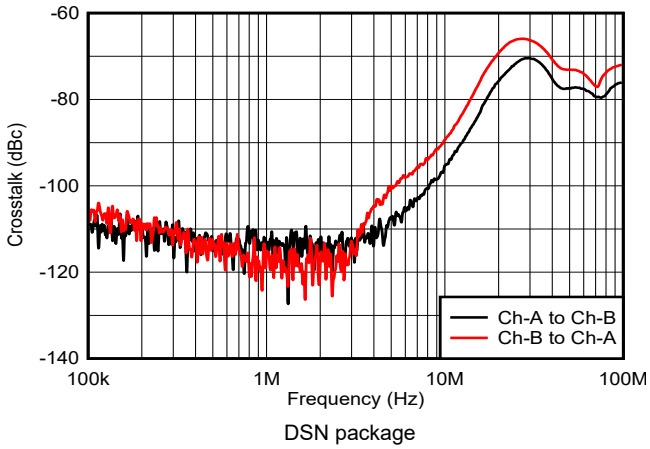

图 6-47. Crosstalk vs Frequency

Copyright © 2024 Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The OPAx863A bipolar voltage-feedback amplifiers offer a 50-MHz gain-bandwidth product with a proprietary in-package trim technology for high-precision performance with a maximum 95-µV input offset voltage and 1.2-µV/℃ offset drift. The OPAx863A are low-power, rail-to-rail input and output (RRIO) operational amplifiers with a voltage noise density of 6.3 nV/ √ Hz and a 1/f noise corner at 25 Hz. The OPAx863A work with a wide-supply voltage range of 2.7 V to 12.6 V and consume only 800 µA of quiescent current. The OPAx863A operate with a 2.7-V supply, are RRIO capable, consume low power, and offer a power-down mode, which makes them an excellent amplifier choice for 3.3-V or lower voltage applications that need excellent ac performance. The main and auxiliary input stages of the amplifier are matched for gain bandwidth product (GBW), noise, and offset voltage, and designed for applications that require a wide dynamic input range and good SNR.

The device includes an overload power limit feature that limits the increase in quiescent current with overdriven and saturated outputs to either of the supply rails. For more details of this overload power limit feature, see 节 7.3.2.1. The amplifier output is protected against short-circuit fault conditions.

The OPAx863A feature a power-down mode (PD) with a PD quiescent current of 20µA (maximum) with a 3-V supply, and a turn-on and turn-off time less than 8µs.

7.2 Functional Block Diagram

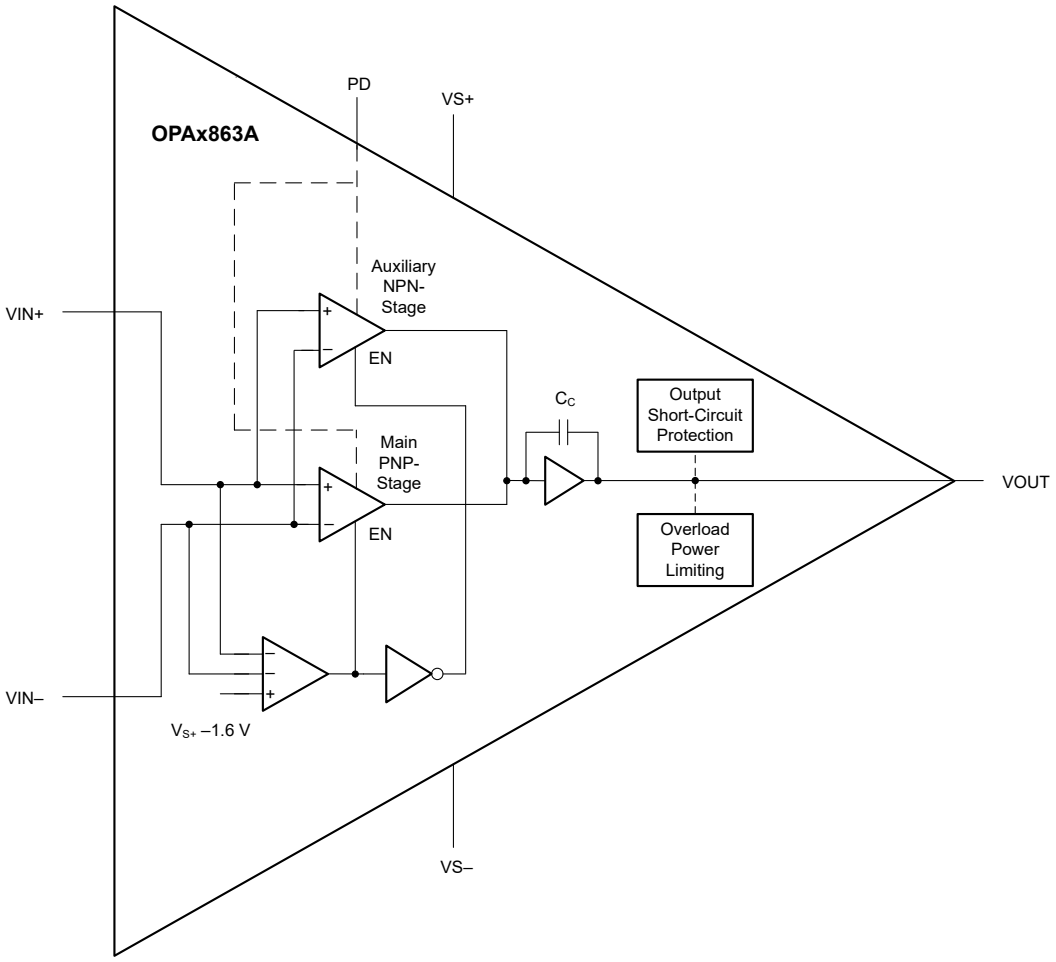

7.3 Feature Description

7.3.1 Input Stage

The OPAx863A include a rail-to-rail input stage. The main stage differential pair using PNP bipolar transistors operates for common-mode input voltages from V_{S-} – 0.2 V to V_{S+} – 1.6 V. The amplifier inputs transition into the auxiliary stage using NPN transistors for common-mode input voltages from V_{S+} – 1.6 V till V_{S+} + 0.2 V. The PNP and NPN input stages offer a gain-bandwidth product of 50 MHz and a voltage noise density of 6.3 nV/ √Hz. The offset voltage for the two input stages is matched to lie within the device specifications. The auxiliary NPN input stage does not use the slew-boost circuit during large-signal transient response. The input bias current for the PNP and NPN input stages is opposite in polarity, which adds an additional offset based on the values of the gain-setting and feedback resistors. A common-mode input voltage transition between these input stages causes a crossover distortion that must be considered in high-frequency applications requiring excellent linearity. Limit the common-mode input voltage to V_{S+} – 1.6 V (maximum) for main-stage operation across process and ambient temperature.

The OPAx863A are bipolar amplifiers; therefore, the two inputs are protected with antiparallel back-to-back diodes between the inputs, which limits the maximum input differential voltage to 1 V. The amplifier is slew limited, and the two inputs are pulled apart up to 1 V when the antiparallel diodes begin to conduct in very fast input or output transient conditions. Make sure to use gain-setting and feedback resistors large enough to limit the current through these diodes in such conditions.

7.3.2 Output Stage

The OPAx863A feature a rail-to-rail output stage with possible signal swing from V_{S-} + 0.2 V to V_{S+} – 0.2 V. Violating the output headroom of either supply causes output signal clipping and introduces distortion.

The OPAx863A integrate an output short-circuit protection circuit that makes the device rugged for use in real-world applications.

7.3.2.1 Overload Power Limit

During overload or fault conditions, bipolar rail-to-rail output (RRO) amplifiers consume excessive quiescent current (five to seven times) with saturated outputs. With saturated outputs, the output signal is clipped with much higher base current from output predriver stage which results in increase in device quiescent current. During this condition, the negative feedback control is disabled and an input differential voltage appears thereby resulting in an input overdrive. During input overdrive, the slew boost circuit engages causing increase in the tail current and hence the device quiescent current. This overall increase in quiescent current can cause excessive battery discharge in portable products shortening operating lifetime or disturb the thermal equilibrium causing irreversible damage due to increased system power dissipation in a multichannel design.

The OPAx863A includes an intelligent overload detection circuit that monitors for output saturation and limits the base drive from output predriver circuit and disables the slew boost circuit in this condition. 表 7-1 compares the increase in quiescent current with 500-mV input overdrive for OPAx863A devices and other voltage-feedback amplifiers without overload power limit.

表 7-1. Quiescent Current with Saturated Outputs

DEVICE	INPUT DIFFERENTIAL VOLTAGE	QUIESCENT CURRENT DURING OVERLOAD	INCREASE IN I_Q FROM STEADY-STATE CONDITION
OPAx863A with overload power limit	500 mV	1.4 mA	1.8 ×
Competitor amplifier without overload power limit	500 mV	4.05 mA	7.1 ×

Copyright © 2024 Texas Instruments Incorporated

7.3.3 ESD Protection

As 图 7-1 shows, all device pins are protected with internal ESD protection diodes to the power supplies. These diodes provide moderate protection to input overdrive voltages greater than the supplies. The protection diodes typically support 10-mA continuous input and output currents. Use series current limiting resistors if input voltages exceeding the supply voltages occur at the amplifier inputs, which makes sure that the current through the ESD diodes remains within the rated value. OPAx863A is a bipolar amplifier; therefore, the two inputs are protected with antiparallel, back-to-back diodes between the inputs that limits the maximum input differential voltage to approximately 1 V. Make sure to use gain-setting and feedback resistors large enough to limit the current through these diodes in fast slewing conditions.

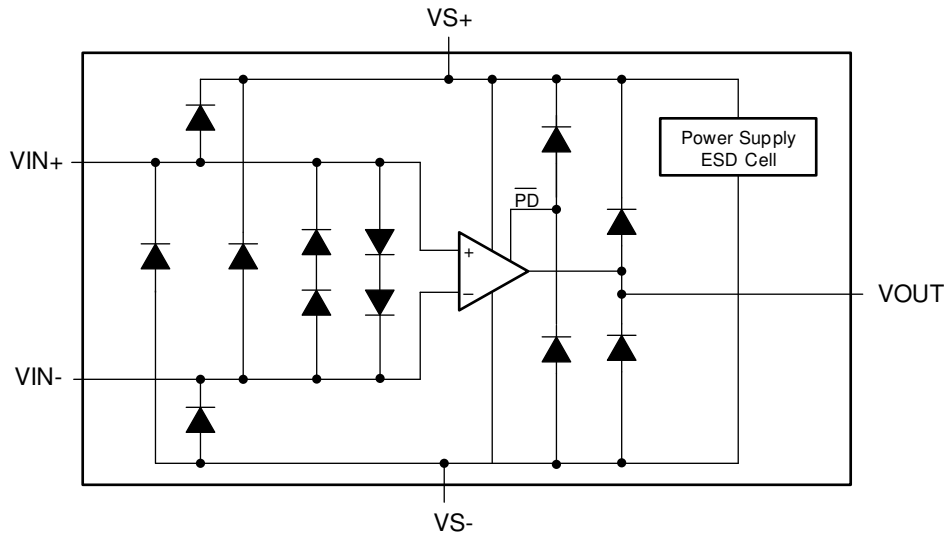

图 7-1. Internal ESD Protection

7.4 Device Functional Modes

7.4.1 Power-Down Mode

The OPAx863A includes a power-down mode for low-power standby operation with a quiescent current of 8.5 μA (typical) and high output impedance. Many low-power systems are active for only a small time interval when the parameters of interest are measured and remain in low-power standby mode for a majority of the time, for an overall small average power consumption. The OPAx863A enables such low-power operation with quick turn-on within less than 8 μs. See the *Electrical Characteristics* tables for power-down pin control thresholds.

The OPAx863A is enabled with the $\overline{PD}$ pin driven to V_{S+} – 0.5 V or greater. The device powers down if the $\overline{PD}$ pin is driven to V_{S+} – 1.5 V or less with a driver device capable of sinking approximately 1 μA (typical) current from the $\overline{PD}$ pin. If level translation is needed to realize the $\overline{PD}$ pin thresholds for enable or power-down modes of operation, use an external pullup resistor from $\overline{PD}$ pin to V_{S+} driven with an open-collector output.

Copyright © 2024 Texas Instruments Incorporated

8 Application and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客 户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

8.1 Application Information

The OPAx863A are classic voltage-feedback amplifiers, where each channel has two high-impedance inputs and a low-impedance output. Theses devices feature a GBW of 50 MHz, 6.3-nV/ √ Hz noise, RRIO capability, and high-precision performance consuming only 800 µA of quiescent current. These features make the OPAx863A an excellent choice for use in precision data acquisition, reference buffering with fast settling, high gain, and filter circuits. The overload power limit feature makes the OPAx863A truly low power in high-gain multichannel systems, and limits any increase in quiescent current during output overload conditions.

8.2 Typical Applications

8.2.1 Active Filters

Active filter circuits are used to amplify signals in the pass band, attenuate signals in the stop band, and also limit the integrated noise at the amplifier output. The OPAx863A, with a wide bandwidth and high-precision performance, is an excellent device for designing multifeedback (MFB) low-pass filter circuits.

8.2.1.1 Design Requirements

This section discusses the design of a MFB low-pass active filter with a cut-off frequency at 2 MHz and the impact of amplifier gain-bandwidth (GBW) on filter performance.

8.2.1.2 Detailed Design Procedure

图 8-1 shows the use of OPAx863A in a second-order multifeedback (MFB) low-pass filter with a cut-off frequency of 2 MHz. The frequency response of the circuit in 图 8-1 is compared for various amplifiers with different gain-bandwidth products and shown in 图 8-2:

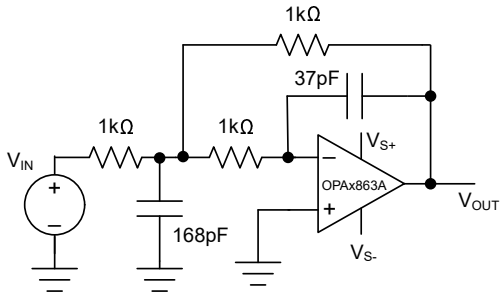

图 8-1. MFB Low-Pass Filter Circuit Using the OPAx863A

表 8-1. Impact of Amplifier GBW on Cutoff Frequency

DEVICE	GBW (MHz)	CUTOFF FREQUENCY (MHz)
TLV9051	5	1.59
LMV641	10	1.78
OPA2834	20	1.87
OPAx863A	50	1.95
OPA836	110	1.98

Copyright © 2024 Texas Instruments Incorporated

表 8-1 provides the following benefits of using OPAx863A in an MFB low-pass filter circuit:

- High-precision measurements with low offset voltage across the operating temperature range for low-frequency signals in pass band
- High linearity due to the larger GBW and loop gain for low-frequency signals in pass band
- Higher accuracy of cutoff frequency and smaller variations over process and temperature
- Small integrated output noise due to low-pass filtering

Based on 图 8-2, and as with the OPAx863A, use an amplifier with a gain bandwidth product at least 20 × greater than the filter cutoff frequency. This configuration results in a high-precision and high-linearity, low-pass-filter design.

8.2.1.3 Application Curves

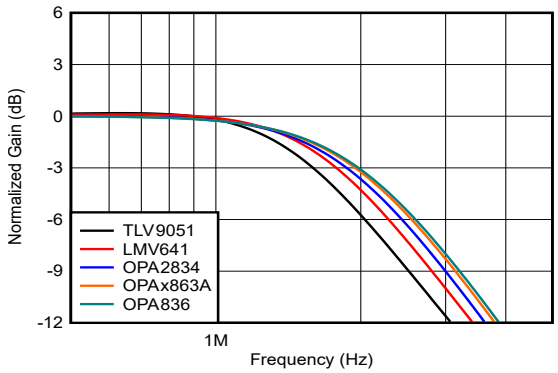

图 8-2. MFB Low-Pass Filter Frequency Response vs GBW

8.2.2 Low-Power SAR ADC Driver and Reference Buffer

图 8-3 shows the use of the OPAx863A as a SAR ADC input driver driving the .ADS7057 sensors, which are used for interface with the physical environment, exhibit high output impedance, and cannot drive SAR ADC inputs directly. A wide-GBW amplifier, such as the OPAx863A, is needed to charge the switching capacitors at the SAR ADC input, and quickly settle to the required accuracy within the given acquisition time. The OPAx863A wide-GBW, high precision performance enables fast settling, high accuracy sensor measurements, and reference buffering for precision ADCs.

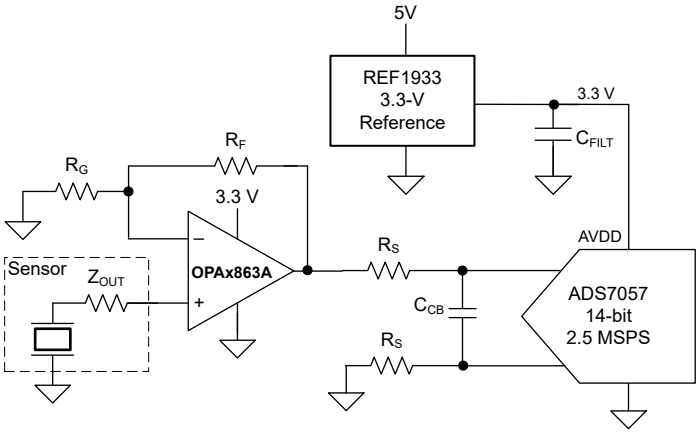

图 8-3. OPAx863A as a Precision SAR ADC Driver

8.3 Power Supply Recommendations

The OPAx863A is intended to operate on supplies ranging from 2.7 V to 12.6 V. The OPAx863A devices operate on single-sided supplies, split and balanced bipolar supplies, or unbalanced bipolar supplies. Operating from a single supply has numerous advantages. The dc errors, due to the –PSRR term, can be minimized with the negative supply at ground. Typically, ac performance improves slightly at 10-V operation with minimal increase in supply current. Minimize the distance (< 0.1 in) from the power supply pins to high-frequency, 0.01-µF decoupling capacitors. A larger capacitor (2.2 µF typical) is used along with a high-frequency, 0.01-µF supply-decoupling capacitor at the device supply pins. Only the positive supply has these capacitors for single-supply operation. Use these capacitors from each supply to ground when a split-supply is used. If necessary, place the larger capacitors further from the device and share these capacitors among several devices in the same area of the printed circuit board (PCB). An optional supply decoupling capacitor across the two power supplies (for split-supply operation) reduces second harmonic distortion.

8.4 Layout

8.4.1 Layout Guidelines

Achieving optimum performance with a high-frequency amplifier (like the OPAx863A) requires careful attention to board layout parasitics and external component types. The *High Speed Amplifiers Generic DSN Evaluation Module* user's guide can be used as a reference when designing the circuit board. Recommendations that optimize performance includes the following:

1. **Minimize parasitic capacitance** to any ac ground for all of the signal I/O pins. Parasitic capacitance on the output and inverting input pins can cause instability on the noninverting input and can react with the source impedance to cause unintentional band-limiting. Open a window around the signal I/O pins in all of the ground and power planes around those pins to reduce unwanted capacitance. Otherwise, ground and power planes must be unbroken elsewhere on the board.
2. **Minimize the distance** (< 0.1 in) from the power-supply pins to high-frequency 0.01-µF decoupling capacitors. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. Always decouple the power-supply connections these capacitors. Use larger (2.2-µF to 6.8-µF) decoupling capacitors, effective at lower frequency, on the supply pins. These capacitors can be placed somewhat farther from the device and shared among several devices in the same area of the PCB.
3. **Carefully select and place external components to preserve the high-frequency performance of the OPAx863A.** Use low-reactance-type resistors. Surface-mount resistors work best and allow a tighter overall layout. Place other network components, such as noninverting input termination resistors, close to the package. Keep resistor values as low as possible and consistent with load-driving considerations. Lower the resistor values to keep the resistor noise terms low and minimize the effect of the parasitic capacitance. Lower resistor values, however, increase the dynamic power consumption because R_F and R_G become part of the amplifier output load network.

Copyright © 2024 Texas Instruments Incorporated

8.4.2 Layout Example

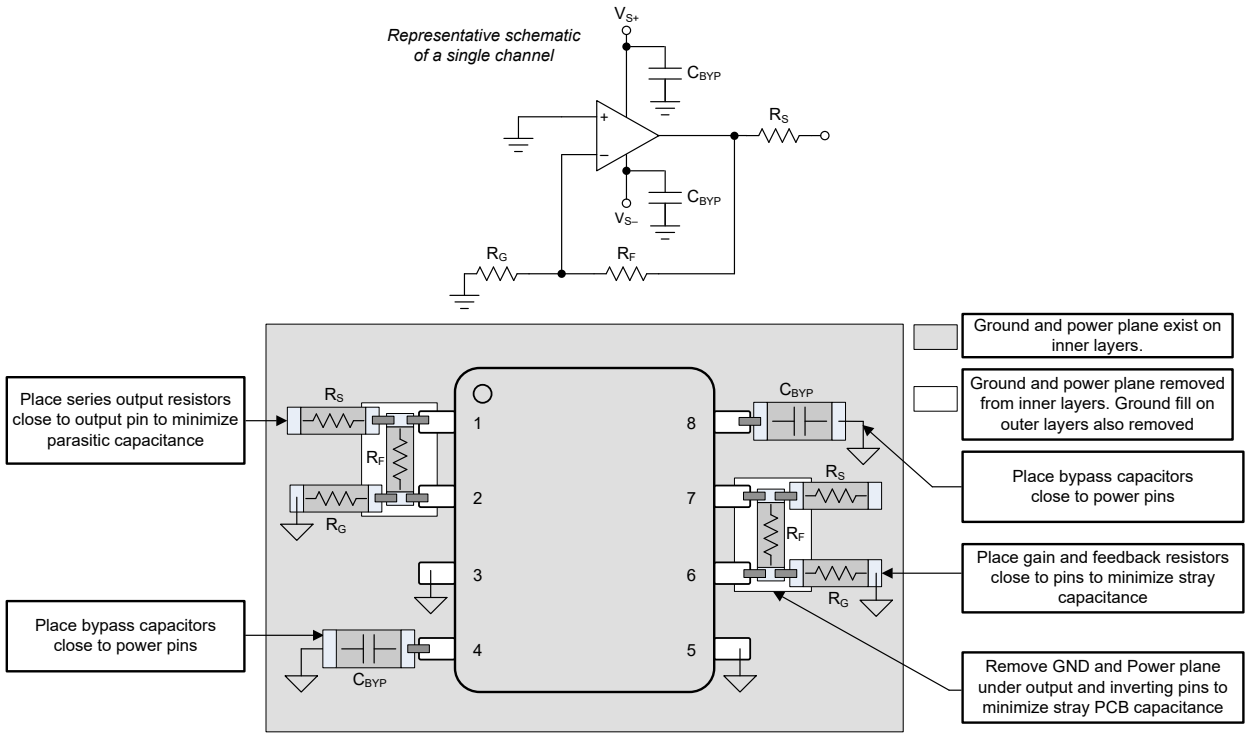

图 8-4. Layout Recommendation for Dual-Channel DGK Package

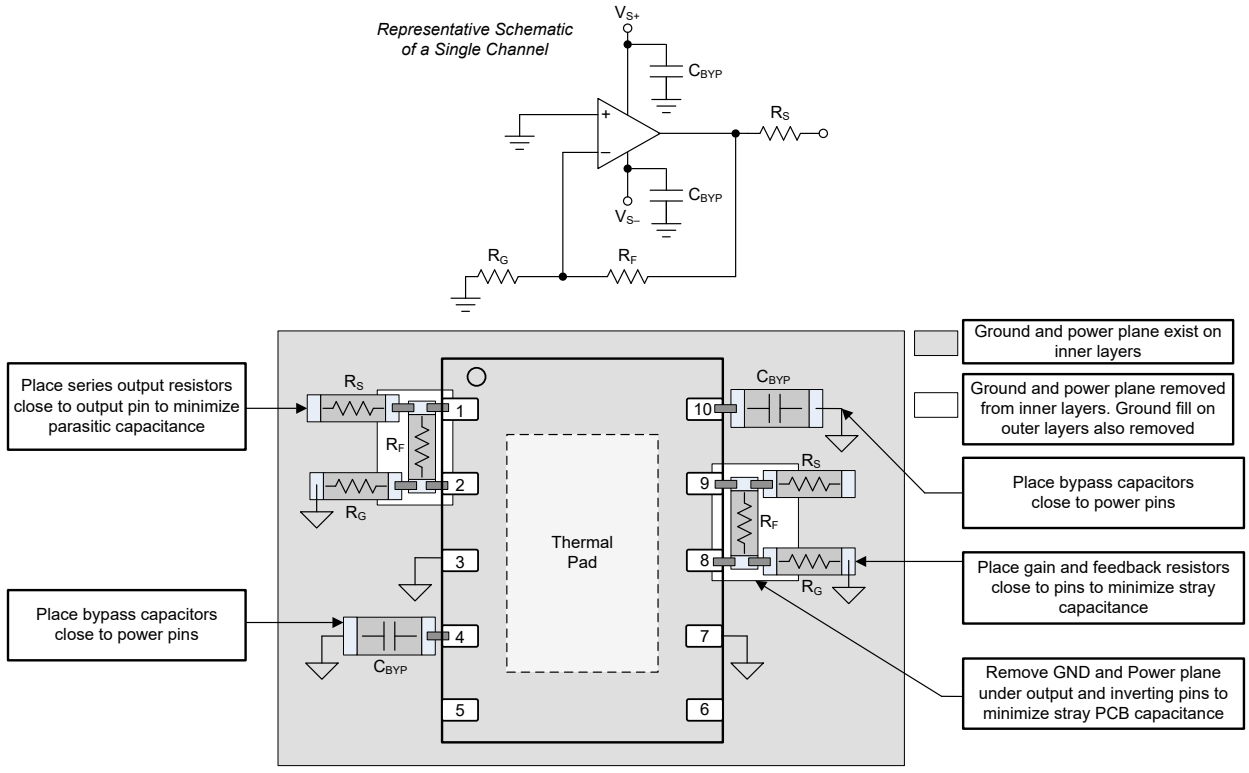

图 8-5. Layout Recommendation for Dual-Channel DSN Package

Copyright © 2024 Texas Instruments Incorporated

9 Device and Documentation Support

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, *High Speed Amplifiers Generic DSN Evaluation Module* user's guide
- Texas Instruments, *Single-Supply Op Amp Design Techniques* application report

9.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击*通知* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.3 支持资源

TI E2E™ 中文支持论坛是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的使用条款。

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

9.5 静电放电警告

静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.6 术语表

TI 术语表　　本术语表列出并解释了术语、首字母缩略词和定义。

10 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision E (June 2024) to Revision F (October 2024)	Page
• 将 D（SOIC，8）封装状态从预发布更改为量产数据（正在供货）	1

Changes from Revision D (December 2023) to Revision E (June 2024)	Page
• 向数据表添加了 D（SOIC，8）和 DGK（VSSOP，8）预发布封装和相关内容	1

Changes from Revision C (August 2023) to Revision D (December 2023)	Page
• 将 OPA863A DBV（SOT-23，5）封装状态从预告信息更改为量产数据（正在供货）并添加了相关内容	1

Copyright © 2024 Texas Instruments Incorporated

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA2863ADGKR	ACTIVE	VSSOP	DGK	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	28A3	Samples
OPA2863ADR	ACTIVE	SOIC	D	8	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	O2863A	Samples
OPA2863AIDSNR	ACTIVE	SON	DSN	10	5000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2863A	Samples
OPA863ADBVR	ACTIVE	SOT-23	DBV	5	3000	RoHS & Green	SN	Level-1-260C-UNLIM	-40 to 125	O863A	Samples
XOPA2863ADGKR	ACTIVE	VSSOP	DGK	8	2500	TBD	Call TI	Call TI	-40 to 125		Samples
XOPA2863ADR	ACTIVE	SOIC	D	8	3000	TBD	Call TI	Call TI	-40 to 125		Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

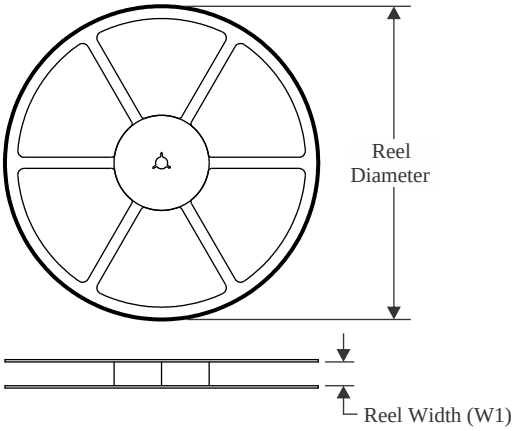

TAPE DIMENSIONS

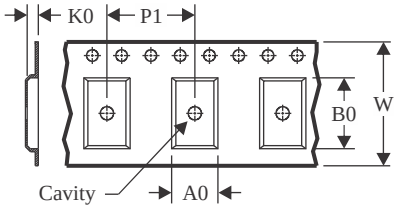

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

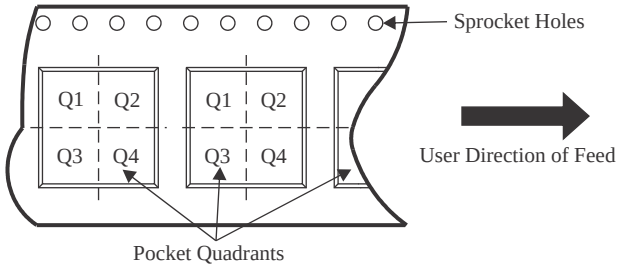

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA2863ADGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2863ADR	SOIC	D	8	3000	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA2863AIDSNR	SON	DSN	10	5000	330.0	12.4	3.15	3.15	0.75	8.0	12.0	Q2
OPA863ADBVR	SOT-23	DBV	5	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

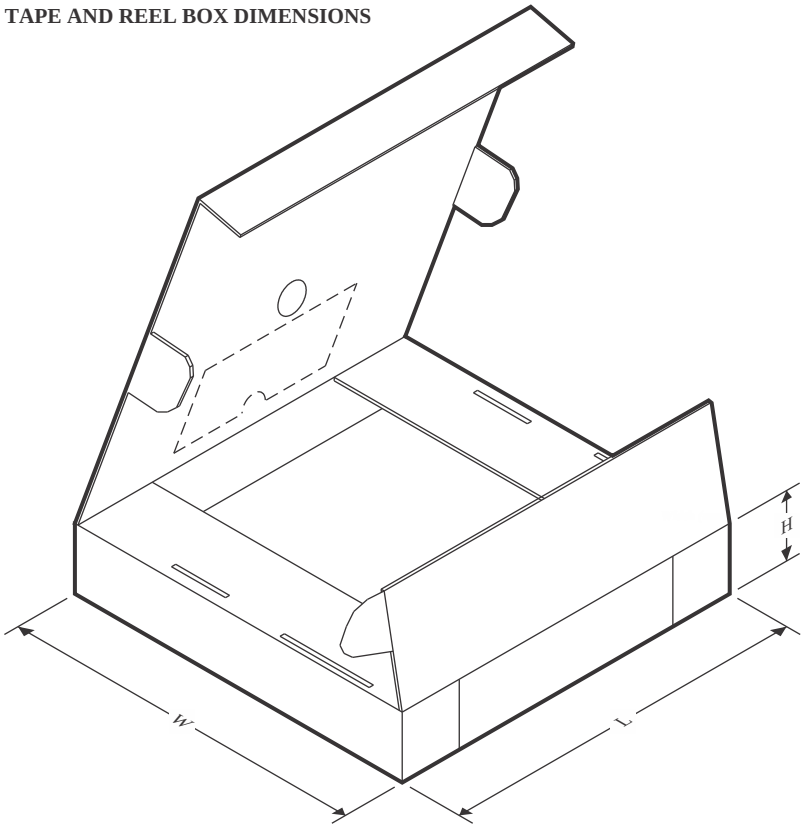

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA2863ADGKR	VSSOP	DGK	8	2500	353.0	353.0	32.0
OPA2863ADR	SOIC	D	8	3000	353.0	353.0	32.0
OPA2863AIDSNR	SON	DSN	10	5000	364.0	357.0	31.0
OPA863ADBVR	SOT-23	DBV	5	3000	210.0	185.0	35.0



PACKAGE OUTLINE

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

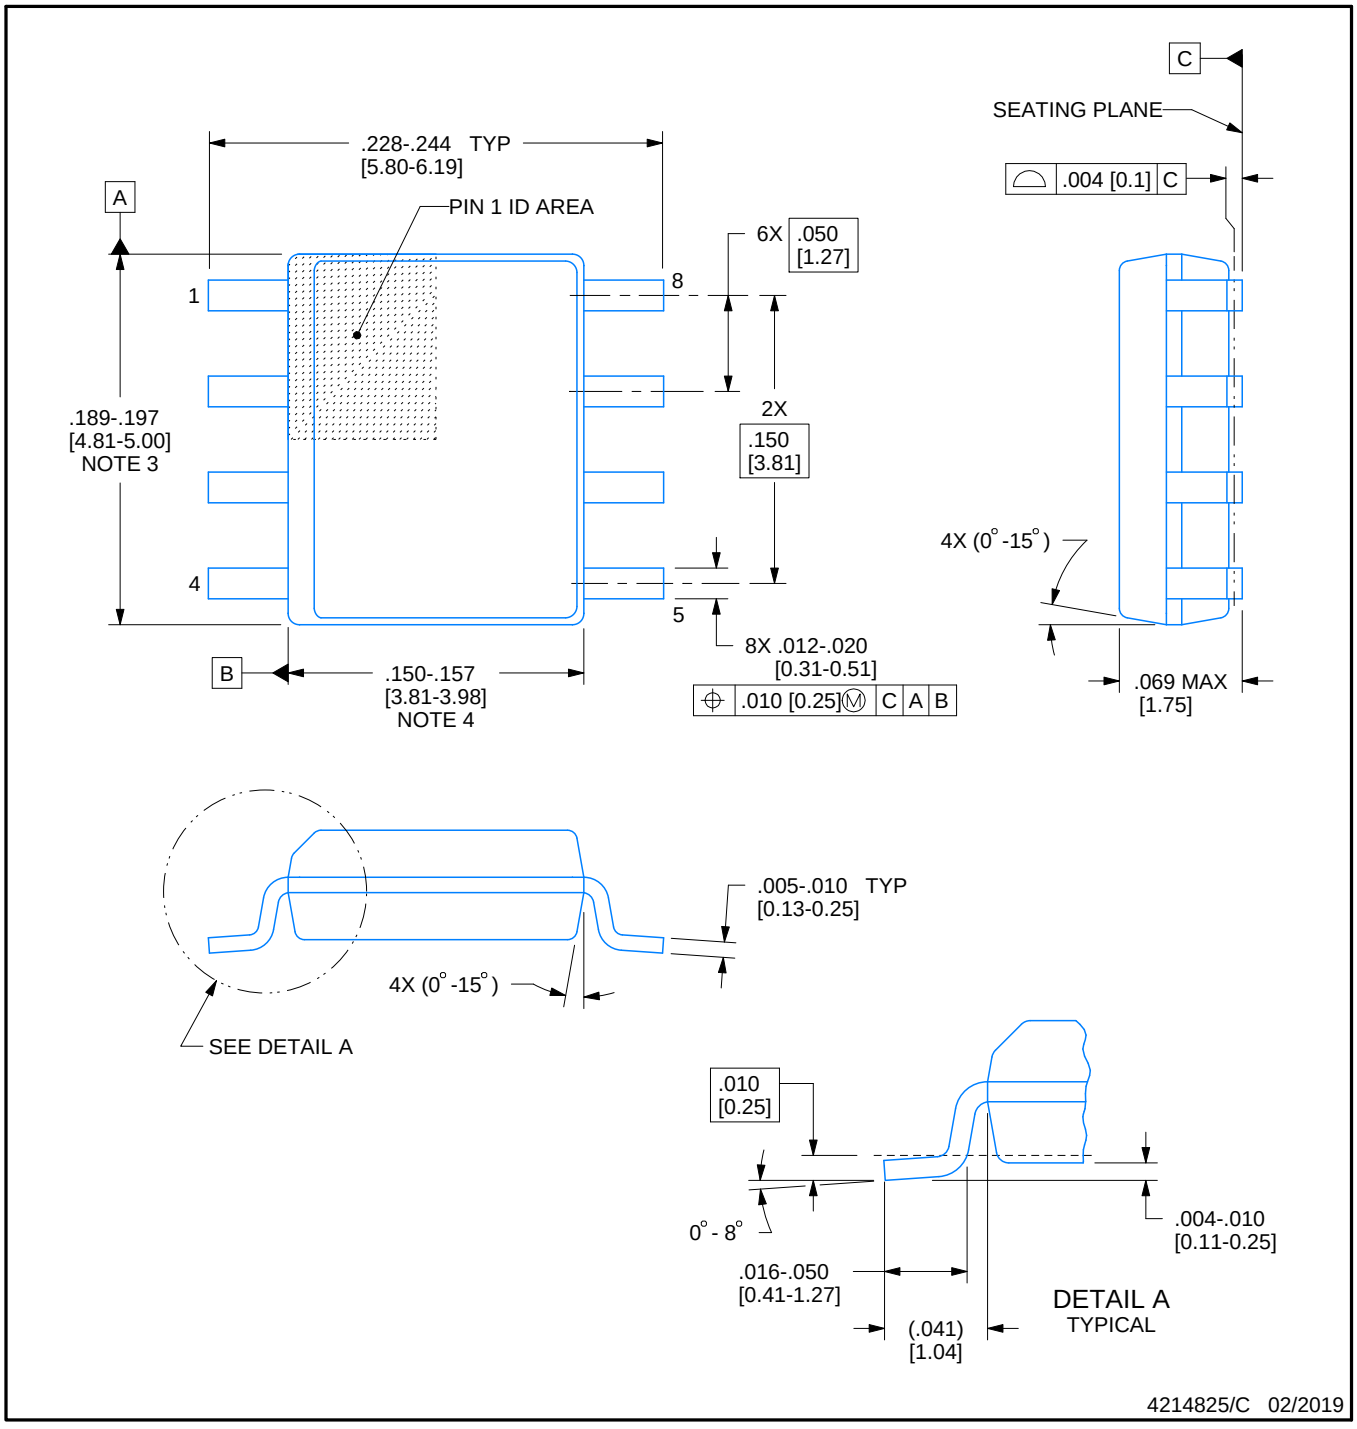

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

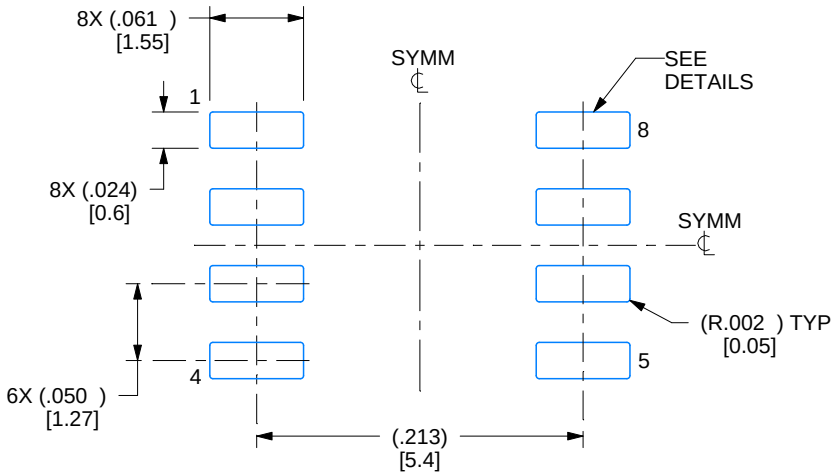

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

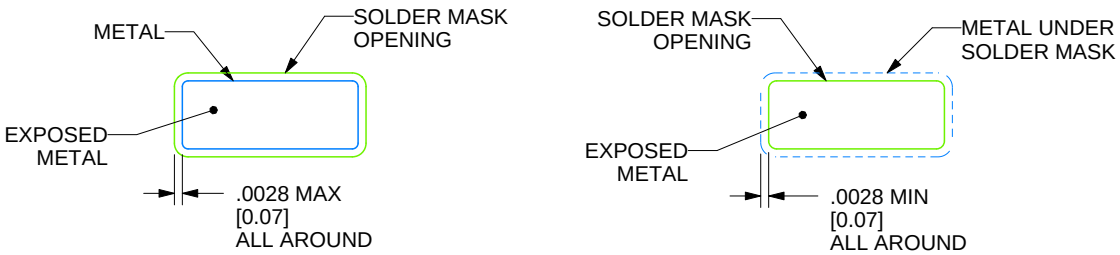

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

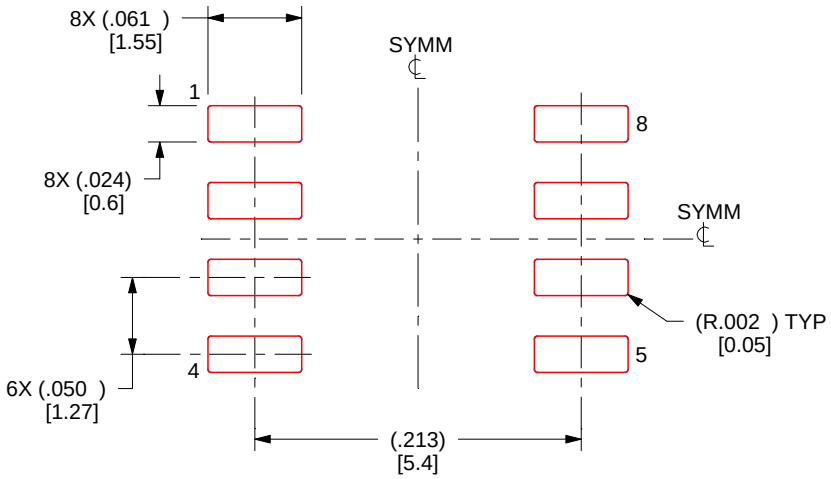

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

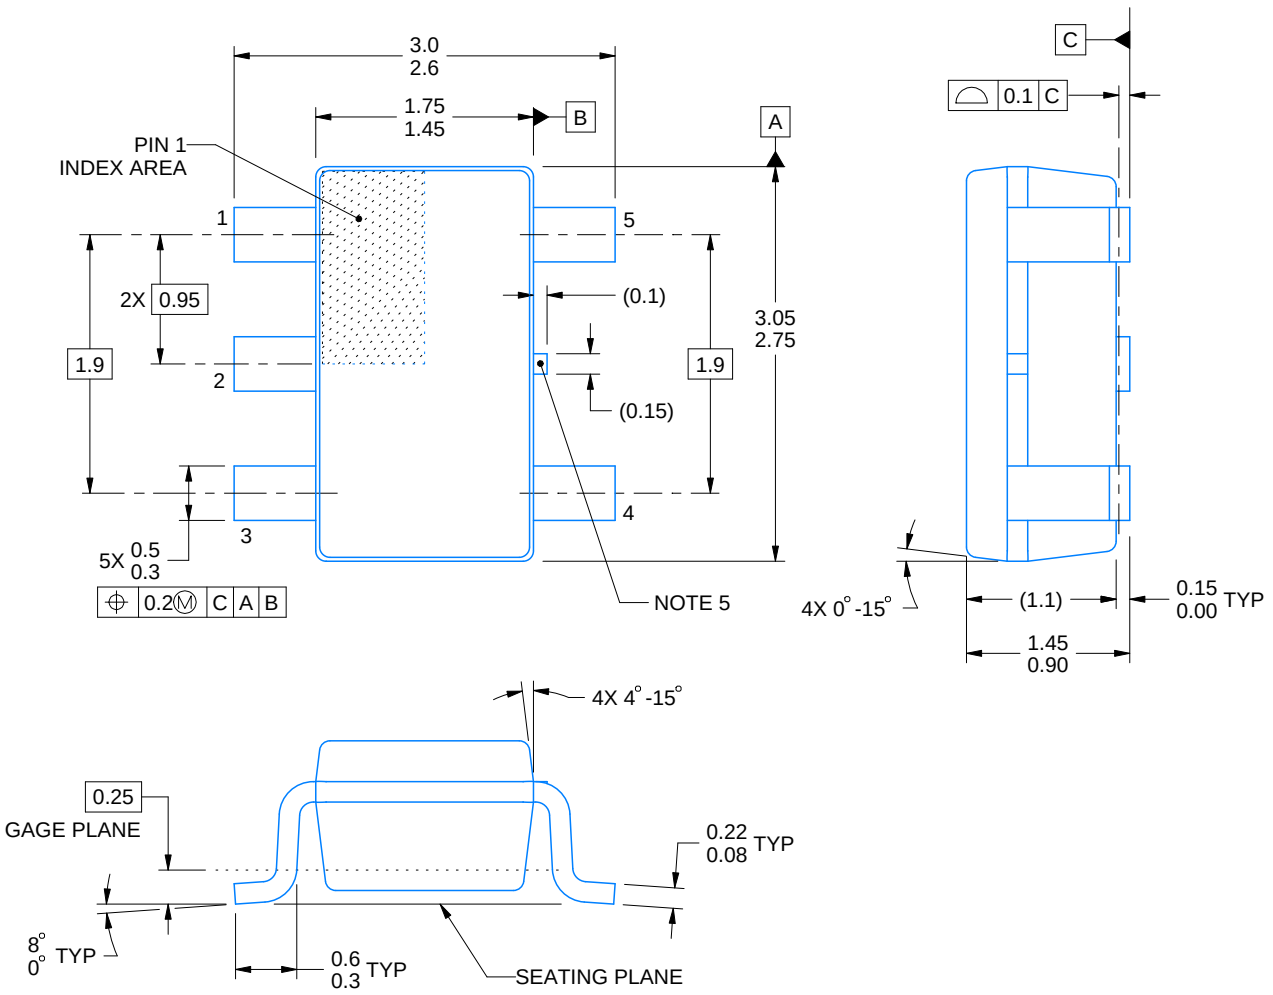

4214839/K 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

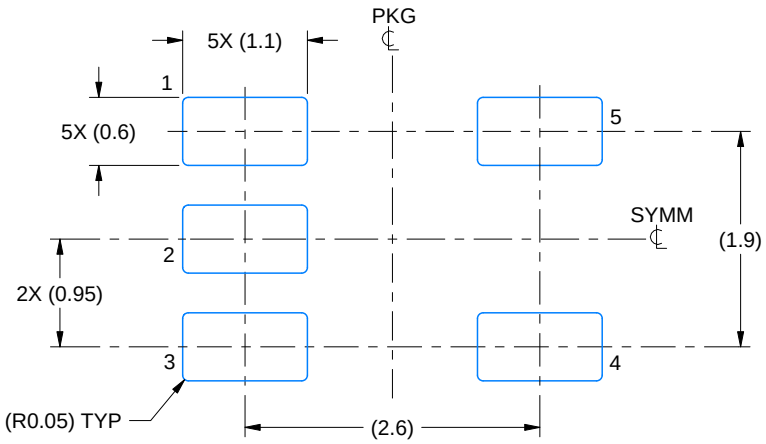

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

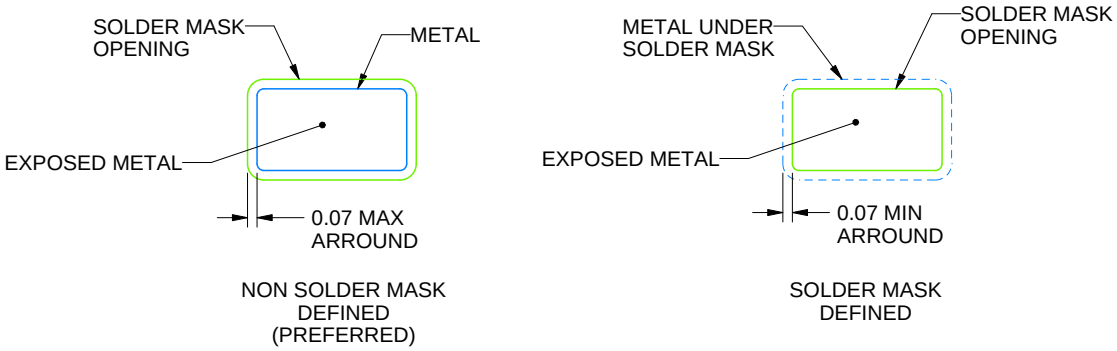

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

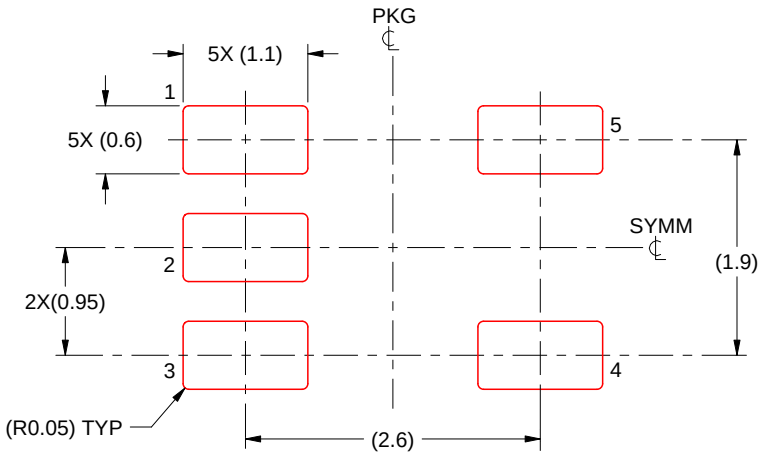

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DGK0008A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

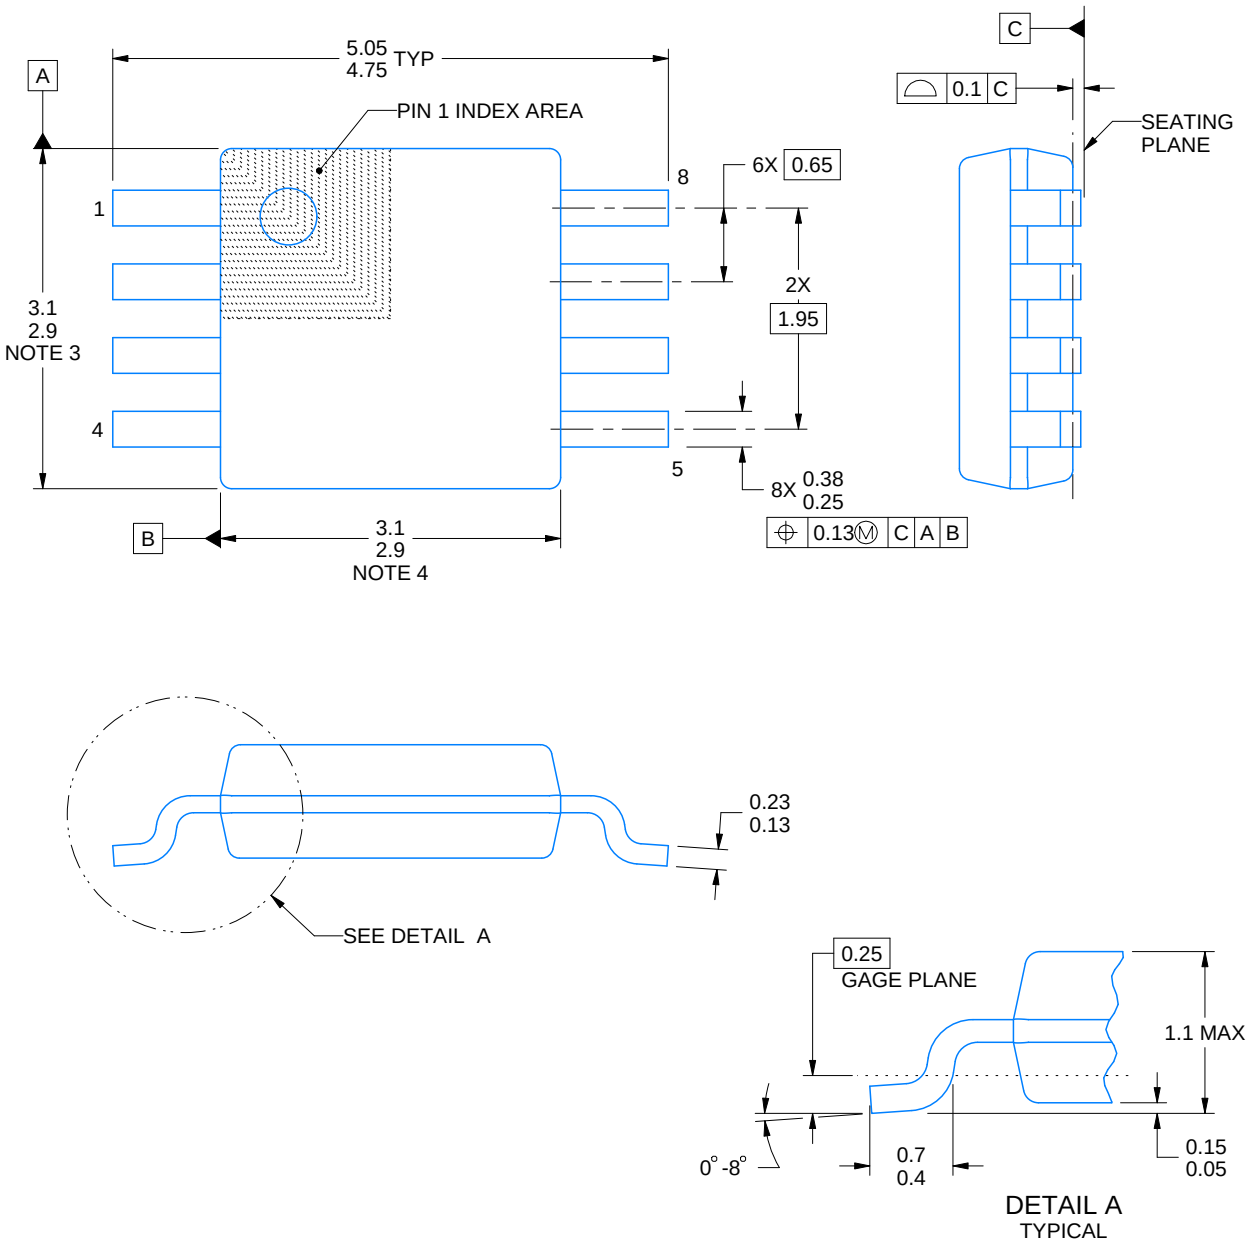

PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

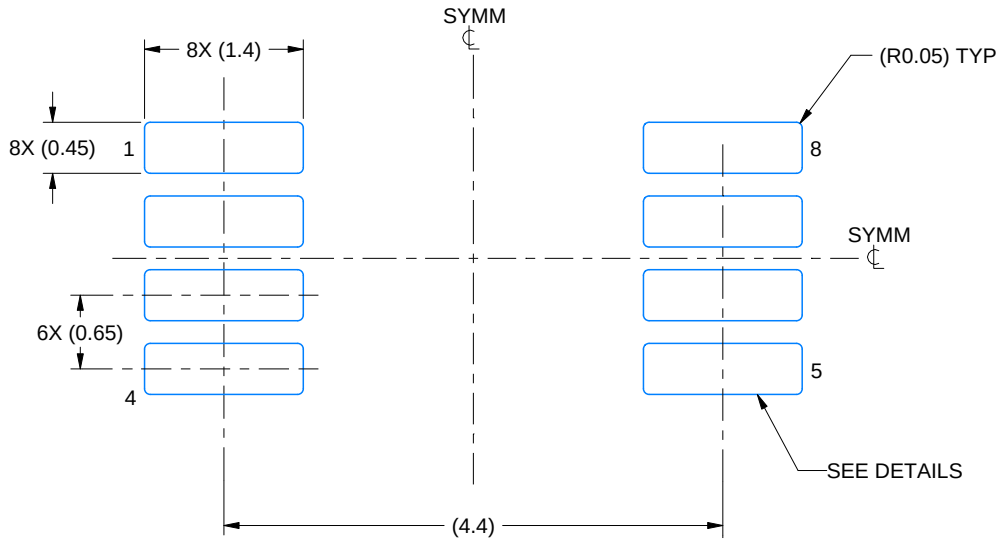

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

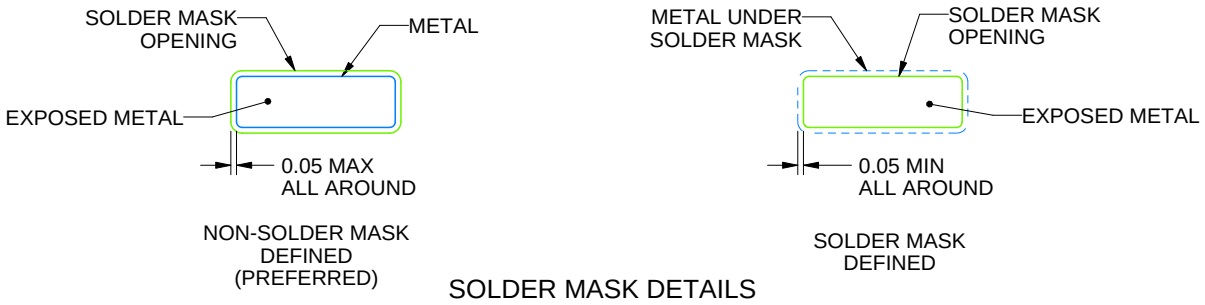

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

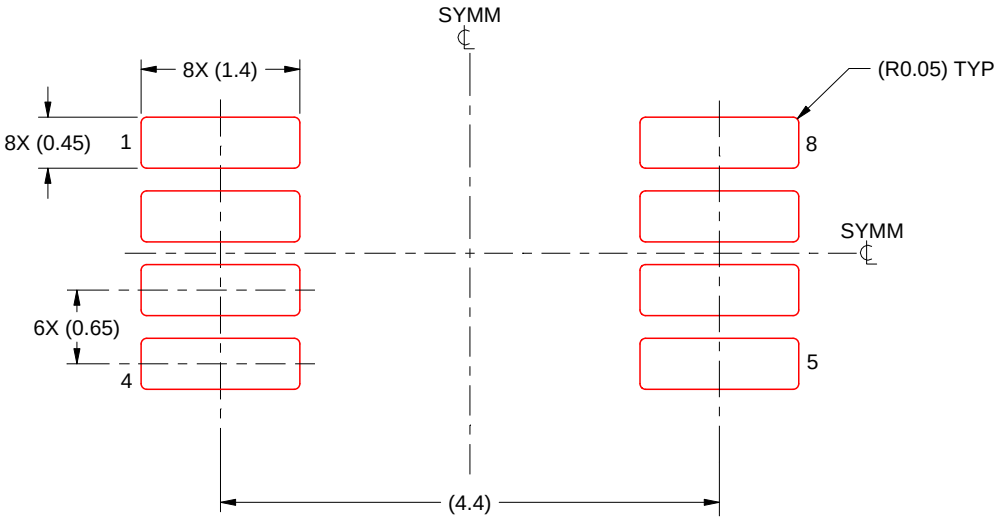

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

DSN (S–PUSON–N10) PLASTIC QUAD FLATPACK NO–LEAD

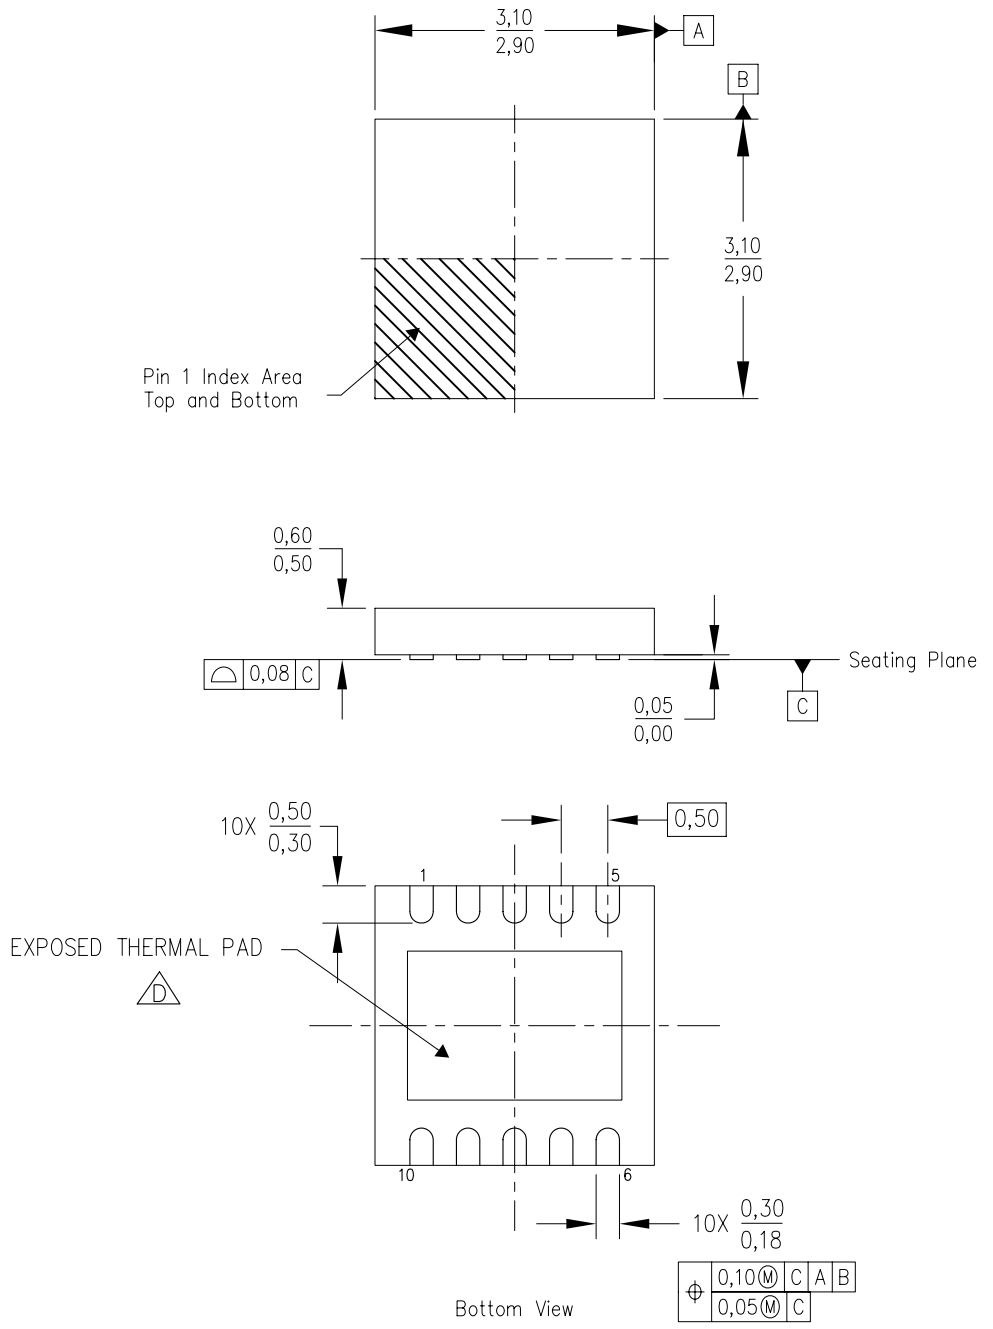

4209052/B 11/10

NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5–1994.
B. This drawing is subject to change without notice.
C. QFN (Quad Flatpack No–Lead) package configuration.
D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.

重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款或 ti.com 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024，德州仪器 (TI) 公司