

# TRF1305B1 シングルチャネル、DC から 6.5GHz 超、3dB 帯域幅、完全差動アンプ

## 1 特長

- 性能が最適化された 3 つのパワー ゲインのバリエーション:
  - 15dB (TRF1305A1)
  - 10dB (TRF1305B1)
  - 5dB (TRF1305C1)
- 固定ゲインは外付け抵抗で低減可能
- 幅広い大信号 RF 帯域幅:
  - TRF1305B1: 7.2GHz (3dB)、6.4GHz (1dB)
- OP1dB (差動 100Ω 負荷):
  - 15.7dBm (2GHz)、12.8dBm (4GHz)
- OIP3: 34dBm (2GHz)、25.5dBm (4GHz)
- ノイズ フィギュア: 10.4dB (2GHz)、13.4dB (4GHz)
- スルーレート: 25kV/μs
- 広い入力 (±1V) および出力 (±0.5V) の同相電圧範囲
- 柔軟な構成とモード:
  - シングルエンド入力、差動出力 (S2D)
  - 差動入力、差動出力 (D2D)
  - シングルエンド出力 (性能に制限あり)
  - AC 結合または DC 結合の入出力
  - 調整可能な出力同相電圧
  - 同相入力範囲拡張モード
- 5V、柔軟な単一または分割電源をサポート
- アクティブな消費電力: 500 mW
- (パワーダウン モード時)

## 2 アプリケーション

- RF サンプリングまたは GSPS ADC ドライバ
- 試験および測定機器
- ワイヤレス通信テスト
- RF デジタイザ
- オシロスコープ (DSO)
- 高速デジタイザ
- スペクトル アナライザ
- ベクトル信号トランシーバ (VST)

- 質量分析システム
- 同相モードレベル シフト
- IQ ミキサ インターフェイス

## 3 概要

TRF1305B1 は、非常に高性能な閉ループの シングルチャネル RF アンプで、真の DC から 6.5GHz を超える動作帯域幅を持ちます。このデバイスは、[ADC12DJ5200RF](#) や [ADC32RF5x](#) などの高速で高性能な ADC を、DC 結合または AC 結合のインターフェイスで駆動する優れた性能を備えています。このアンプは、RF、ゼロ IF、複素 IF、および高速の時間領域アプリケーションでの使用に最適化されています。このデバイスは、固定ゲイン構成での性能に最適化されています。より低いゲインが必要な場合は、外付け抵抗を使用します。


TRF1305B1 は、異なる出力同相電圧と入力同相電圧を設定できる VO<sub>CM</sub> ピンを備えています (たとえば、レベルシフトや、異なる DC 同相電圧を持つほとんどの IQ 降圧コンバータの ADC インターフェイス アプリケーション用)。また TRF1305B1 は、2 レールのフローティング分割または単一電源のオプションと、入力同相範囲を電源に近い範囲に拡張できる MODE ピンを備えています。

TRF1305B1 には、パワー ダウン機能があります。このデバイスは、テキサス・インスツルメンツ独自の高度な BiCMOS プロセスで製造されており、省スペースの 2mm × 2mm、12 ピンの WQFN-FCRLF パッケージで供給されます。

### 製品情報

部品番号 <sup>(1)</sup>	D2D パワー ゲイン	パッケージ <sup>(2)</sup>
TRF1305A1 <sup>(3)</sup>	15 dB	RPV (WQFN-FCRLF, 12)
TRF1305B1	10 dB	
TRF1305C1 <sup>(3)</sup>	5 dB	

- セクション 4 を参照してください。
- 詳細については、セクション 11 を参照してください。
- プレビュー情報 (事前情報ではありません)。

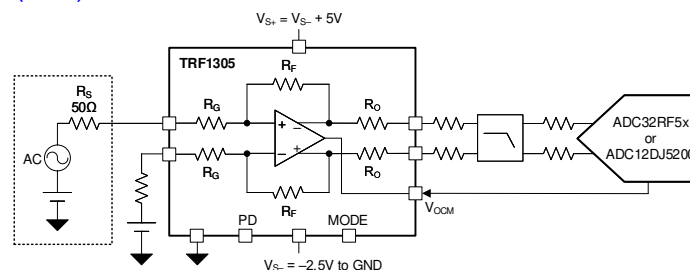

S2D 構成で高速 ADC を駆動する TRF1305x1



## Table of Contents

1 特長.....	1	7.4 Device Functional Modes.....	16
2 アプリケーション.....	1	<b>8 Application and Implementation.....</b>	<b>17</b>
3 概要.....	1	8.1 Application Information.....	17
4 Device Comparison Table.....	2	8.2 Typical Application.....	20
5 Pin Configuration and Functions.....	3	8.3 Power Supply Recommendations.....	22
6 Specifications.....	4	8.4 Layout.....	22
6.1 Absolute Maximum Ratings.....	4	<b>9 Device and Documentation Support.....</b>	<b>24</b>
6.2 ESD Ratings.....	4	9.1 Documentation Support.....	24
6.3 Recommended Operating Conditions.....	4	9.2 ドキュメントの更新通知を受け取る方法.....	24
6.4 Thermal Information.....	4	9.3 サポート・リソース.....	24
6.5 Electrical Characteristics - TRF1305B1.....	5	9.4 Trademarks.....	24
6.6 Typical Characteristics - TRF1305B1.....	8	9.5 静電気放電に関する注意事項.....	24
7 Detailed Description.....	14	9.6 用語集.....	24
7.1 Overview.....	14	<b>10 Revision History.....</b>	<b>24</b>
7.2 Functional Block Diagram.....	14	<b>11 Mechanical, Packaging, and Orderable Information.....</b>	<b>24</b>
7.3 Feature Description.....	14		

## 4 Device Comparison Table

DEVICE	GAIN	CHANNEL COUNT
TRF1305A1 (preview)	15dB	1
<a href="#">TRF1305B1</a>	10dB	
TRF1305C1 (preview)	5dB	
TRF1305A2 (preview)	15dB	2
<a href="#">TRF1305B2</a> (active)	10dB	
TRF1305C2 (preview)	5dB	

## 5 Pin Configuration and Functions

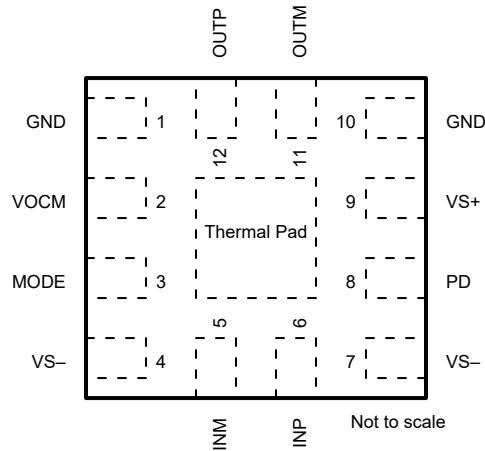


図 5-1. RPV Package, 12-Pin WQFN-FCRLF (Top View)

表 5-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
GND	1, 10	Ground	Ground. Reference for RF signals and PD control signal. Connect to ground plane on the board. Internally shorted to the thermal pad.
INM	5	Input	Negative side of differential input signal
INP	6	Input	Positive side of differential input signal
MODE	3	Input	Mode selection pin. See also <a href="#">MODE Pin section</a> .
OUTM	11	Output	Negative side of differential output signal
OUTP	12	Output	Positive side of differential output signal
PD	8	Input	Power-down signal, referenced to thermal pad. Supports both 1.8V and 3.3V logic. Logic 0 or open = device enabled. Logic 1 = device powered down.
VOCM	2	Input	Output common-mode voltage input pin. Floating the pin sets the output common-mode voltage to $V_{S-} + 2.5V$ .
VS-	4, 7	Power	Negative supply voltage
VS+	9	Power	Positive supply voltage
Thermal Pad	Pad	Ground	Reference for RF signals and PD control signal; also serves as a thermal pad. Connect to heat-dissipating ground or $V_{S-}$ plane on the board.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
V <sub>S-</sub>	Negative supply voltage, referenced to thermal pad	-3	3	V
V <sub>S+</sub>	Positive supply voltage	-0.3	V <sub>S-</sub> + 5.5	V
V <sub>S</sub>	Total supply voltage, V <sub>S</sub> = V <sub>S+</sub> - V <sub>S-</sub>	-0.3	5.5	V
P <sub>IN</sub>	Input RF power		20	dBm
V <sub>PD</sub>	PD pin voltage, referenced to thermal pad, V <sub>S+</sub> ≥ 3.3V	-0.3	3.6	V
	PD pin voltage, referenced to thermal pad, V <sub>S+</sub> < 3.3V	-0.3	V <sub>S+</sub> + 0.3	
V <sub>OCM</sub>	VOCM pin voltage	V <sub>S-</sub> + 1	V <sub>S-</sub> + 4	V
V <sub>MODE</sub>	MODE pin voltage	V <sub>S-</sub> - 0.3	V <sub>S-</sub> + 3.3	V
T <sub>J</sub>	Junction temperature	-40	150	°C
T <sub>stg</sub>	Storage temperature	-40	150	°C

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If briefly operating outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.

### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±1000	V
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002, all pins <sup>(2)</sup>	±500	

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>S+</sub>	Positive supply voltage	2.5		5	V
V <sub>S-</sub>	Negative supply voltage	-2.5		0	V
V <sub>S</sub>	Total supply voltage, V <sub>S</sub> = V <sub>S+</sub> - V <sub>S-</sub>		5		V
T <sub>J</sub>	Junction temperature	-40		125	°C

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TRF1305x1	UNIT
		RPV (WQFN-FCRLF)	
		12 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	66.9	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	64.3	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	17.4	°C/W
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	1.7	°C/W
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	17.2	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	9.0	°C/W

- (1) For information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics - TRF1305B1

at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output with differential source impedance ( $Z_S$ ) = 100Ω, differential output load ( $Z_L$ ) = 100Ω, external input resistor network (see [8-3](#)), and inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>AC PERFORMANCE</b>						
SSBW	Small-signal bandwidth (3dB)	$P_{\text{IN}} = -20\text{dBm}$ at each input		7.3		GHz
	Small-signal bandwidth (1dB)	$P_{\text{IN}} = -20\text{dBm}$ at each input		6.4		
LSBW	Large-signal bandwidth (3dB)	Differential $P_{\text{IN}} = -3\text{dBm}$		7.2		GHz
	Large-signal bandwidth (1dB)	Differential $P_{\text{IN}} = -3\text{dBm}$		6.4		
S21	Power gain	$f = 4\text{GHz}$		10		dB
	Gain variation over temperature	$f = 4\text{GHz}$ , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$		1		
S11	Input return loss	$f = 10\text{MHz}$ to $7.5\text{GHz}$		-11.3		dB
S12	Reverse isolation	$f < 10\text{GHz}$ (device enabled)		-20		dB
$G_{\text{IMB}}$	Differential gain imbalance	$f < 5\text{GHz}$ , S2D, $P_{\text{IN}} = -20\text{dBm}$ with $50\Omega Z_S$		$\pm 0.2$		dB
$\text{PH}_{\text{IMB}}$	Differential phase imbalance	$f < 5\text{GHz}$ , S2D, $P_{\text{IN}} = -20\text{dBm}$ with $50\Omega Z_S$		$\pm 2$		°
OP1dB	Output 1dB compression point	$f = 500\text{MHz}$		15.5		dBm
		$f = 1\text{GHz}$		16		
		$f = 2\text{GHz}$		15.7		
		$f = 3\text{GHz}$		15		
		$f = 4\text{GHz}$		12.8		
		$f = 5\text{GHz}$		11		
HD2	Second-order harmonic distortion	$f = 500\text{MHz}$ , $V_O = 2V_{\text{PP}}$		-84		dBc
		$f = 1\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-72		
		$f = 2\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-62		
		$f = 3\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-56		
		$f = 4\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-53		
HD3	Third-order harmonic distortion	$f = 500\text{MHz}$ , $V_O = 2V_{\text{PP}}$		-68		dBc
		$f = 1\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-62		
		$f = 2\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-61		
		$f = 3\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-51		
		$f = 4\text{GHz}$ , $V_O = 2V_{\text{PP}}$		-47		
OIP2	Output second-order intercept point	$f = 500\text{MHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		85		dBm
		$f = 1\text{GHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		71.5		
		$f = 2\text{GHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		64		
		$f = 3\text{GHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		58		
		$f = 4\text{GHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		54.5		
		$f = 5\text{GHz}$ , $P_O = 1\text{dBm}$ per tone, 2MHz spacing		56.5		

## 6.5 Electrical Characteristics - TRF1305B1 (続き)

at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{ICM} = \text{midsupply}$ , D2D ac-coupled input/output with differential source impedance ( $Z_S = 100\Omega$ ), differential output load ( $Z_L = 100\Omega$ ), external input resistor network (see [8-3](#)), and inputs de-embedded up to  $R_{IN\_SER}$  and outputs up to the device pins (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
OIP3	Output third-order intercept point	f = 500MHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		43.5		dBm
		f = 1GHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		40		
		f = 2GHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		34		
		f = 3GHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		32		
		f = 4GHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		25.5		
		f = 5GHz, P <sub>O</sub> = 1dBm per tone, 2MHz spacing		19		
NF	Noise figure	f = 500MHz		8		dB
		f = 1GHz		8.8		
		f = 2GHz		10.4		
		f = 4GHz		13.4		
		f = 5GHz		13.3		
NSD	Output noise spectral density	f = 500MHz		-155.3		dBm/Hz
		f = 1GHz		-154.8		
		f = 2GHz		-153.8		
		f = 4GHz		-150.7		
		f = 5GHz		-150.7		
<b>DC PERFORMANCE</b>						
V <sub>OD-MAX</sub>	Max differential output voltage	f = 1GHz		4		V <sub>PP</sub>
	Slew rate	2V V <sub>O</sub> step, S2D configuration, V <sub>S+</sub> = 2.5V, V <sub>S-</sub> = -2.5V		25		kV/μs
	Output differential offset voltage			±3		mV
	Overdrive recovery time	From 2 × overdrive of each SE output to each output voltage settling to < ±50mV		6		ns
<b>COMMON-MODE</b>						
V <sub>ICM</sub>	Input common-mode voltage	Default range <sup>(1)</sup>	V <sub>S-</sub> + 1.5	V <sub>S-</sub> + 3.5		V
V <sub>OCM</sub>	Output common-mode voltage		V <sub>S-</sub> + 2	V <sub>S-</sub> + 3		V
	Output common-mode offset voltage from V <sub>OCM</sub> voltage			±10		mV
<b>IMPEDANCE</b>						
Z <sub>in-SE</sub>	Single-ended input impedance	At INP pin with appropriate termination on INM pin		47		Ω
Z <sub>O-DIFF</sub>	Differential output impedance	f = near dc		8		Ω

## 6.5 Electrical Characteristics - TRF1305B1 (続き)

at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}}$  = midsupply, D2D ac-coupled input/output with differential source impedance ( $Z_S$ ) = 100Ω, differential output load ( $Z_L$ ) = 100Ω, external input resistor network (see [図 8-3](#)), and inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>POWER SUPPLY</b>						
$I_{\text{QA}}$	Active quiescent current			102		mA
$I_{\text{QPD}}$	Power-down quiescent current			25		mA
<b>POWER DOWN</b>						
$V_{\text{PD\_Hi}}$	PD pin logic high	Referenced to PAD, see <a href="#">セクション 6.1</a>	1.35			V
$V_{\text{PD\_Lo}}$	PD pin logic low	Referenced to PAD, see <a href="#">セクション 6.1</a>			0.3	V
$I_{\text{PD\_Bias}}$	PD bias current (current on PD pin)	PD = high (1.8V logic)		15		μA
		PD = high (3.3V logic)		30		
$t_{\text{ON}}$	Turn-on time	From 50% $V_{\text{PD}}$ transition to 90% RF out		25		ns
$t_{\text{OFF}}$	Turn-off time	From 50% $V_{\text{PD}}$ transition to 10% RF out		20		ns

(1)  $V_{\text{ICM}}$  range can be extended closer to  $V_{S+}$  or  $V_{S-}$  in D2D configuration. See also [セクション 7.4.1](#).

## 6.6 Typical Characteristics - TRF1305B1


at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

ADVANCE INFORMATION

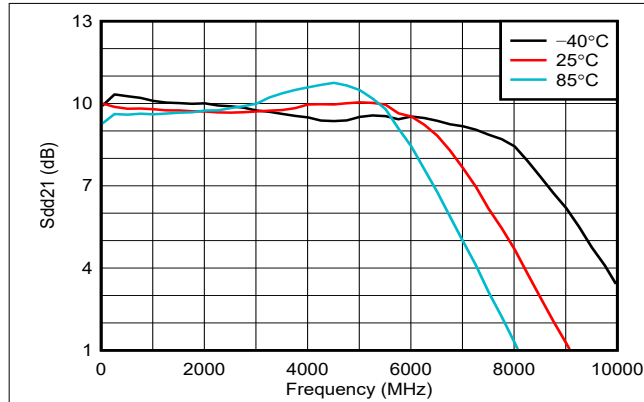


$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-1. Power Gain (S21) Across Temperature

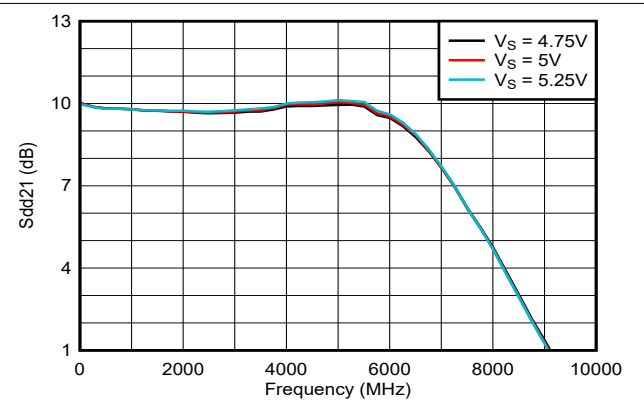


$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-2. Power Gain (S21) Across Supply Voltage

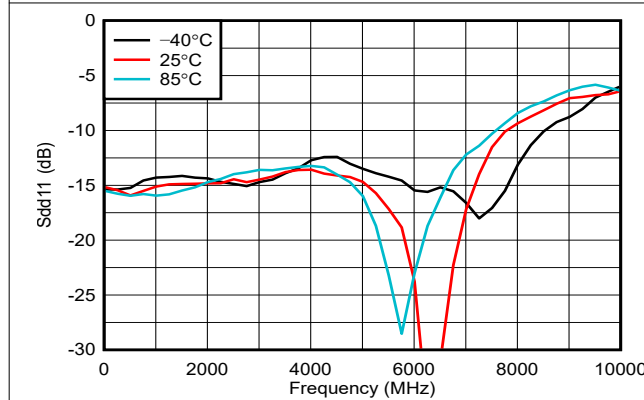


$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-3. Input Return Loss (S11) Across Temperature

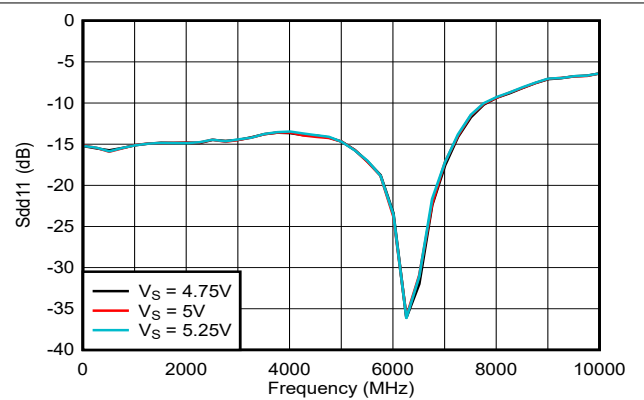


$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-4. Input Return Loss (S11) Across Supply Voltage

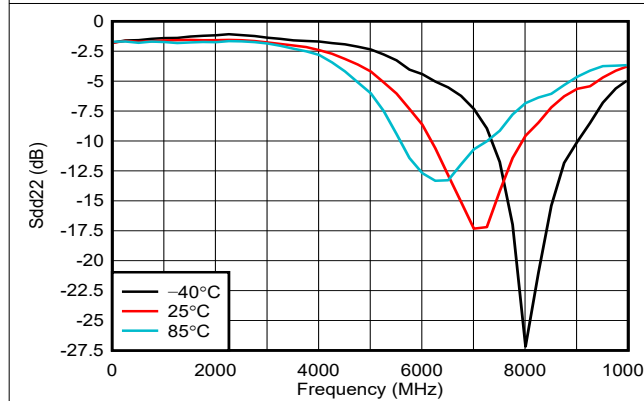

$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-5. Output Return Loss (S22) Across Temperature

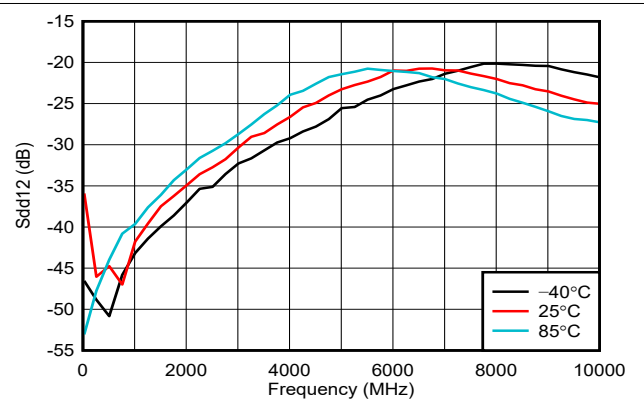


$P_{\text{IN}} = -20\text{dBm}$  at each input pin with  $50\Omega$  source

Figure 6-6. Reverse Isolation (S12) Across Temperature




## 6.6 Typical Characteristics - TRF1305B1 (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

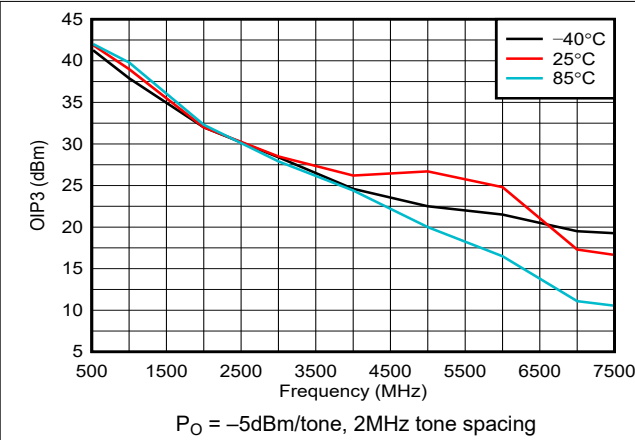


6-7. OIP3 Across Temperature

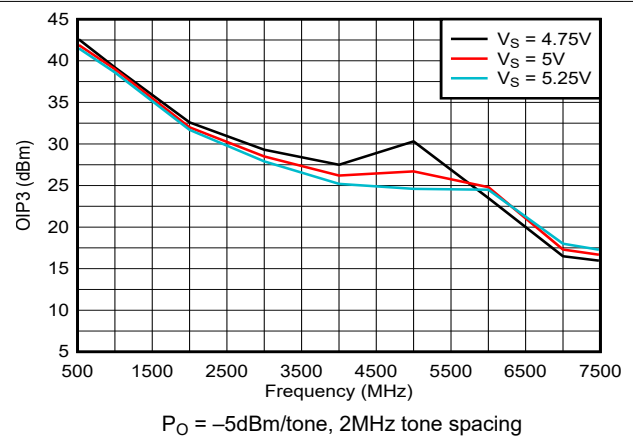


6-8. OIP3 Across Supply Voltage

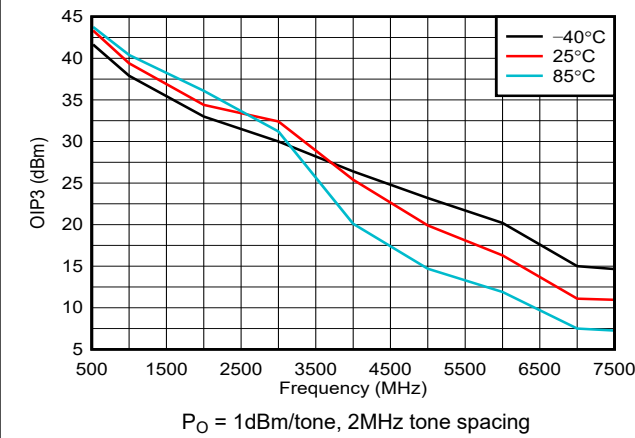


6-9. OIP3 Across Temperature

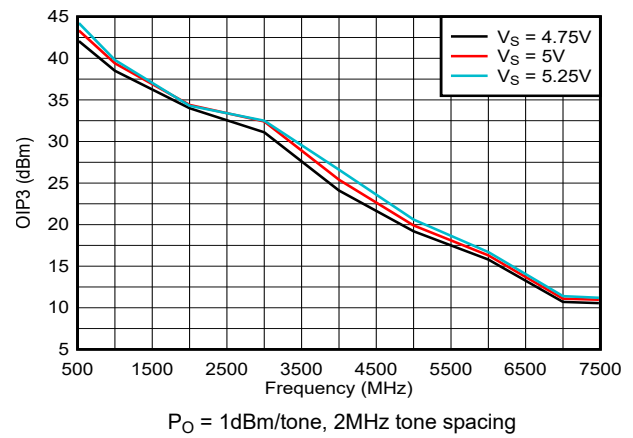

6-10. OIP3 Across Supply Voltage

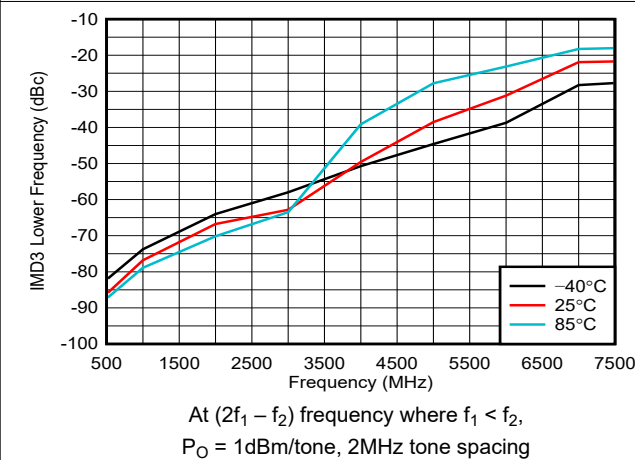


6-11. IMD3 Lower Across Temperature

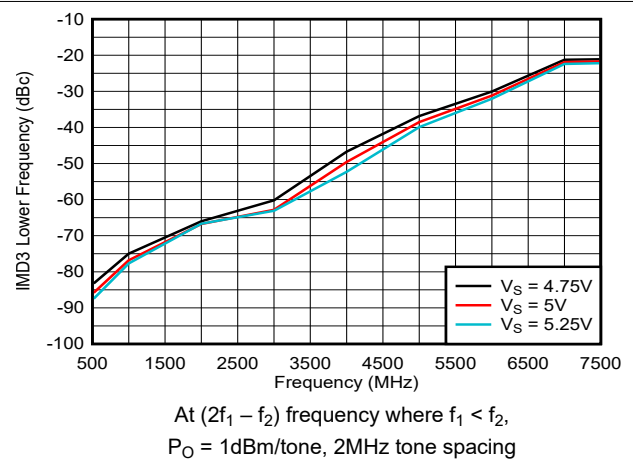


6-12. IMD3 Lower Across Supply Voltage

### 6.6 Typical Characteristics - TRF1305B1 (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

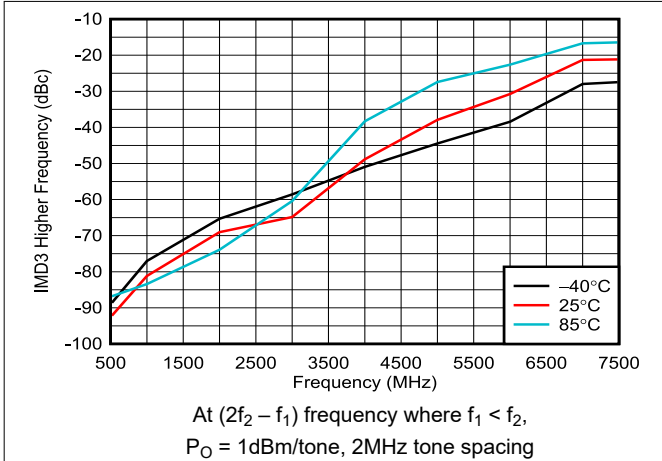


6-13. IMD3 Higher Across Temperature

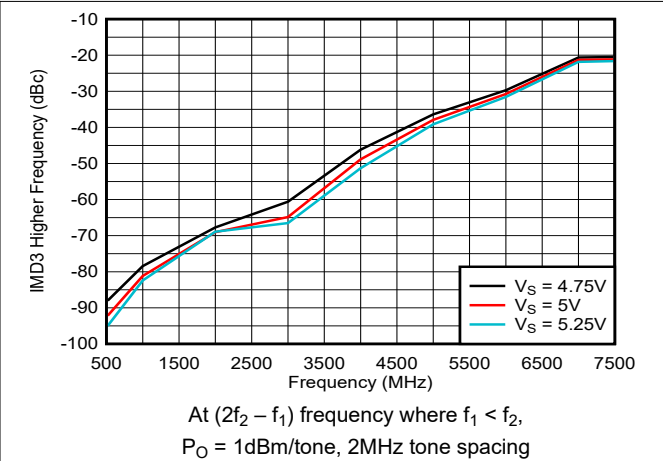


6-14. IMD3 Higher Across Supply Voltage

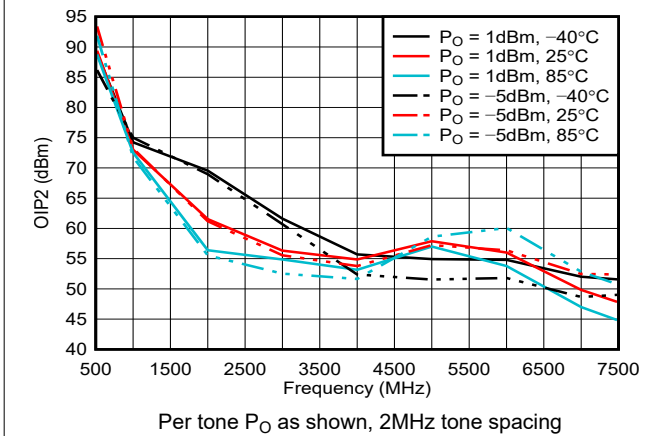


6-15. OIP2 Across Temperature

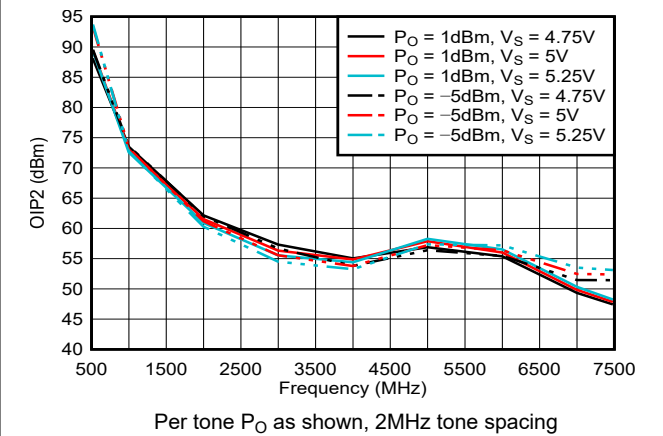

6-16. OIP2 Across Supply Voltage

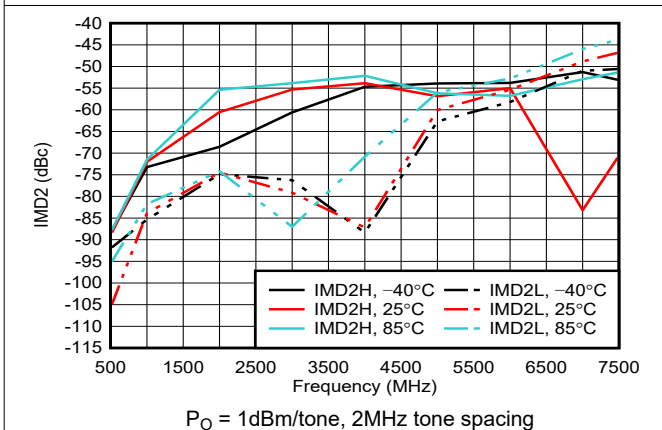


6-17. IMD2 Across Temperature

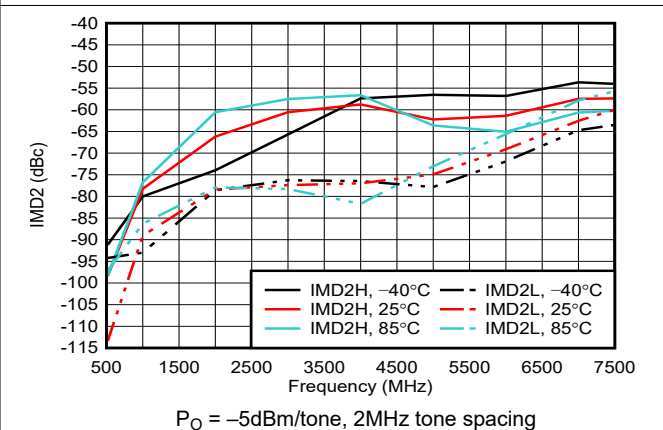


6-18. IMD2 Across Temperature

## 6.6 Typical Characteristics - TRF1305B1 (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{mid supply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

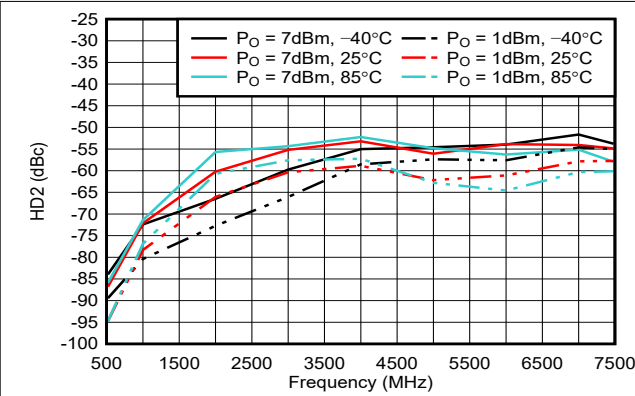


6-19. HD2 Across Output Power and Temperature

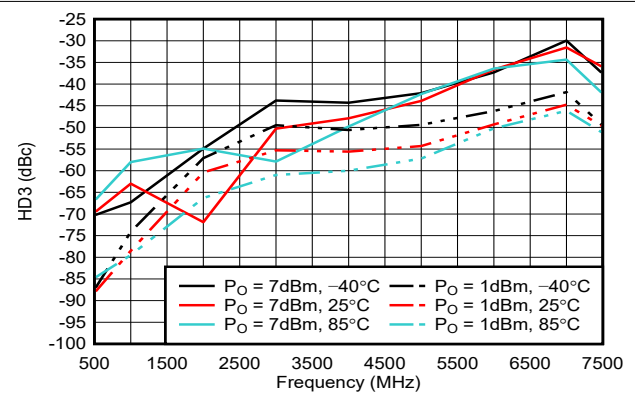


6-20. HD3 Across Output Power and Temperature

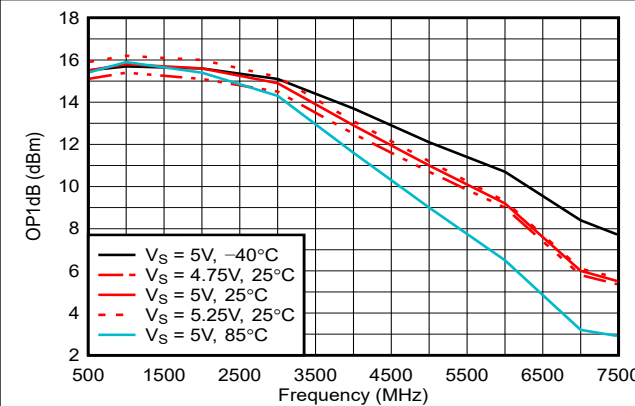


6-21. OP1dB Across Supply Voltage and Temperature

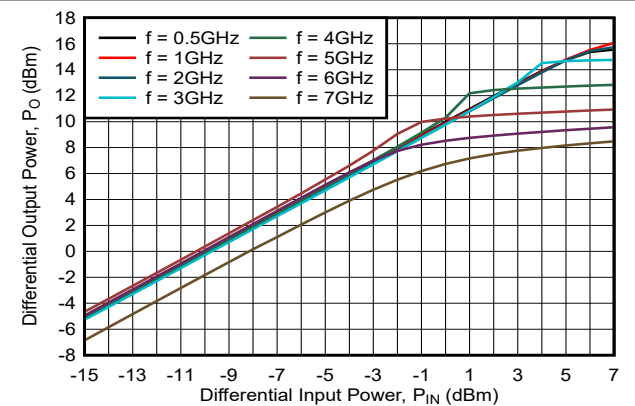

6-22. Differential Input vs Differential Output Power

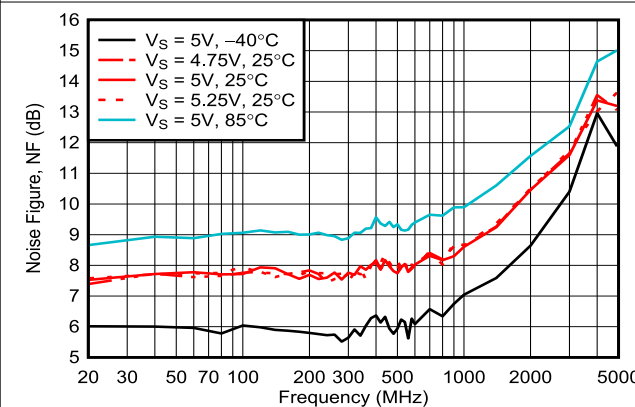

6-23. Noise Figure Across Temperature

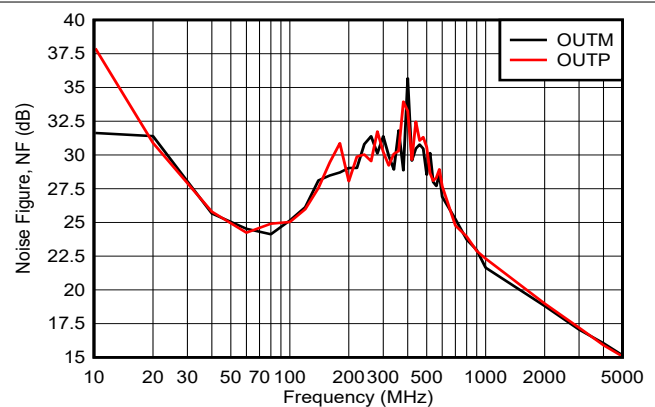

6-24. Noise Figure at Each Single-Ended Output

### 6.6 Typical Characteristics - TRF1305B1 (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

ADVANCE INFORMATION

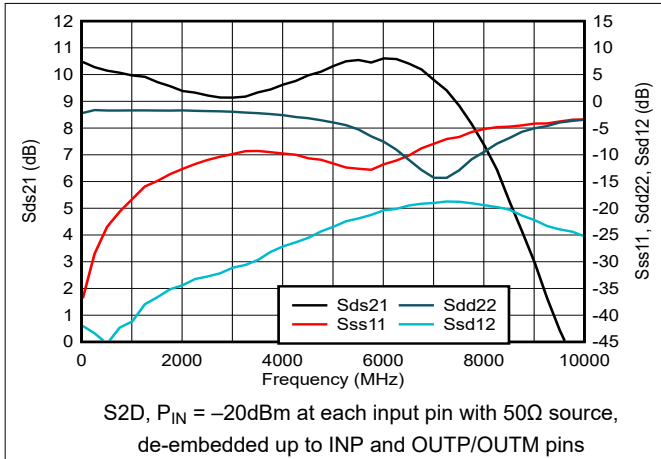


Figure 6-25. S-Parameters in S2D Configuration

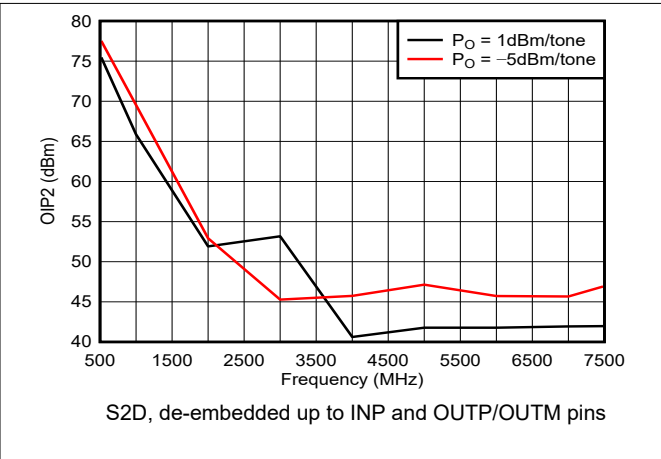


Figure 6-26. OIP2 Across Output Power

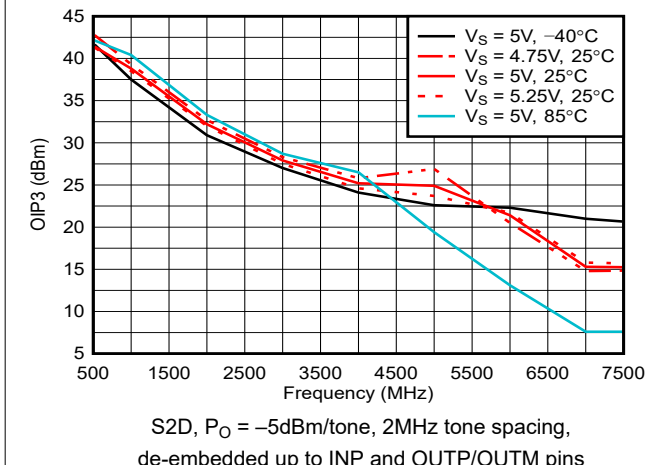


Figure 6-27. OIP3 Across Supply Voltage and Temperature




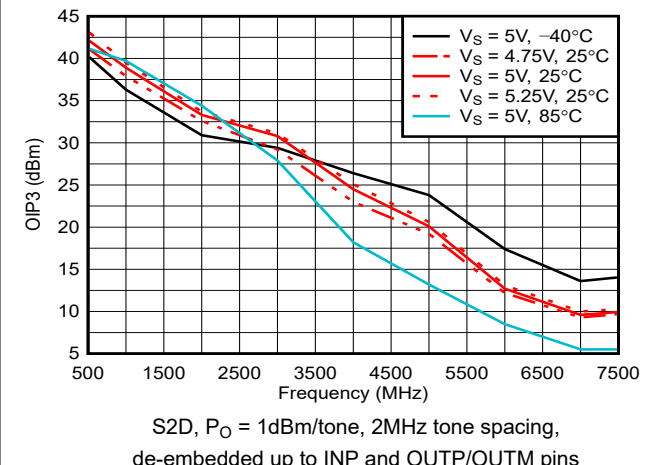


Figure 6-28. OIP3 Across Supply Voltage and Temperature

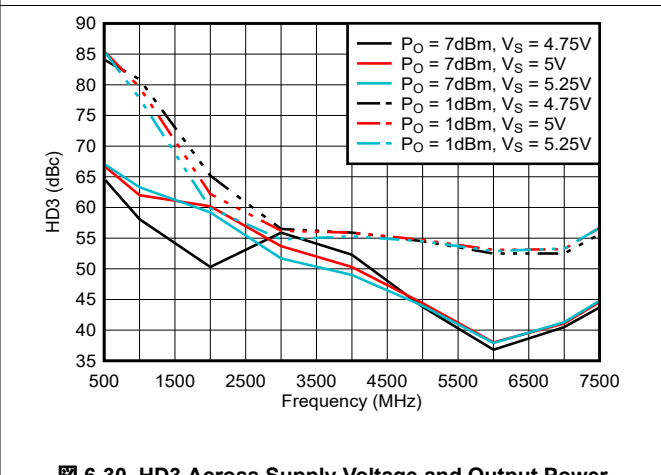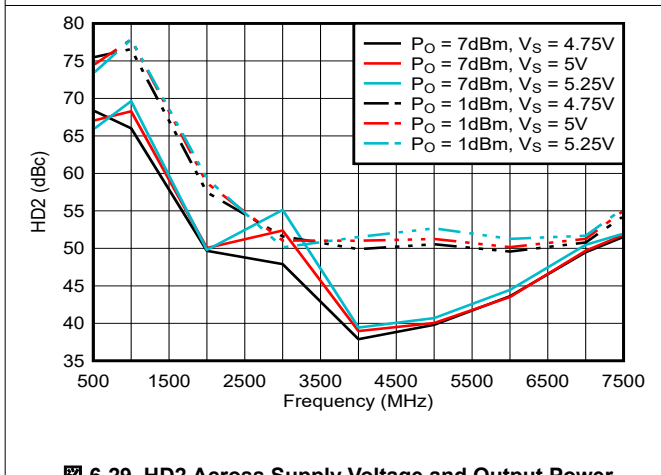


## 6.6 Typical Characteristics - TRF1305B1 (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{S+} = 5\text{V}$ ,  $V_{S-} = 0\text{V}$ , floating VO<sub>CM</sub>, PD, and MODE pins,  $V_{\text{ICM}} = \text{midsupply}$ , D2D ac-coupled input/output configuration with  $Z_S = 100\Omega$ ,  $Z_L = 100\Omega$ , external input resistor network (see [8-3](#)), inputs de-embedded up to  $R_{\text{IN\_SER}}$  and outputs up to the device pins, ambient temperatures shown, and resistor network included as part of DUT characteristic plots (unless otherwise noted)

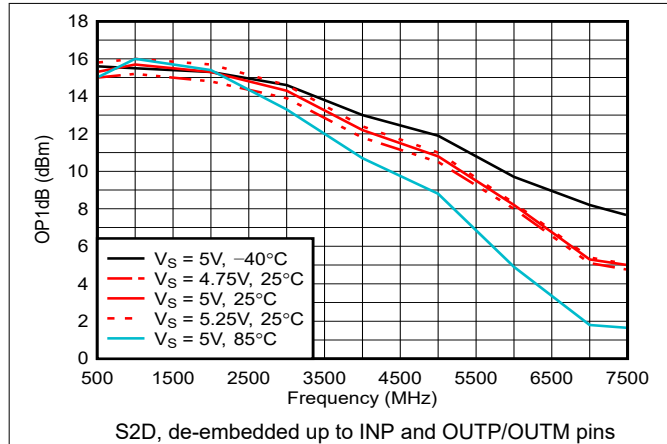


6-31. OP1dB Across Supply Voltage and Temperature

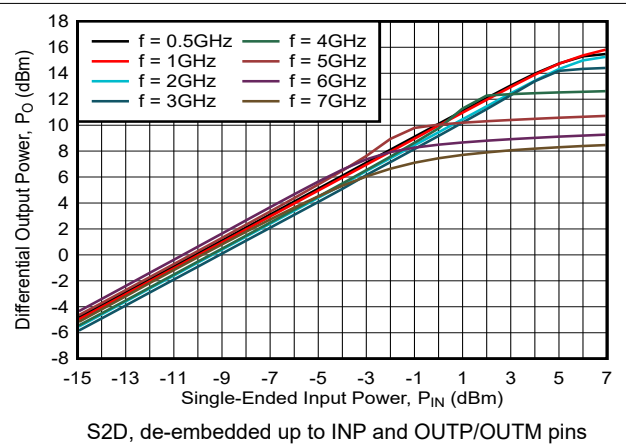

6-32. Single-Ended Input vs Differential Output Power

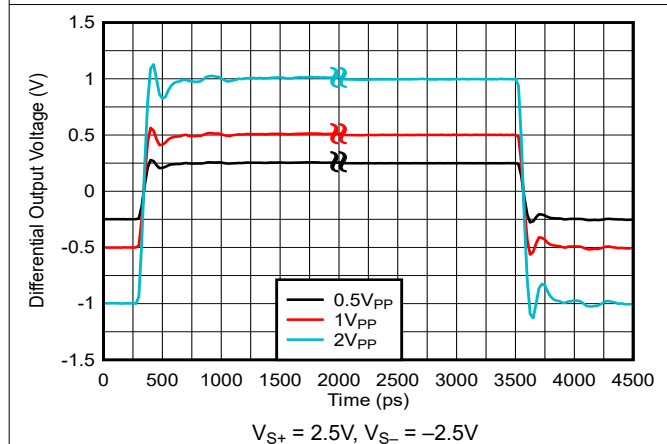

6-33. Step Response

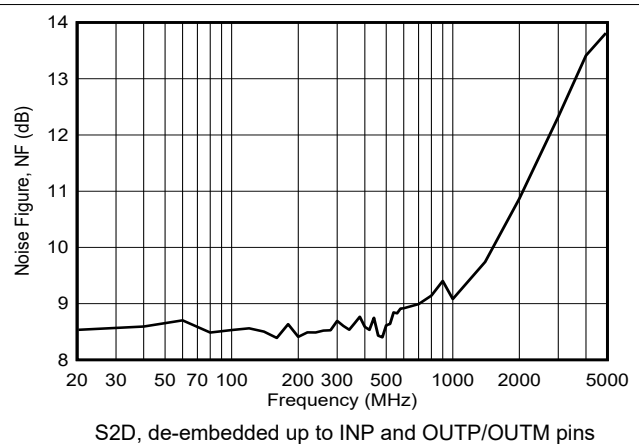

6-34. Noise Figure in S2D Configuration

## 7 Detailed Description


### 7.1 Overview

The TRF1305A1, TRF1305B1, and TRF1305C1 (TRF1305x1) devices are シングル チャネル, high-performance fully differential RF amplifiers optimized for very wideband signals from dc to > 6.5GHz. This device family is primarily designed to interface with high-speed and RF data converters that often require differential input (ADCs) and output (DACs) signaling. The TRF1305x1 can be dc or ac coupled, and configured as single-ended input and differential output (S2D) or differential input and differential output (D2D). The devices feature an output common-mode pin (VOCM) that allows the flexibility to set a desired common-mode output voltage. The amplifier allows the data converters to interface with a dc-coupled IQ demodulator or modulator if used in a direct conversion system. The TRF1305x1 family comes in three fixed power gain variants (15dB, 10dB, and 5dB), and has a closed-loop feedback-amplifier architecture.

The devices are powered using two-rail supplies with a typical differential voltage of 5V between the positive and negative supplies, and usable in split- or single-supply configurations. A power-down feature is also available that allows the amplifier to be powered down.

The output of the amplifiers is low impedance. Use appropriate external series termination to match to an arbitrary impedance.

### 7.2 Functional Block Diagram

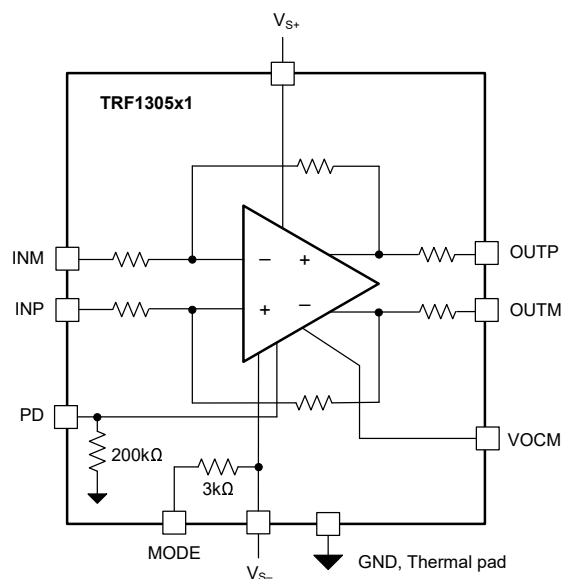

### 7.3 Feature Description

The TRF1305x1 includes the following key features:

- Two-rail floating supply with supply-independent thermal pad
  - Connect the thermal pad to GND or  $V_{S-}$
  - RF signals and PD pin are referenced to thermal pad
- Single-supply or split-supply operation
- Supports single-ended and differential input configurations
- Performance-optimized preset fixed-gain variants
- Output common-mode control
- Input common-mode range selection by pullup resistor
- MODE pin:  $V_{ICM}$  range extension closer to  $V_{S+}$  or  $V_{S-}$  modes
- Digital-logic-controllable power-down option

### 7.3.1 Fully Differential RF Amplifier

The TRF1305x1 is a voltage-feedback fully differential amplifier (FDA) with wide bandwidth. The amplifier is designed for a differential power gain of 15dB, 10dB, or 5dB depending on the device variant. This amplifier has excellent time-domain specifications with high slew rate, high input and output common-mode ranges, and fast transient settling time.

The output average voltage (common-mode) of the FDA device is controlled by a separate common-mode loop. The target output common-mode voltage is set by the VOCCM input pin.

### 7.3.2 Output Common-Mode Control

Figure 7-1 shows a functional diagram of the output common-mode control. Internally, the VOCCM pin potential is set by the LDO output voltage that is equal to  $V_{S-} + 2.5V$  connected through a 2.5kΩ resistor.

Floating the VOCCM pin is allowed. The output common-mode voltage at the output pins, OOTP and OOTM, defaults to the LDO output voltage of  $V_{S-} + 2.5V$  when VOCCM pin is floated. Floating the VOCCM pin results in a  $V_{OCCM}$  voltage equal to midsupply when  $V_S = 5V$ . If the VOCCM pin is driven, then drive the pin from a low-impedance source. Limit the value of  $R_{OCCM}$  to less than 25Ω for accurate reflection of the forced  $V_{OCCM}$  voltage at the device outputs.

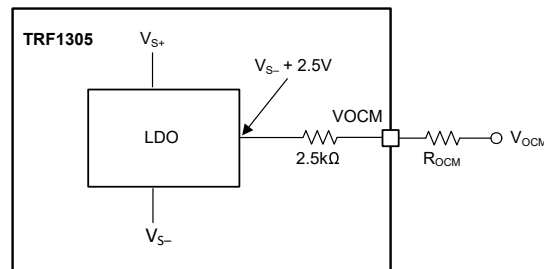


Figure 7-1. Output Common-Mode Control

### 7.3.3 Internal Resistor Configuration

Figure 7-2 shows the internal resistor configurations of TRF1305x1. Table 7-1 provides the values of these resistors for different gain variants.




Figure 7-2. TRF1305x1 Internal Resistor Configuration

Table 7-1. Resistor Values

DEVICE NAME	GAIN (dB)	$R_G$ (Ω)	$R_F$ (Ω)	$R_O$ (Ω)
TRF1305A1	15	6.25	258	4
TRF1305B1	10	12.5	161	4
TRF1305C1	5	17	97	4



## 7.4 Device Functional Modes

### 7.4.1 MODE Pin

The TRF1305x1 have additional useful features that can be configured using the MODE pin. To select the device mode, either connect a  $\pm 2\%$  maximum tolerance pullup resistor between the MODE pin and  $V_{S+}$ , or force a voltage on the MODE pin. Internally, the MODE pin is referenced to  $V_{S-}$  through a 3k $\Omega$  resistor (see [セクション 7.2](#)).

[表 7-2](#) provides the value of the pullup resistor for each mode, the expected voltage,  $V_{MODE}$ , at the MODE pin when the pullup resistor is used or the necessary  $V_{MODE}$  voltage to set the device mode, and the mode configurations. The  $V_{MODE}$  voltage thresholds are approximately midway between the adjacent modes typical  $V_{MODE}$  voltage. If the mode functionality is used, use a decoupling capacitor on the MODE pin.

**表 7-2. MODE Pin Configuration**

MODE NUMBER	PULLUP RESISTOR TO $V_{S+}$ ( $\pm 2\%$ MAXIMUM TOLERANCE)	MODE PIN VOLTAGE, $V_{MODE}$ (V)	$V_{ICM}$ RANGE EXTENSION <sup>(1)</sup>
0	OPEN	$V_{S-}$	Default $V_{ICM}$ range
1	25.6k $\Omega$	$V_{S-} + 0.5V$	Low side, extends $V_{ICM}$ range closer to $V_{S-}$
2	12.8k $\Omega$	$V_{S-} + 0.95V$	High side, extends $V_{ICM}$ range closer to $V_{S+}$
N/A	Do not use pullup resistor < 10k $\Omega$ or set $V_{MODE} > V_{S-} + 1.15V$		

(1) Only available in D2D configuration.

To switch the mode without turning the supplies off, use a switch or MUX connected between the pullup resistor options and  $V_{S+}$ , or force a mode-appropriate  $V_{MODE}$  voltage. However, powering down the device using the [power-down feature](#) between mode changes is preferred. The low-side and high-side  $V_{ICM}$  range extension modes source and sink currents, respectively (see also [セクション 7.4.1.1](#)). Ensure that the external circuitry is ready to sink or source these currents before the device is put in the active mode from the powered-down state.

#### 7.4.1.1 Input Common-Mode Extension

The TRF1305x1 supports a  $V_{ICM}$  voltage closer to either  $V_{S+}$  or  $V_{S-}$  voltage than the default specified input common-mode range in the *Electrical Characteristics*, when configured in one of the  $V_{ICM}$  extension modes. The  $V_{ICM}$  extension mode can only be used in D2D configuration.

When configured in the low-side  $V_{ICM}$  extension mode, TRF1305B1 supports a 450mV lower input common-mode voltage than the default option. For example, the lower limit of  $V_{ICM}$  voltage range extends from a default value of  $V_{S-} + 1.5V$  to  $V_{S-} + 1.05V$  for the TRF1305B1 variant, and the higher limit also shifts lower from a default value of  $V_{S-} + 3.5V$  to  $V_{S-} + 3.05V$ . At the lowest  $V_{ICM}$  voltage, approximately 15mA current must be sunk by the external circuitry connected to the INP and INM pins.

When configured in the high-side  $V_{ICM}$  extension mode, TRF1305B1 supports a 450mV higher input common-mode voltage than the default option. For example, the higher limit of  $V_{ICM}$  voltage range extends from a default value of  $V_{S-} + 3.5V$  to  $V_{S-} + 3.95V$  for the TRF1305B1 variant, and the lower limit also shifts up from a default of  $V_{S-} + 1.5V$  to  $V_{S-} + 1.95V$ . At the highest  $V_{ICM}$  voltage, approximately 15mA current must be sourced by the external circuitry connected to the INP and INM pins.

Either resistors connected to supplies or external current sources can be used to sink or source the currents flowing out or into to the INP and INM pins during the low-side or high-side  $V_{ICM}$  extension modes, respectively.

### 7.4.2 Power-Down Mode

The TRF1305x1 have two bias modes, active and power-down, that are controlled by the voltage on the PD pin. The PD pin is referenced to the thermal pad through a 200k $\Omega$  resistor; see also [セクション 7.2](#). If the  $V_{S+} \geq 3.3V$  configuration is used, ensure that the PD voltage does not exceed the *Absolute Maximum Ratings* in case the high PD voltage is derived from  $V_{S+}$ .

Both 1.8V and 3.3V digital logic is supported for power down control.



## 8 Application and Implementation

### 注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくこととなります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。


### 8.1 Application Information

#### 8.1.1 Input and Output Interface Considerations

##### 8.1.1.1 Single-Ended Input

In the single-ended input configuration, one of the amplifier input pins is driven from a source while the other input is terminated with an external resistor. [図 8-1](#) shows an ac-coupled, single-ended input configuration driven from and matched to a 50Ω source. [図 8-1](#) shows how the non-driven INM pin is terminated with a 50Ω external resistor to match to a source with the same 50Ω impedance at the INP pin. The configuration shown in [図 8-1](#) works for all gain versions of TRF1305x1.

To configure the design in [図 8-1](#) for single-ended, dc-coupled input, replace the ac-coupling capacitors with shorts, and externally bias both INP and INM pins to a voltage close to the mid-supply or within the common-mode limits of the amplifier.

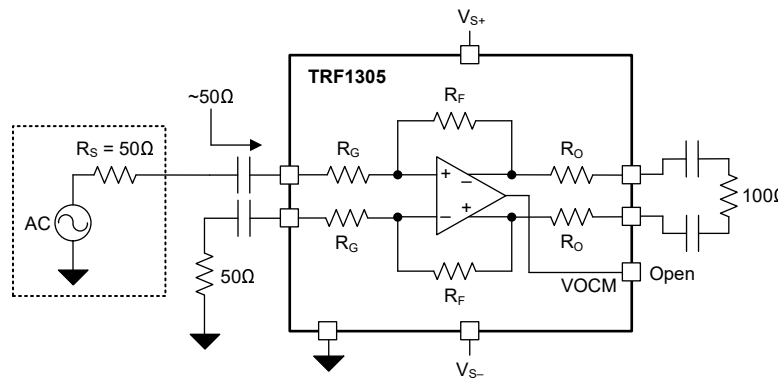

**図 8-1. AC-Coupled, Single-Ended Input Matched to a 50Ω Source**

##### 8.1.1.2 Differential Input

[図 8-2](#) shows how a simple network consisting of three resistors is used to match the differential input to a 100Ω differential source. Though the 1kΩ shunt resistor,  $R_{IN\_SH}$ , does not have any impact at dc to low frequencies, the resistor is necessary to get the full wideband performance from TRF1305x1. [図 8-3](#) shows the configuration for ac-coupled differential input designs. The resistors values shown in [図 8-2](#) and [図 8-3](#) work for all gain versions of the TRF1305x1 for an 100Ω input match to a 100Ω differential source.

Use small foot-print resistors (0201 preferred), and RF quality for high frequency matching.

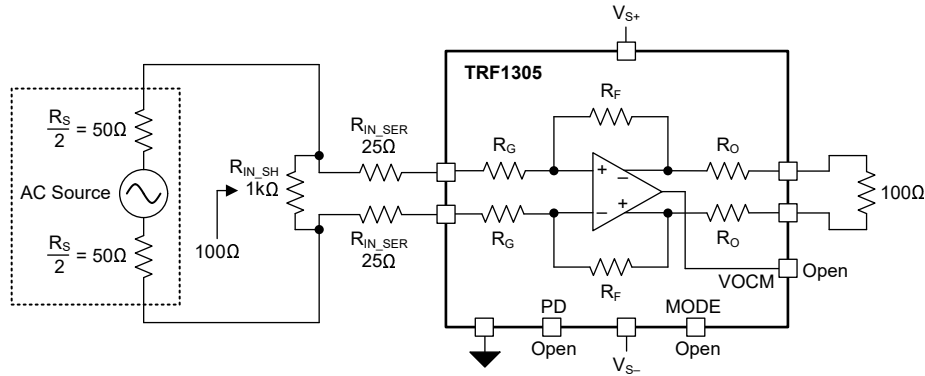


图 8-2. DC-Coupled Differential Input Matched to a 100Ω Differential Source

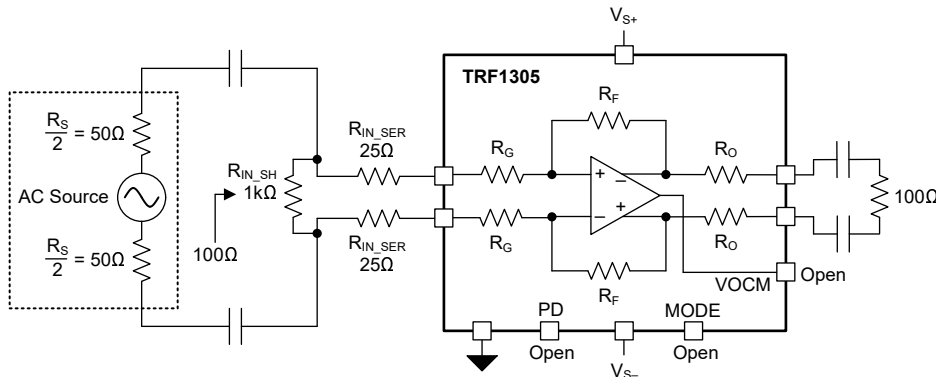


图 8-3. AC-Coupled Differential Input Matched to a 100Ω Differential Source

ADVANCE INFORMATION

### 8.1.1.3 DC Coupling Considerations

The TRF1305x1 accepts a wide range of input dc common-mode (CM) voltages. Take into consideration the dc current loading of the source when the TRF1305x1 is dc-coupled at the input. 图 8-4 shows that when the input CM voltage,  $V_{ICM}$ , is different than the output CM voltage,  $V_{OCM}$ , a net dc current flow from or to the source occurs. 式 1 shows the relationship that the source or sink current,  $I_{CM}$ , has with the input and output CM voltages:

$$I_{CM} = \frac{(V_{OCM} - V_{ICM})}{(R_F + R_G)} \quad (1)$$


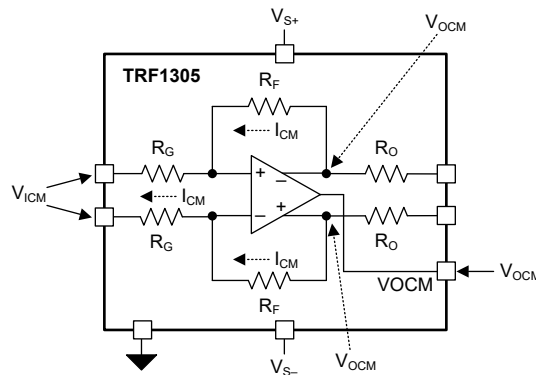


图 8-4. Net DC Current Flow When Input and Output Common-Mode Voltages are not Equal

### 8.1.2 Gain Adjustment With External Resistors in a Differential Input Configuration

The TRF1305x1 allow minor gain adjustments by configuring the input external resistive network that is part of the differential input configuration. 8-5 shows the external input network that comprises of a shunt resistor,  $R_{IN\_SH}$ , and two series input resistors,  $R_{IN\_SER}$ , connected to the input pins of the amplifier.

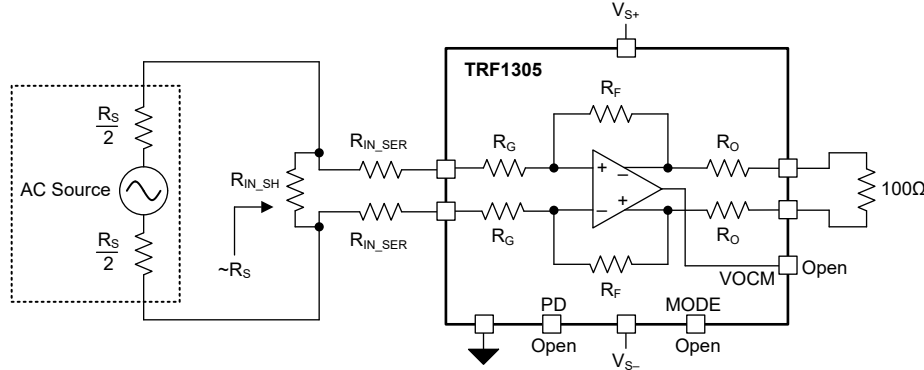

8-5. Gain Adjustment With External Resistor Network

表 8-1 provides resistor configurations for a 100Ω differential source impedance.

表 8-1. Resistor Table for  $R_S = 100\Omega$

TRF1305B1		
POWER GAIN (dB)	$R_{IN\_SH}$ ( $\Omega$ )	$R_{IN\_SER}$ ( $\Omega$ )
10	1000	25
9	408	30
8	267	35
7	204	41
6	169	47
5	146	54

Use external resistive attenuation network only for small gain adjustments because there is a dB-to-dB noise figure degradation with the resistive attenuators. Use an amplifier version that requires minimal attenuation for achieving the overall gain.


For example, to realize 10dB overall gain with  $R_S = 100\Omega$  differential, the two options are:

1. TRF1305B1 with  $R_{IN\_SH} = 1000\Omega$  and  $R_{IN\_SER} = 25\Omega$  resistors
2. TRF1305A1 with  $R_{IN\_SH} = 125\Omega$  and  $R_{IN\_SER} = 49\Omega$  resistors

Option 1 is recommended because the NF is better by approximately 3dB compared to option 2.

## 8.2 Typical Application

### 8.2.1 TRF1305x1 as ADC Driver in a Zero-IF Receiver

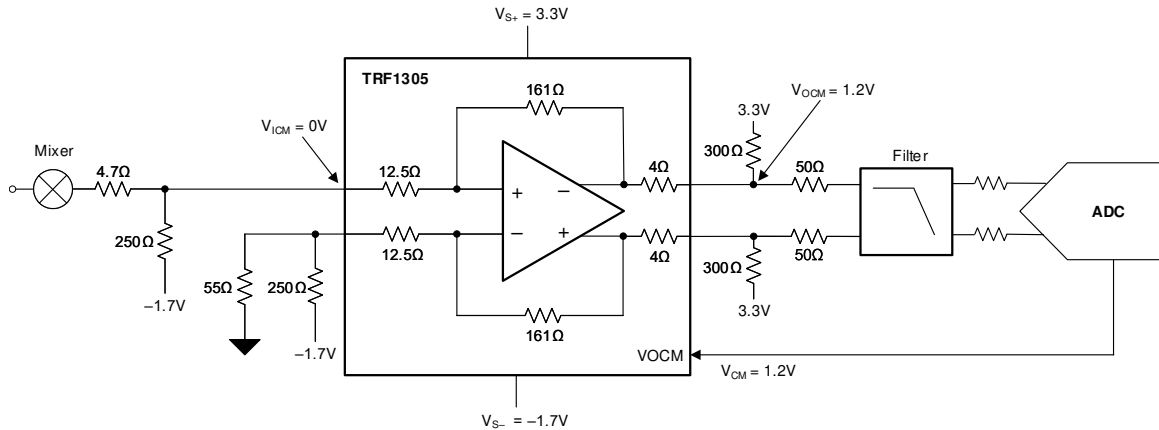

8-6. TRF1305x1 as ADC Driver in a Zero-IF Receiver


Consider a zero-IF (direct down conversion) application with an IQ demodulator interfaced to a pair of ADCs. In this case, the TRF1305x1 is used as an interface amplifier between the demodulator and the ADCs. The dc common-mode of the demodulator output and ADC input are different. The TRF1305x1 dc couples the demodulator to ADC without degrading the signal integrity of the signal chain.

#### 8.2.1.1 Design Requirements

The primary design requirement for an IQ demodulator application is to interface a pair of passive mixers with an RF ADC. The mixers have a 0-V common-mode voltage. The ADC requires an input common-mode voltage of 1.2V with full-scale swing of 1.35V<sub>PP</sub>. Choose the power supplies, and design the input/output network for the TRF1305x1 as the ADC driver amplifier, to perform the dc level shifting and amplification function.

#### 8.2.1.2 Detailed Design Procedure

The first step is to choose the TRF1305x1 supplies. Ensure that the midsupply voltage,  $V_{MIDSUPPLY}$ , is between the ADC common-mode (CM) voltage and the mixer CM voltage.  $V_{MIDSUPPLY}$  is typically positioned closer to the ADC CM because the output CM range of the amplifier is less than the input CM range. Ensure that the dc of the signal at the input and output of the amplifier are within the valid operating common-mode voltage range. Use the MODE pin for cases where an extended range of the input CM is required.

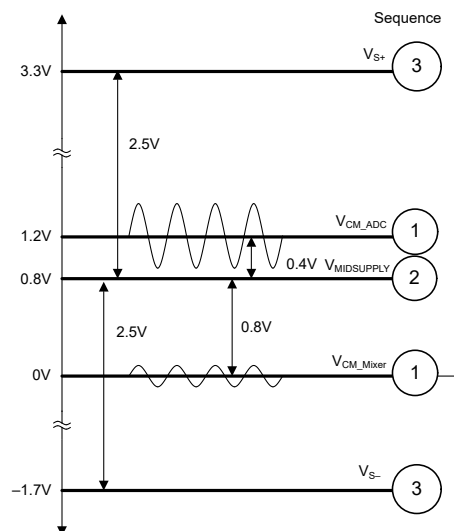

8-7. Choosing Supply Voltages With Given Common-Mode Voltages

☒ 8-7 shows how  $V_{MIDSUPPLY}$  is chosen to be 0.8V, so that the amplifier input has a CM offset from  $V_{MIDSUPPLY}$  of 0.8V and output has a CM offset from  $V_{MIDSUPPLY}$  of 0.4V ( $1.2V - 0.8V$ ). The CM offsets are within the valid common-mode range of the amplifier, so the supplies of the TRF1305B1 are chosen to be  $V_{S+} = 3.3V$  ( $0.8V + 2.5V$ ) and  $V_{S-} = -1.7V$  ( $0.8V - 2.5V$ ).

The output CM is greater than the input CM; therefore, a net 6.9-mA ( $(1.2V - 0V) / (161\Omega + 12.5\Omega)$ ) dc current flows from the output to input through the internal feedback resistors. Depending on the choice of the passive mixer, this current can required to be sunk outside the mixer so that the bias conditions of the mixer are not disturbed. A 250 $\Omega$  pulldown resistor connected to the INP pin to  $-1.7V$  supply is adequate. If the 6.9mA dc current is sourced entirely from the amplifier, then the output headroom can be affected. Therefore, source the current externally from the supply using a pair of pullup resistors connected to the amplifier outputs. 300 $\Omega$  pullup resistors from OOTP and OUTM to 3.3V are adequate.

The I-channel mixer output has a 50 $\Omega$  port and is connected to the amplifier INP pin through a small (4.7 $\Omega$ ) series resistor. The INM pin is terminated to ground through a 55 $\Omega$  resistor and to  $-1.7V$  through a 250 $\Omega$  resistor. This configuration allows the amplifier to have the same input impedance at each of the INP and INM input pins. The impedance of the mixer is close to 43 $\Omega$  and provides better than a  $-20$ -dB return loss (theoretically). Be aware that there is some drop in the gain due to these resistor networks. The values of the resistors chosen in ☒ 8-6 are a good starting point; in practice, some adjustment is often needed to simultaneously meet the dc conditions and the RF performance.

At the amplifier output, 50 $\Omega$  series resistors are used to match to the antialiasing filter with 100 $\Omega$  differential input impedance. The filter output is connected to ADC with appropriate matching. ☒ 8-6 only shows the I-channel; the Q-channel has an identical configuration.

## 8.3 Power Supply Recommendations

### 8.3.1 Supply Voltages

For the TRF1305x1, the typical differential supply between VS+ and VS– is 5V. The VS+ and VS– supply pins can be floated with respect to ground within the specified range listed in the *Absolute Maximum Ratings* and *Recommended Operating Conditions*.

### 8.3.2 Single-Supply Operation

The VS– pin is connected to ground in the single-supply configuration. Single-supply operation is most convenient in ac-coupled configurations because the dc common-mode voltages of the source at the inputs and the driven circuit at the outputs are inherently decoupled.

### 8.3.3 Split-Supply Operation

In split-supply configuration, choose the  $V_{S+}$  and  $V_{S-}$  voltages to be within the ranges specified in the *Absolute Maximum Ratings* and *Recommended Operating Conditions*. The TRF1305x1 allows choosing negative voltages for the  $V_{S-}$  supply, thereby allowing the flexibility to choose input and output common-mode voltages according to the input network and output network requirements.

### 8.3.4 Supply Decoupling

The VS+ and VS– supply pins are decoupled individually to ground using external capacitors. Place the decoupling capacitors close to the device supply pins.

## 8.4 Layout

### 8.4.1 Layout Guidelines

The TRF1305x1 devices are wideband closed-loop feedback amplifiers. When designing with wideband RF amplifiers that have high gain, take certain board layout precautions to maintain stability and optimized performance. Use a multilayer board to maintain signal integrity, power integrity, and thermal performance.

Route the RF input and output lines as grounded coplanar waveguide (GCPW) lines. Ground pins are the reference for the RF signals. Ensure that the second layer of the PCB has a continuous ground layer without any ground cutouts in the vicinity of the amplifier. To minimize phase imbalance, match the length of the output differential lines of both channels. Length matching the input traces is also important, especially if the input configuration is differential. Use small-footprint, passive components wherever possible.


For good heat dissipation, connect the device thermal pad to the board ground planes using thermal vias under the device. For improved heat dissipation, connect the device thermal pad to the top layer ground plane of the board.

#### 8.4.1.1 Thermal Considerations

The TRF1305x1 are packaged in a WQFN-FCRLF package that has excellent thermal properties. Connect the thermal pads underneath the devices to the thermally dissipative ground plane on the board. For good thermal design, use thermal vias to connect the thermal pad plane on the top layer of the PCB to the ground planes in the inner layers.

### 8.4.2 Layout Example

☒ 8-8 shows an example layout for TRF1305x1 with a differential input configuration. Key areas are highlighted in the figure.

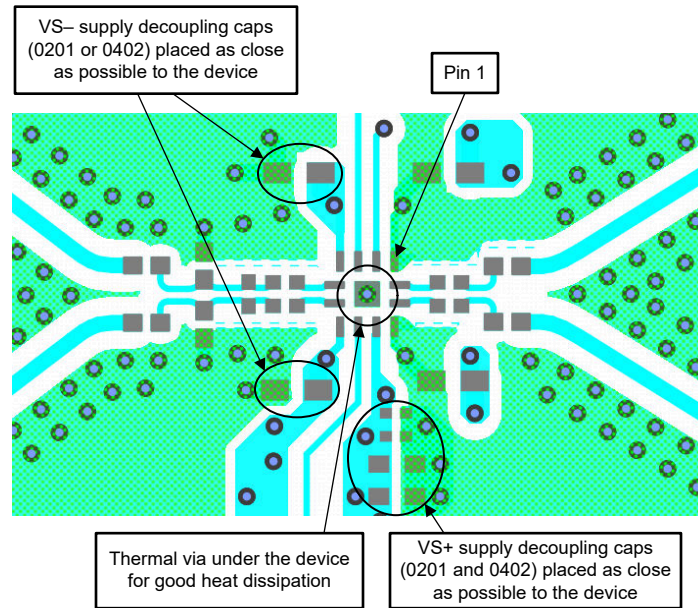

☒ 8-8. Layout Example: TRF1305x1 With Differential Input

The TRF1305x1 can be evaluated using EVM boards that can be ordered from the [TRF1305B1](#) product folder. For more information about the evaluation board construction and test setup, see the [TRF1305x1 EVM User's Guide](#).

## 9 Device and Documentation Support

### 9.1 Documentation Support

#### 9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [TRF1305x1-D2D EVM User's Guide](#)

### 9.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[www.tij.co.jp](http://www.tij.co.jp) のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

### 9.3 サポート・リソース

[テキサス・インスツルメンツ E2E™ サポート・フォーラム](#) は、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

### 9.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 9.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

### 9.6 用語集

[テキサス・インスツルメンツ用語集](#)

この用語集には、用語や略語の一覧および定義が記載されています。

## 10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

DATE	REVISION	NOTES
September 2024	*	Initial Release

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## 重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2024, Texas Instruments Incorporated

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
PTRF1305B1RPVR	ACTIVE	WQFN-HR	RPV	12	3000	TBD	Call TI	Call TI	-40 to 125		Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.



(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

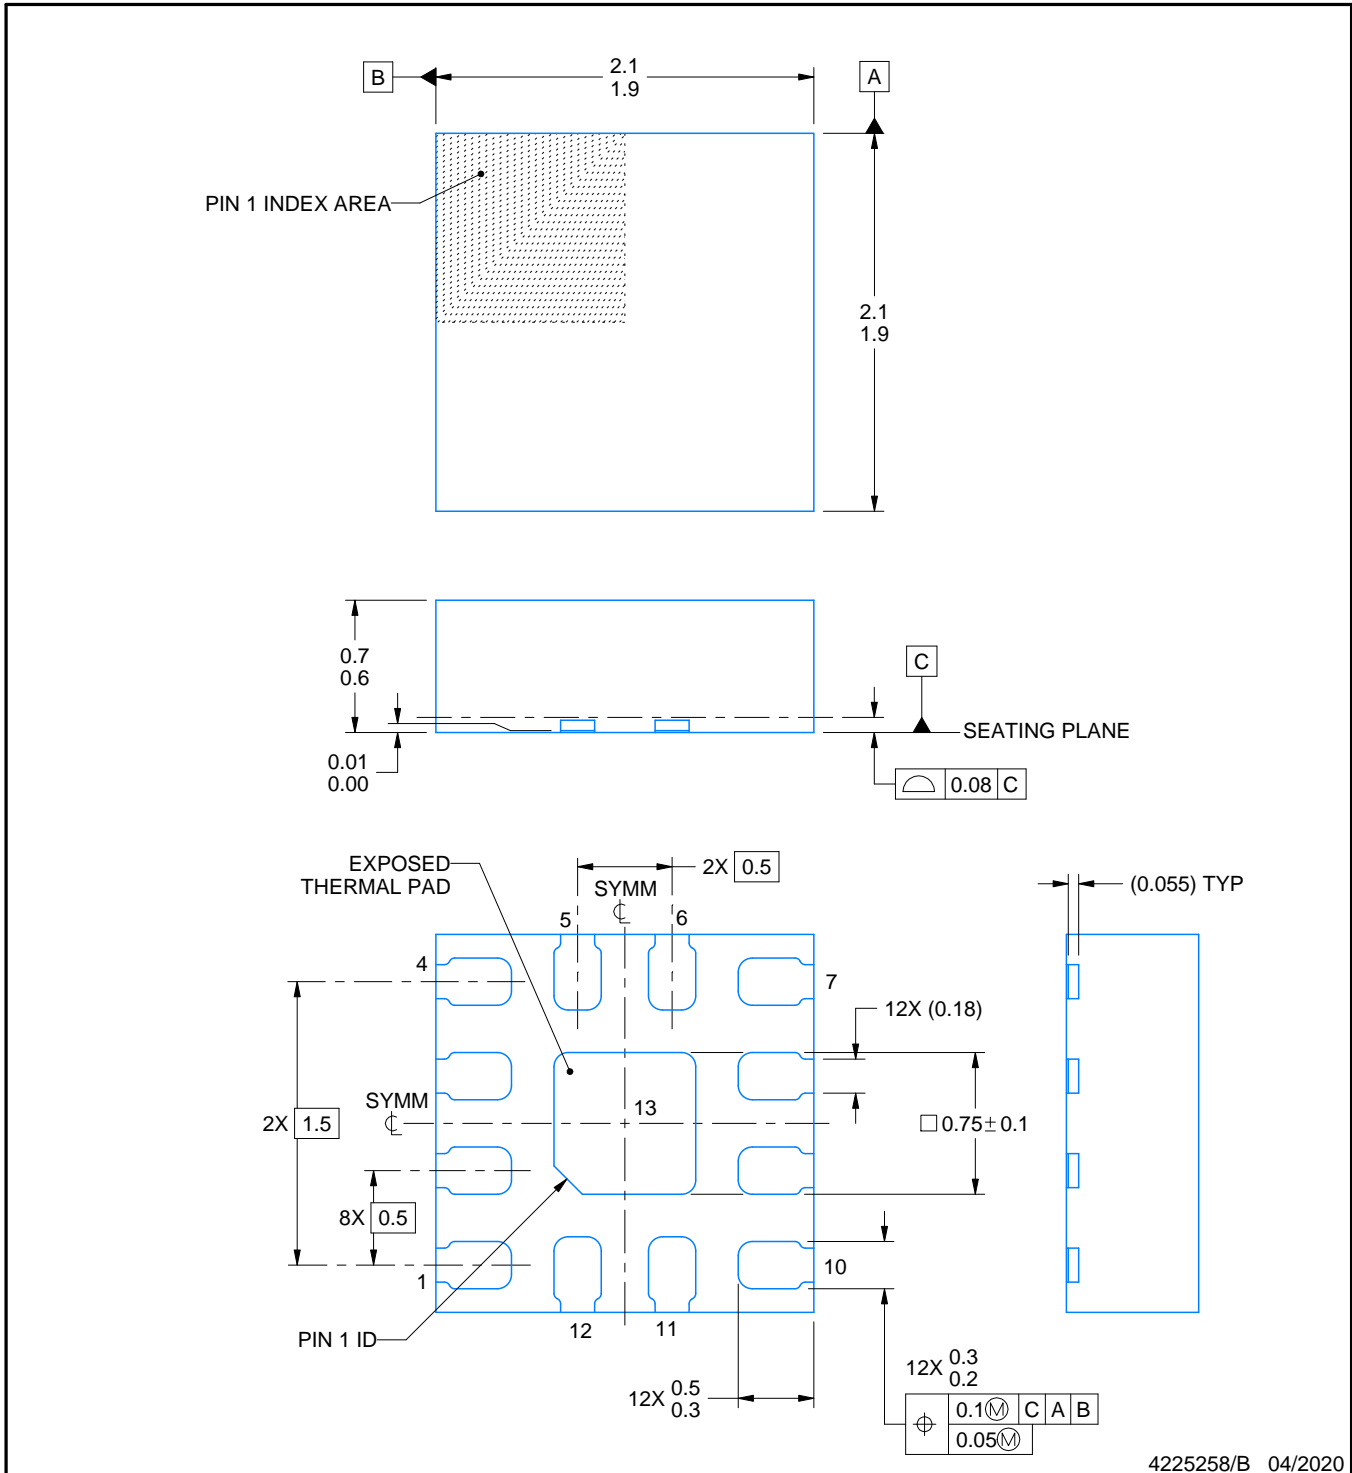

4225258/B 04/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


RPV0012A

WQFN-FCRLF - 0.7 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

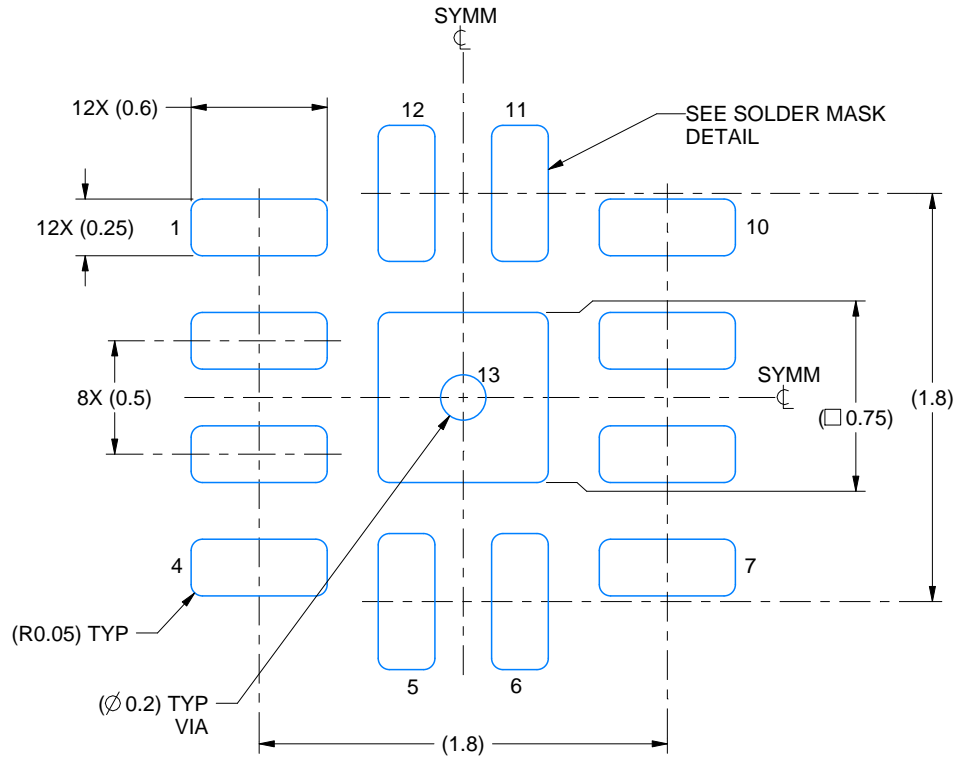

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 30X

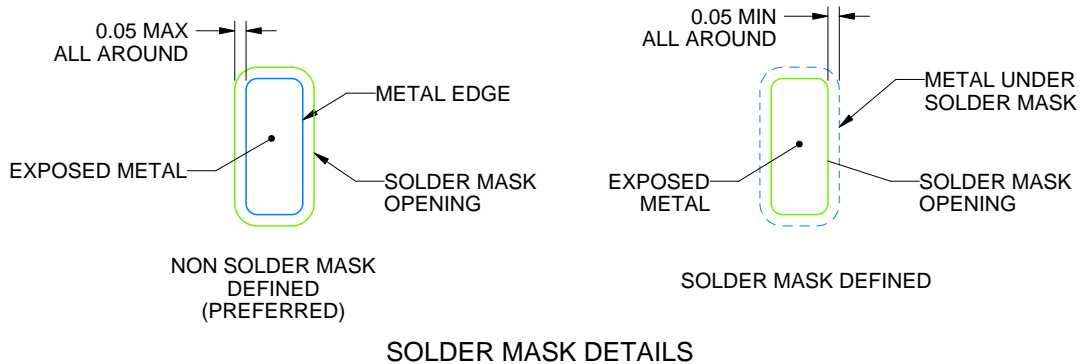

SOLDER MASK DETAILS

4225258/B 04/2020

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RPV0012A

WQFN-FCRLF - 0.7 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

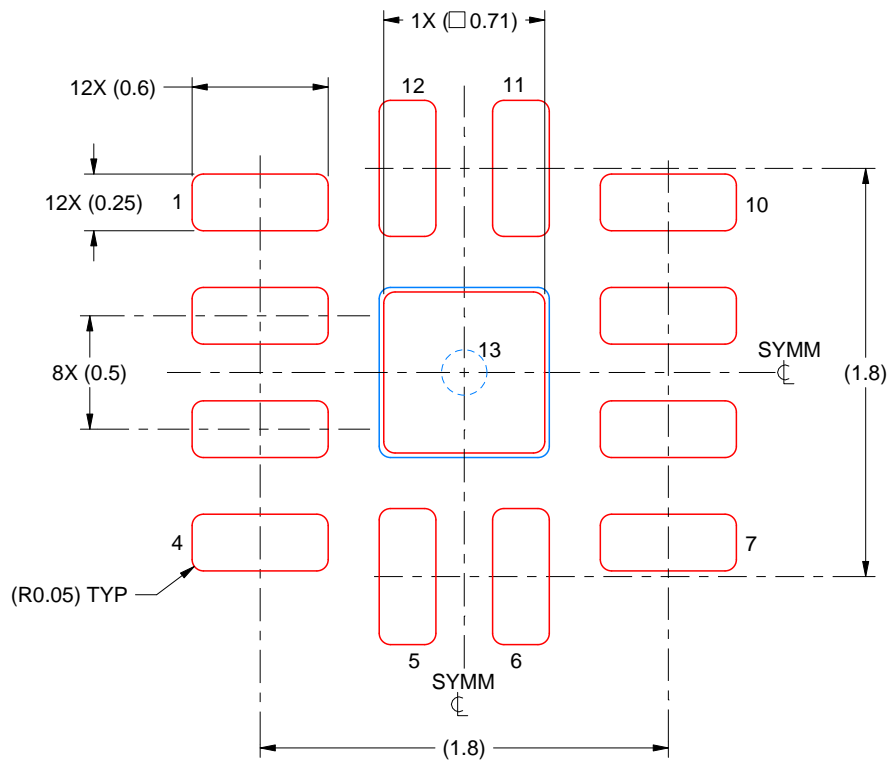

SOLDER PASTE EXAMPLE  
BASED ON 0.125 MM THICK STENCIL  
SCALE: 30X

EXPOSED PAD 13  
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4225258/B 04/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ(データシートを含みます)、設計リソース(リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](#) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所 : Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024, Texas Instruments Incorporated