

LMC7111 Tiny CMOS Operational Amplifier with Rail-to-Rail Input and Output

 Check for Samples: [LMC7111](#)

FEATURES

- **Tiny 5-Pin SOT-23 Package Saves Space**
- **Very Wide Common Mode Input Range**
- **Specified at 2.7V, 5V, and 10V**
- **Typical Supply Current 25 μ A at 5V**
- **50 kHz Gain-Bandwidth at 5V**
- **Similar to Popular LMC6462**
- **Output to Within 20 mV of Supply Rail at 100k Load**
- **Good Capacitive Load Drive**


APPLICATIONS

- **Mobile Communications**
- **Portable Computing**
- **Current Sensing for Battery Chargers**
- **Voltage Reference Buffering**
- **Sensor Interface**
- **Stable Bias for GaAs RF Amps**


DESCRIPTION

The LMC7111 is a micropower CMOS operational amplifier available in the space saving SOT-23 package. This makes the LMC7111 ideal for space and weight critical designs. The wide common-mode input range makes it easy to design battery monitoring circuits which sense signals above the V^+ supply. The main benefits of the Tiny package are most apparent in small portable electronic devices, such as mobile phones, pagers, and portable computers. The tiny amplifiers can be placed on a board where they are needed, simplifying board layout.

Connection Diagram

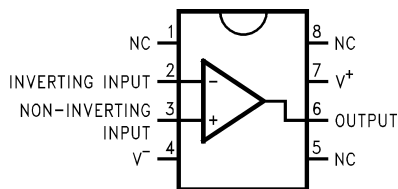

**Figure 1. 8-Pin PDIP
Top View**

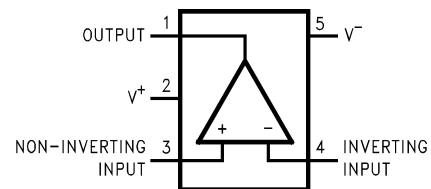

**Figure 2. 5-Pin SOT-23
Top View**



Figure 3. Actual Size



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings ⁽¹⁾⁽²⁾

| | | |
|---|----------------|--|
| ESD Tolerance ⁽³⁾ | SOT-23 Package | 2000V |
| | PDIP Package | 1500V |
| Differential Input Voltage | | ±Supply Voltage |
| Voltage at Input/Output Pin | | (V ⁺) + 0.3V, (V ⁻) - 0.3V |
| Supply Voltage (V ⁺ - V ⁻) | | 11V |
| Current at Input Pin | | ±5 mA |
| Current at Output Pin ⁽⁴⁾ | | ±30 mA |
| Current at Power Supply Pin | | 30 mA |
| Lead Temp. (Soldering, 10 sec.) | | 260°C |
| Storage Temperature Range | | -65°C to +150°C |
| Junction Temperature ⁽⁵⁾ | | 150°C |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (3) Human Body Model is 1.5 kΩ in series with 100 pF.
- (4) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature at 150°C.
- (5) The maximum power dissipation is a function of T_{J(MAX)}, θ_{JA} and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A)/θ_{JA}. All numbers apply for packages soldered directly into a PC board.

Operating Ratings ⁽¹⁾

| | | |
|---------------------------------------|----------------------|--------------------------------|
| Supply Voltage | | 2.5V ≤ V ⁺ ≤ 11V |
| Junction Temperature Range | LMC7111AI, LMC7111BI | -40°C ≤ T _J ≤ +85°C |
| Thermal Resistance (θ _{JA}) | 8-Pin PDIP | 115°C/W |
| | 5-Pin SOT-23 | 325°C/W |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not specified. For ensured specifications and the test conditions, see the Electrical Characteristics.

2.7V DC Electrical Characteristics

Unless otherwise specified, all limits specified for T_J = 25°C, V⁺ = 2.7V, V⁻ = 0V, V_{CM} = V_O = V⁺/2 and R_L > 1 MΩ. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|-------------------|---------------------------------------|---|--------------------|--------------------------------|--------------------------------|-----------|
| V _{OS} | Input Offset Voltage | V ⁺ = 2.7V | 0.9 | 3 | 7 | mV |
| | | | | 5 | 9 | max |
| TCV _{OS} | Input Offset Voltage Average Drift | | 2.0 | | | μV/°C |
| I _B | Input Bias Current | See ⁽³⁾ | 0.1 | 1 | 1 | pA |
| | | | | 20 | 20 | max |
| I _{OS} | Input Offset Current | See ⁽³⁾ | 0.01 | 0.5 | 0.5 | pA |
| | | | | 10 | 10 | max |
| R _{IN} | Input Resistance | | >10 | | | Tera Ω |
| +PSRR | Positive Power Supply Rejection Ratio | 2.7V ≤ V ⁺ ≤ 5.0V, V ⁻ = 0V, V _O = 2.5V | 60 | 55 50 | 55 50 | dB min |
| -PSRR | Negative Power Supply Rejection Ratio | -2.7V ≤ V ⁻ ≤ -5.0V, V ⁺ = 0V, V _O = 2.5V | 60 | 55 50 | 55 50 | dB min |

- (1) Typical Values represent the most likely parametric norm.
- (2) All limits are specified by testing or statistical analysis.
- (3) Bias Current specified by design and processing.

2.7V DC Electrical Characteristics (continued)

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|------------------|---------------------------------|---|--------------------|--------------------------------|--------------------------------|----------------------|
| V_{CM} | Input Common-Mode Voltage Range | $V^+ = 2.7\text{V}$ For CMRR $\geq 50\text{ dB}$ | -0.10 | 0.0 0.40 | 0.0 0.40 | V min |
| | | | 2.8 | 2.7 2.25 | 2.7 2.25 | V max |
| C_{IN} | Common-Mode Input Capacitance | | 3 | | | pF |
| V_O | Output Swing | $V^+ = 2.7\text{V}$ $R_L = 100\text{ k}\Omega$ | 2.69 | 2.68 2.4 | 2.68 2.4 | V min |
| | | | 0.01 | 0.02 0.08 | 0.02 0.08 | V max |
| | | $V^+ = 2.7\text{V}$ $R_L = 10\text{ k}\Omega$ | 2.65 | 2.6 2.4 | 2.6 2.4 | V min |
| | | | 0.03 | 0.1 0.3 | 0.1 0.3 | V max |
| I_{SC} | Output Short Circuit Current | Sourcing, $V_O = 0\text{V}$ | 7 | 1 0.7 | 1 0.7 | mA min |
| | | Sinking, $V_O = 2.7\text{V}$ | 7 | 1 0.7 | 1 0.7 | mA min |
| A_{VOL} | Voltage Gain | Sourcing | 400 | | | V/mv min |
| | | Sinking | 150 | | | V/mv min |
| I_S | Supply Current | $V^+ = +2.7\text{V}$, $V_O = V^+/2$ | 20 | 45 60 | 50 65 | μA max |

2.7V AC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 2.7\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|--------|------------------------|--------------------|--------------------|--------------------------------|--------------------------------|------------------|
| SR | Slew Rate | See ⁽³⁾ | 0.015 | | | V/ μs |
| GBW | Gain-Bandwidth Product | | 40 | | | kHz |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

(3) Connected as Voltage Follower with 1.0V step input. Number specified is the slower of the positive and negative slew rates. Input referred, $V^+ = 2.7\text{V}$ and $R_L = 100\text{ k}\Omega$ connected to 1.35V. Amp excited with 1 kHz to produce $V_O = 1\text{ V}_{\text{PP}}$.

3V DC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 3\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|-----------------|---------------------------------|---|--------------------|--------------------------------|--------------------------------|----------|
| V_{CM} | Input Common-Mode Voltage Range | $V^+ = 3\text{V}$ For CMRR $\geq 50\text{ dB}$ | -0.25 | 0.0 | 0.0 | V min |
| | | | 3.2 | 3.0 2.8 | 3.0 2.8 | V max |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

3.3V DC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 3.3\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|-----------------|---------------------------------|---|--------------------|-----------------------------------|-----------------------------------|----------|
| V_{CM} | Input Common-Mode Voltage Range | $V^+ = 3.3\text{V}$ For CMRR $\geq 50\text{ dB}$ | -0.25 | -0.1 0.00 | -0.1 0.00 | V min |
| | | | 3.5 | 3.4 3.2 | 3.4 3.2 | V max |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

5V DC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{ M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|--------------------------|---------------------------------------|--|--------------------|-----------------------------------|-----------------------------------|------------------------------|
| V_{OS} | Input Offset Voltage | $V^+ = 5\text{V}$ | 0.9 | | | mV max |
| TCV_{OS} | Input Offset Voltage Average Drift | | 2.0 | | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | See ⁽³⁾ | 0.1 | 1 20 | 1 20 | pA max |
| I_{OS} | Input Offset Current | See ⁽³⁾ | 0.01 | 0.5 10 | 0.5 10 | pA max |
| R_{IN} | Input Resistance | | >10 | | | Tera Ω |
| CMRR | Common Mode Rejection Ratio | $0\text{V} \leq V_{\text{CM}} \leq 5\text{V}$ | 85 | 70 | 60 | dB min |
| +PSRR | Positive Power Supply Rejection Ratio | $5\text{V} \leq V^+ \leq 10\text{V}$, $V^- = 0\text{V}$, $V_O = 2.5\text{V}$ | 85 | 70 | 60 | dB min |
| -PSRR | Negative Power Supply Rejection Ratio | $-5\text{V} \leq V^- \leq -10\text{V}$, $V^+ = 0\text{V}$, $V_O = -2.5\text{V}$ | 85 | 70 | 60 | dB min |
| V_{CM} | Input Common-Mode Voltage Range | $V^+ = 5\text{V}$ For CMRR $\geq 50\text{ dB}$ | -0.3 | -0.20 0.00 | -0.20 0.00 | V min |
| | | | 5.25 | 5.20 5.00 | 5.20 5.00 | V max |
| C_{IN} | Common-Mode Input Capacitance | | 3 | | | pF |
| V_O | Output Swing | $V^+ = 5\text{V}$ $R_L = 100\text{ k}\Omega$ | 4.99 | 4.98 | 4.98 | Vmin |
| | | | 0.01 | 0.02 | 0.02 | Vmax |
| | | $V^+ = 5\text{V}$ $R_L = 10\text{ k}\Omega$ | 4.98 | 4.9 | 4.9 | Vmin |
| | | | 0.02 | 0.1 | 0.1 | Vmin |
| I_{SC} | Output Short Circuit Current | Sourcing, $V_O = 0\text{V}$ | 7 | 5 3.5 | 5 3.5 | mA min |
| | | Sinking, $V_O = 3\text{V}$ | 7 | 5 3.5 | 5 3.5 | mA min |
| A_{VOL} | Voltage Gain | Sourcing | 500 | | | V/mv min |
| | | Sinking | 200 | | | V/mv min |
| I_S | Supply Current | $V^+ = +5\text{V}$, $V_O = V^+/2$ | 25 | | | μA max |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

(3) Bias Current specified by design and processing.

5V AC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|--------|------------------------|---|--------------------|--------------------------------|--------------------------------|------------------|
| SR | Slew Rate | Positive Going Slew Rate ⁽³⁾ | 0.027 | 0.015 | 0.010 | V/ μs |
| GBW | Gain-Bandwidth Product | | 50 | | | kHz |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

(3) Connected as Voltage Follower with 1.0V step input. Number specified is the slower of the positive slew rate. The negative slew rate is faster. Input referred, $V^+ = 5\text{V}$ and $R_L = 100\text{k}\Omega$ connected to 1.5V. Amp excited with 1 kHz to produce $V_O = 1\text{V}_{\text{PP}}$.

10V DC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_J = 25^\circ\text{C}$, $V^+ = 10\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|--------------------------|---|---|--------------------|--------------------------------|--------------------------------|------------------------------|
| V_{OS} | Input Offset Voltage | $V^+ = 10\text{V}$ | 0.9 | 3 5 | 7 9 | mV max |
| TCV_{OS} | Input Offset Voltage Average Drift | | 2.0 | | | $\mu\text{V}/^\circ\text{C}$ |
| I_{B} | Input Bias Current | | 0.1 | 1 20 | 1 20 | pA max |
| I_{OS} | Input Offset Current | | 0.01 | 0.5 10 | 0.5 10 | pA max |
| R_{IN} | Input Resistance | | >10 | | | Tera Ω |
| +PSRR | Positive Power Supply Rejection Ratio | $5\text{V} \leq V^+ \leq 10\text{V}$, $V^- = 0\text{V}$, $V_O = 2.5\text{V}$ | 80 | | | dB min |
| -PSRR | Negative Power Supply Rejection Ratio | $-5\text{V} \leq V^- \leq -10\text{V}$, $V^+ = 0\text{V}$, $V_O = 2.5\text{V}$ | 80 | | | dB min |
| V_{CM} | Input Common-Mode Voltage Range | $V^+ = 10\text{V}$ For $\text{CMRR} \geq 50\text{ dB}$ | -0.2 | -0.15 0.00 | -0.15 0.00 | V min |
| | | | 10.2 | 10.15 10.00 | 10.15 10.00 | V max |
| C_{IN} | Common-Mode Input Capacitance | | 3 | | | pF |
| I_{SC} | Output Short Circuit Current ⁽³⁾ | Sourcing, $V_O = 0\text{V}$ | 30 | 20 7 | 20 7 | mA min |
| | | Sinking, $V_O = 10\text{V}$ | 30 | 20 7 | 20 7 | mA min |
| A_{VOL} | Voltage Gain 100 k Ω Load | Sourcing | 500 | | | V/mv min |
| | | Sinking | 200 | | | V/mv min |
| I_{S} | Supply Current | $V^+ = +10\text{V}$, $V_O = V^+/2$ | 25 | 50 65 | 60 75 | μA max |
| V_O | Output Swing | $V^+ = 10\text{V}$ $R_L = 100\text{k}\Omega$ | 9.99 | 9.98 | 9.98 | Vmin |
| | | | 0.01 | 0.02 | 0.02 | Vmax |
| | | $V^+ = 10\text{V}$ $R_L = 10\text{k}\Omega$ | 9.98 | 9.9 | 9.9 | Vmin |
| | | | 0.02 | 0.1 | 0.1 | Vmin |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

(3) Bias Current specified by design and processing.

10V AC Electrical Characteristics

Unless otherwise specified, all limits specified for $T_j = 25^\circ\text{C}$, $V^+ = 10\text{V}$, $V^- = 0\text{V}$, $V_{\text{CM}} = V_O = V^+/2$ and $R_L > 1\text{M}\Omega$. **Boldface** limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Typ ⁽¹⁾ | LMC7111AI Limit ⁽²⁾ | LMC7111BI Limit ⁽²⁾ | Units |
|----------|---------------------------------|--|--------------------|-----------------------------------|-----------------------------------|------------------------|
| SR | Slew Rate | See ⁽³⁾ | 0.03 | | | V/ μs |
| GBW | Gain-Bandwidth Product | | 50 | | | kHz |
| ϕ_m | Phase Margin | | 50 | | | deg |
| G_m | Gain Margin | | 15 | | | dB |
| | Input-Referred Voltage Noise | $f = 1\text{ kHz}$ $V_{\text{CM}} = 1\text{ V}$ | 110 | | | nV/ $\sqrt{\text{Hz}}$ |
| | Input-Referred Current Noise | $f = 1\text{ kHz}$ | 0.03 | | | pA/ $\sqrt{\text{Hz}}$ |

(1) Typical Values represent the most likely parametric norm.

(2) All limits are specified by testing or statistical analysis.

(3) Connected as Voltage Follower with 1.0V step input. Number specified is the slower of the positive and negative slew rates. Input referred, $V^+ = 10\text{V}$ and $R_L = 100\text{ k}\Omega$ connected to 5V. Amp excited with 1 kHz to produce $V_O = 2 V_{\text{PP}}$.

Typical Performance Characteristics

$T_A = 25^\circ\text{C}$ unless specified, Single Supply

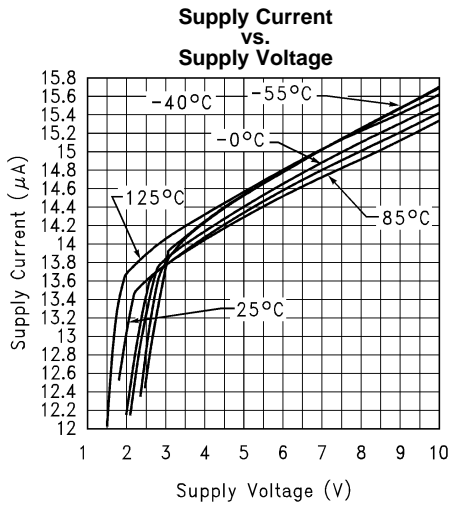


Figure 4.

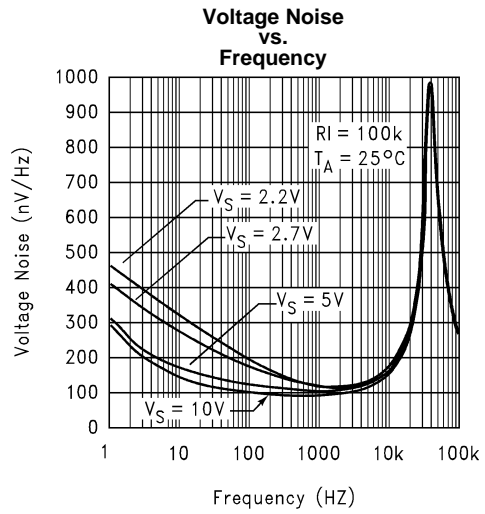


Figure 5.

2.7V Performance

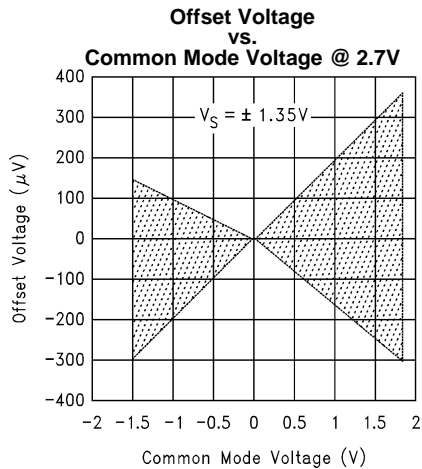


Figure 6.

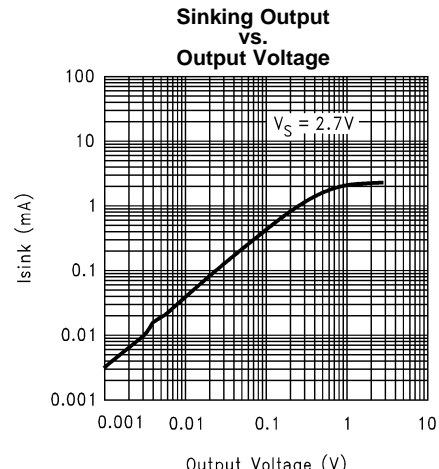


Figure 7.

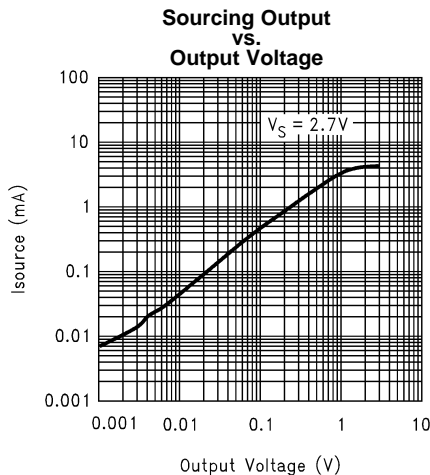


Figure 8.

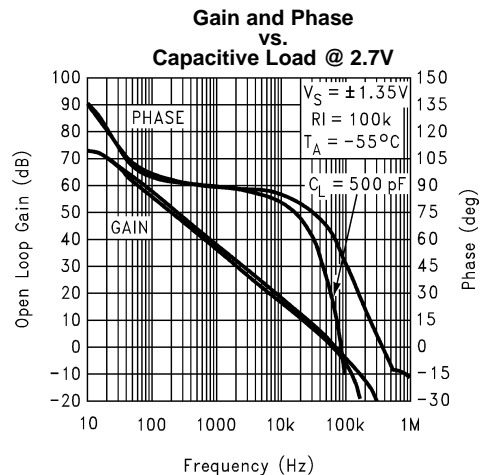


Figure 9.

2.7V Performance (continued)

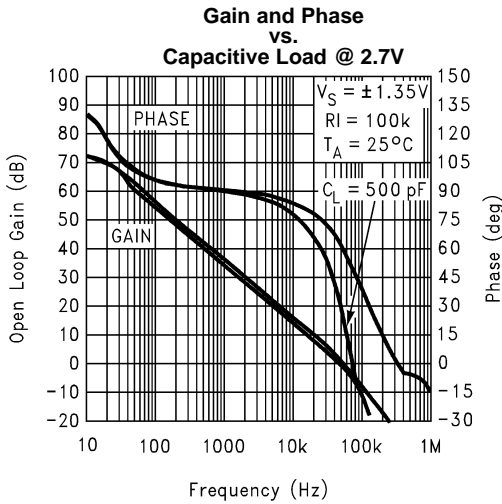


Figure 10.

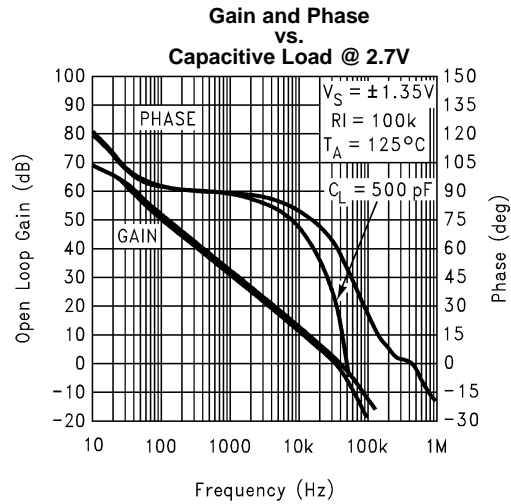


Figure 11.

3V Performance

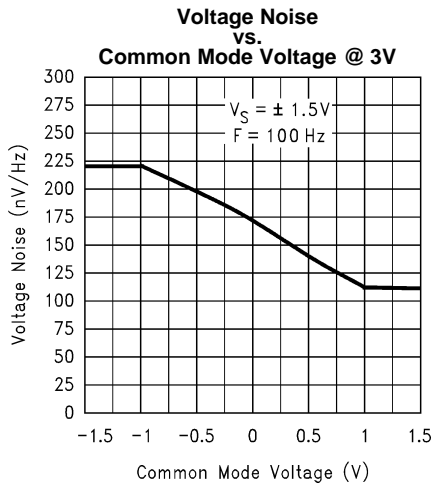


Figure 12.

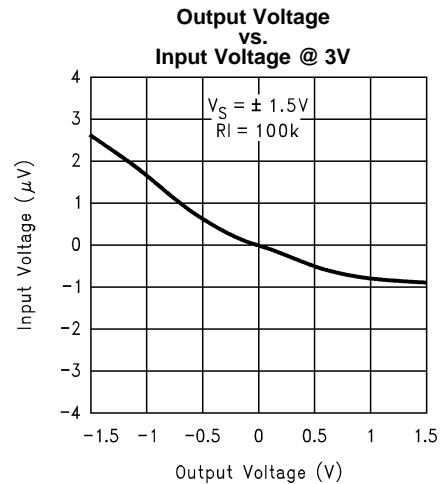


Figure 13.

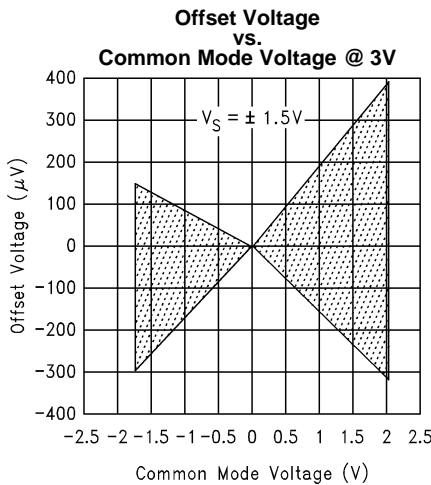


Figure 14.

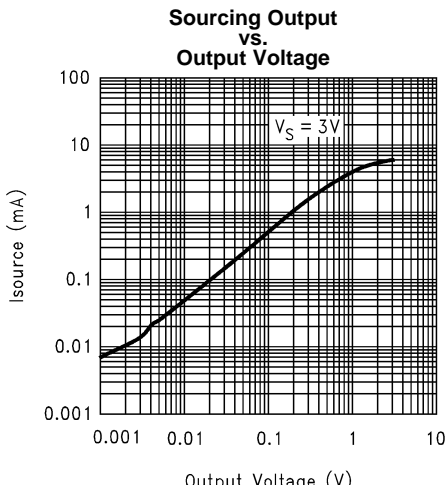


Figure 15.

3V Performance (continued)

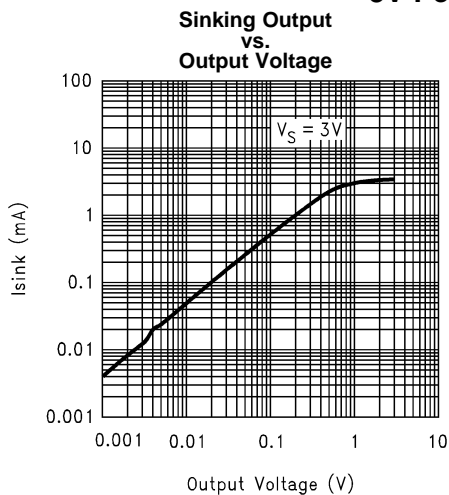


Figure 16.

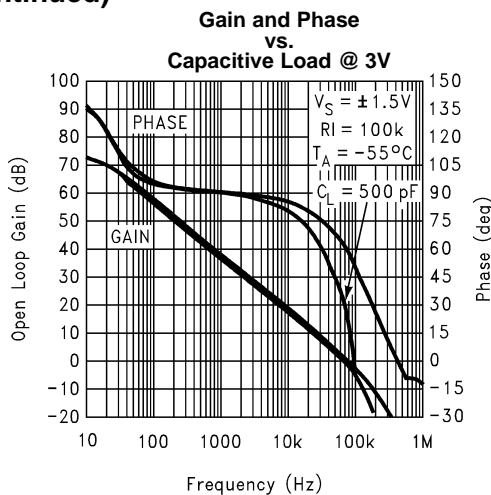


Figure 17.

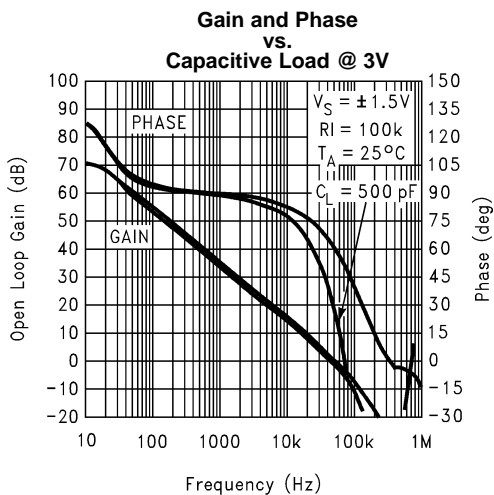


Figure 18.

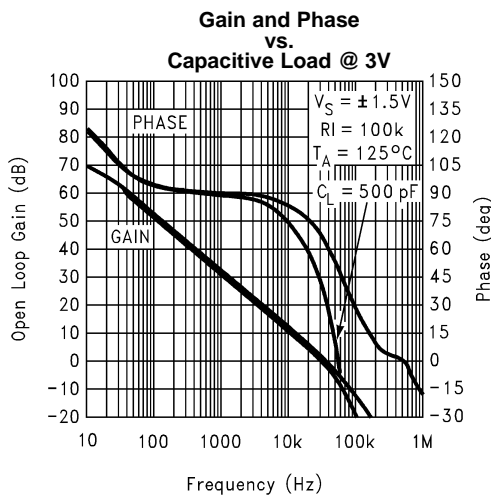


Figure 19.

5V Performance

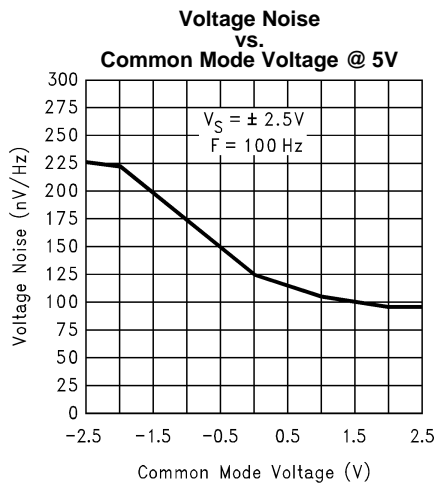


Figure 20.

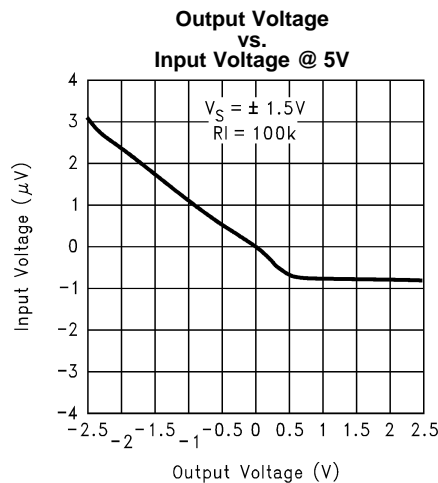


Figure 21.

5V Performance (continued)

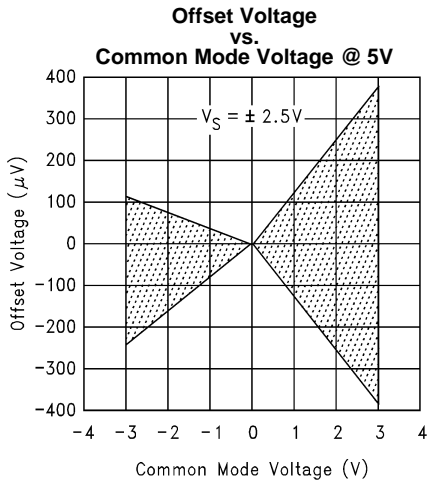


Figure 22.

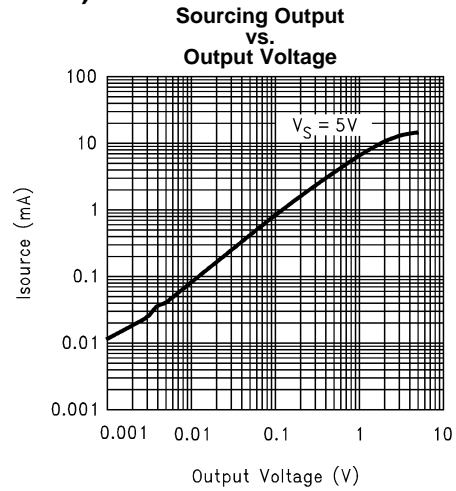


Figure 23.

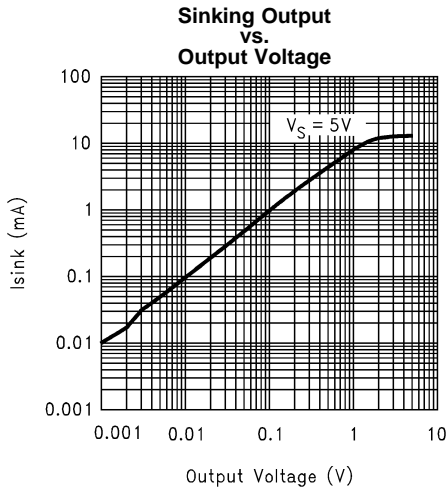


Figure 24.

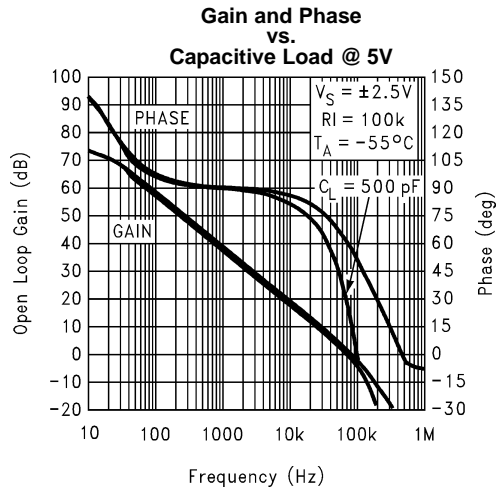


Figure 25.

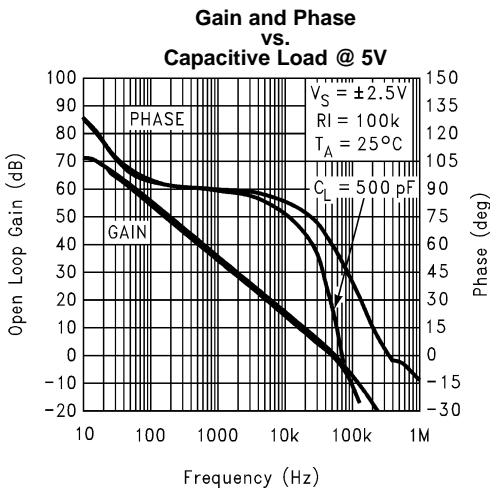


Figure 26.

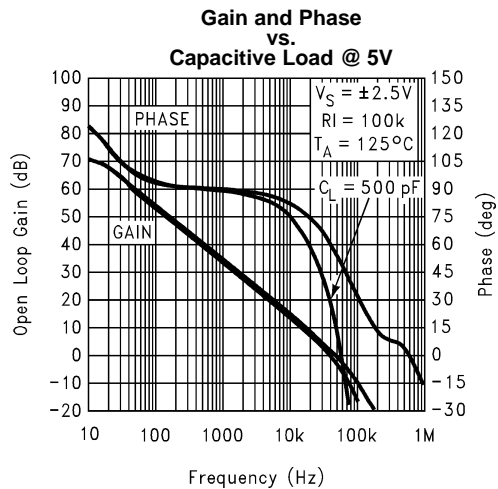


Figure 27.

5V Performance (continued)

Non-Inverting
Small Signal Pulse Response
at 5V

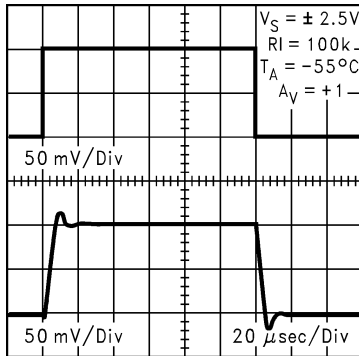


Figure 28.

Non-Inverting
Small Signal Pulse Response
at 5V

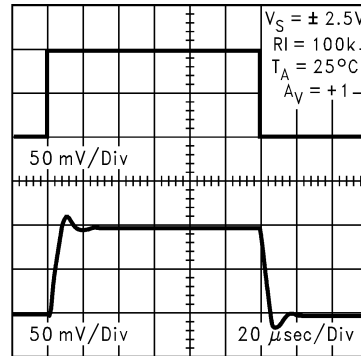


Figure 29.

Non-Inverting
Small Signal Pulse Response
at 5V

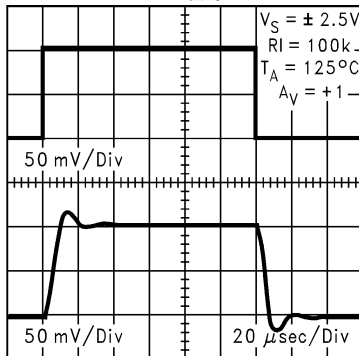


Figure 30.

Non-Inverting
Large Signal Pulse Response
at 5V

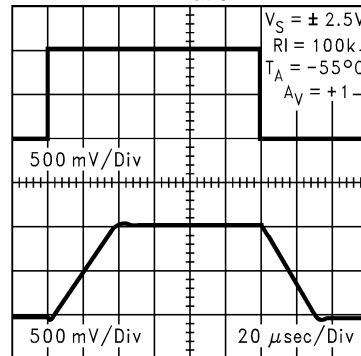


Figure 31.

Non-Inverting
Large Signal Pulse Response
at 5V

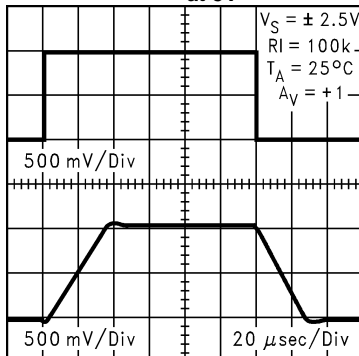


Figure 32.

Non-Inverting
Large Signal Pulse Response
at 5V

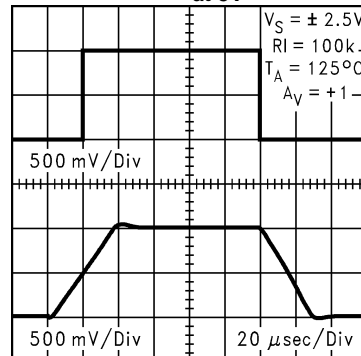


Figure 33.

5V Performance (continued)

Inverting Small Signal Pulse Response at 5V

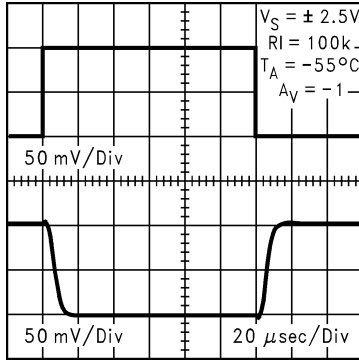


Figure 34.

Inverting Small Signal Pulse Response at 5V

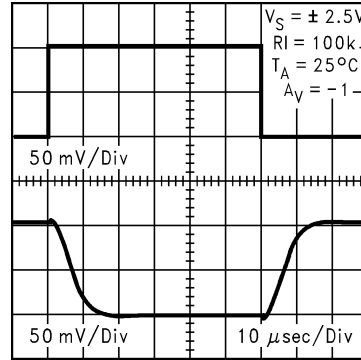


Figure 35.

Inverting Small Signal Pulse Response at 5V

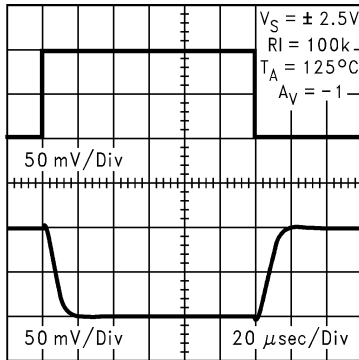


Figure 36.

Inverting Large Signal Pulse Response at 5V

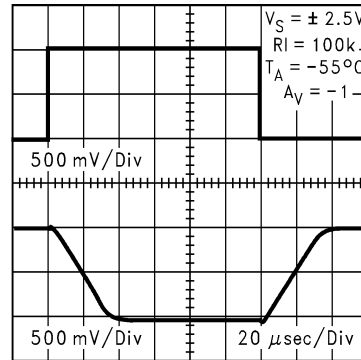


Figure 37.

Inverting Large Signal Pulse Response at 5V

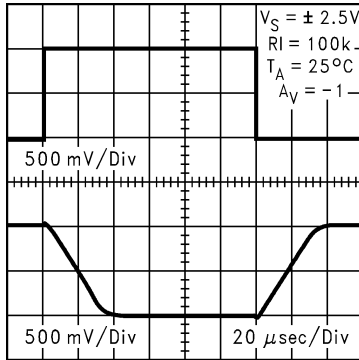


Figure 38.

Inverting Large Signal Pulse Response at 5V

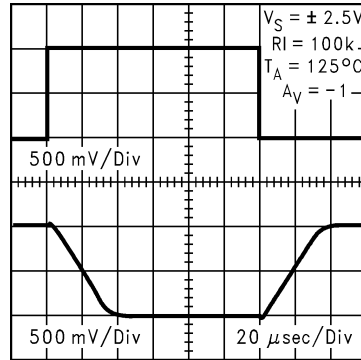


Figure 39.

10V Performance

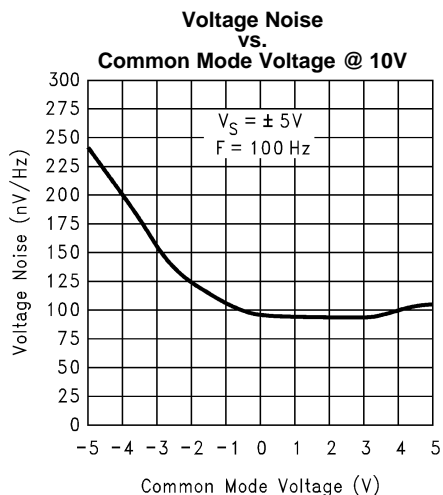


Figure 40.

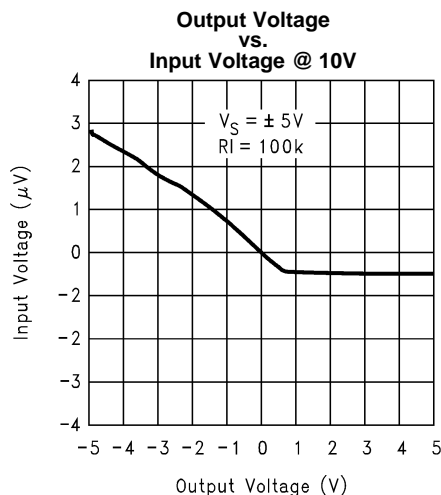


Figure 41.

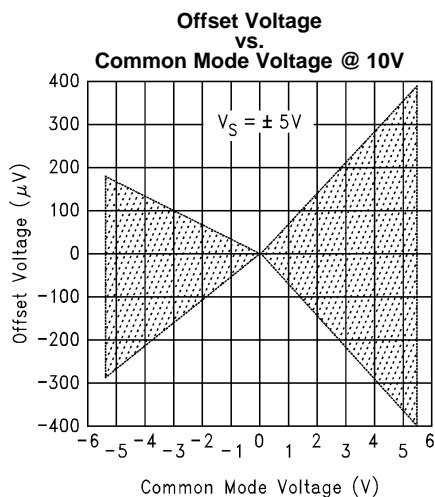


Figure 42.

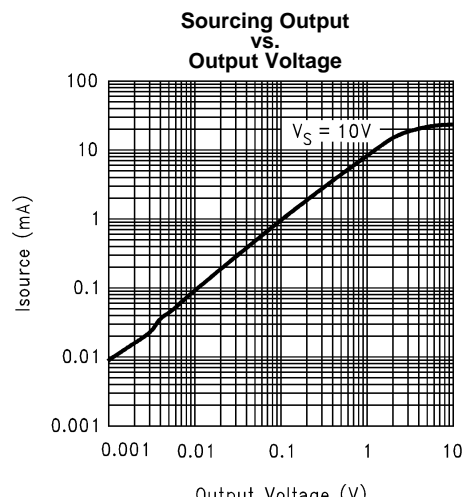


Figure 43.

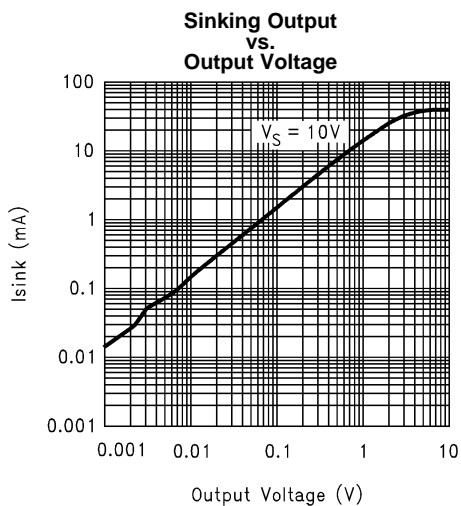


Figure 44.

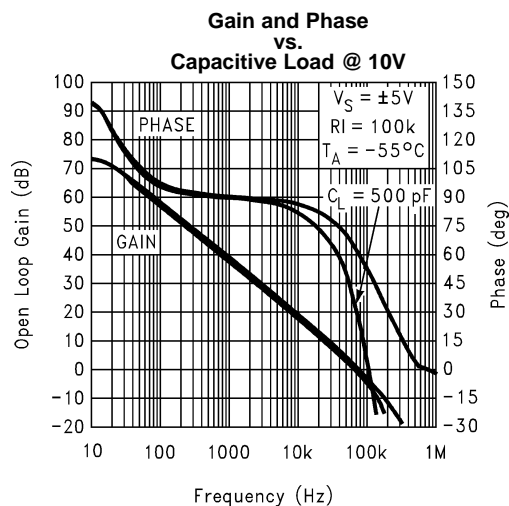


Figure 45.

10V Performance (continued)

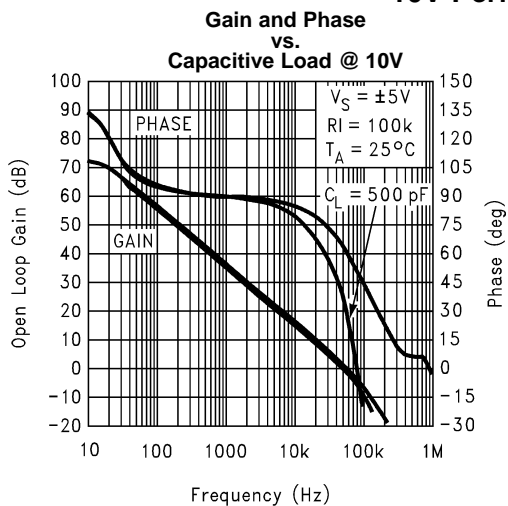


Figure 46.

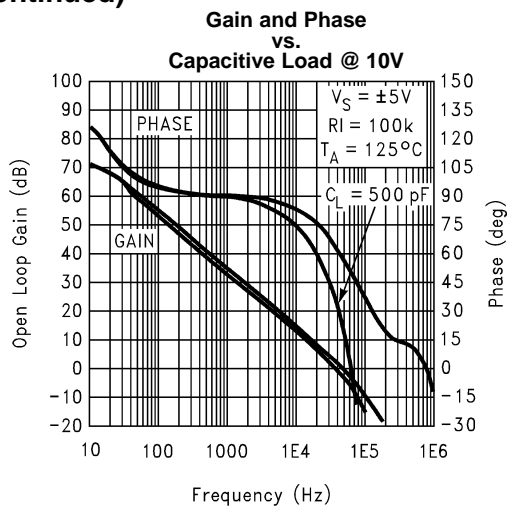


Figure 47.

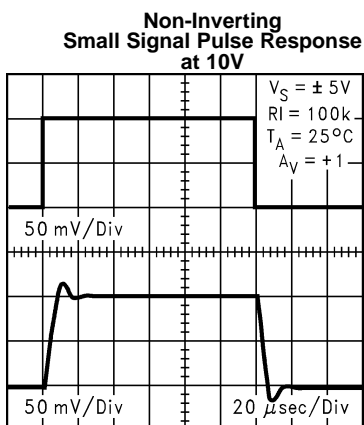


Figure 48.

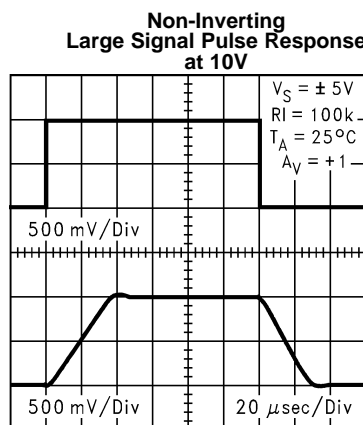


Figure 49.

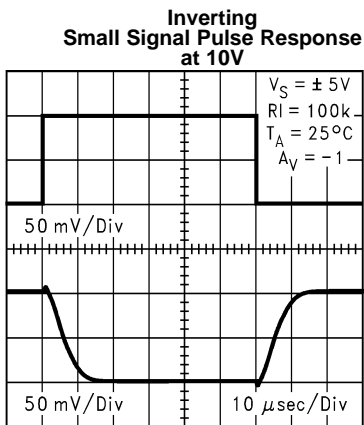


Figure 50.

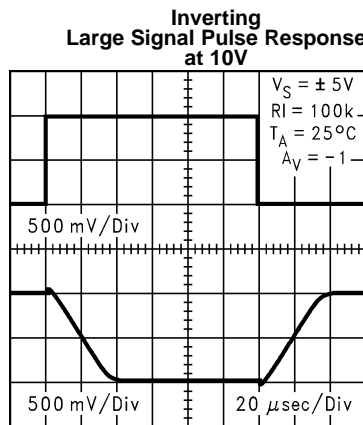


Figure 51.

APPLICATION INFORMATION

BENEFITS OF THE LMC7111 TINY AMP

Size

The small footprint of the SOT-23 packaged Tiny amp, (0.120 x 0.118 inches, 3.05 x 3.00 mm) saves space on printed circuit boards, and enable the design of smaller electronic products. Because they are easier to carry, many customers prefer smaller and lighter products.

Height

The height (0.056 inches, 1.43 mm) of the Tiny amp makes it possible to use it in PCMCIA type III cards.

Signal Integrity

Signals can pick up noise between the signal source and the amplifier. By using a physically smaller amplifier package, the Tiny amp can be placed closer to the signal source, reducing noise pickup and increasing signal integrity. The Tiny amp can also be placed next to the signal destination, such as a buffer for the reference of an analog to digital converter.

Simplified Board Layout

The Tiny amp can simplify board layout in several ways. First, by placing an amp where amps are needed, instead of routing signals to a dual or quad device, long pc traces may be avoided.

By using multiple Tiny amps instead of duals or quads, complex signal routing and possibly crosstalk can be reduced.

DIPs available for prototyping

LMC7111 amplifiers packaged in conventional 8-pin dip packages can be used for prototyping and evaluation without the need to use surface mounting in early project stages.

Low Supply Current

The typical 25 μ A supply current of the LMC7111 extends battery life in portable applications, and may allow the reduction of the size of batteries in some applications.

Wide Voltage Range

The LMC7111 is characterized at 2.7V, 3V, 3.3V, 5V and 10V. Performance data is provided at these popular voltages. This wide voltage range makes the LMC7111 a good choice for devices where the voltage may vary over the life of the batteries.

INPUT COMMON MODE VOLTAGE RANGE

The LMC7111 does not exhibit phase inversion when an input voltage exceeds the negative supply voltage.

The absolute maximum input voltage is 300 mV beyond either rail at room temperature. Voltages greatly exceeding this maximum rating can cause excessive current to flow in or out of the input pins, adversely affecting reliability.

Applications that exceed this rating must externally limit the maximum input current to ± 5 mA with an input resistor as shown in [Figure 52](#).

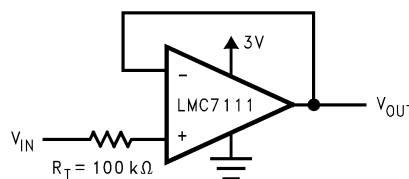


Figure 52. R_I Input Current Protection for Voltages Exceeding the Supply Voltage

CAPACITIVE LOAD TOLERANCE

The LMC7111 can typically directly drive a 300 pF load with $V_S = 10V$ at unity gain without oscillating. The unity gain follower is the most sensitive configuration. Direct capacitive loading reduces the phase margin of op-amps. The combination of the op-amp's output impedance and the capacitive load induces phase lag. This results in either an underdamped pulse response or oscillation.

Capacitive load compensation can be accomplished using resistive isolation as shown in [Figure 53](#). This simple technique is useful for isolating the capacitive input of multiplexers and A/D converters.

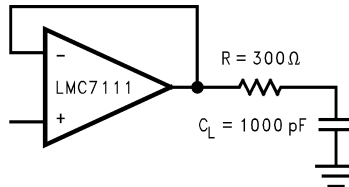


Figure 53. Resistive Isolation of a 300 pF Capacitive Load

COMPENSATING FOR INPUT CAPACITANCE WHEN USING LARGE VALUE FEEDBACK RESISTORS

When using very large value feedback resistors, (usually $> 500 \text{ k}\Omega$) the large feedback resistance can react with the input capacitance due to transducers, photodiodes, and circuit board parasitics to reduce phase margins.

The effect of input capacitance can be compensated for by adding a feedback capacitor. The feedback capacitor (as in [Figure 54](#)), C_f is first estimated by:

$$\frac{1}{2\pi R_1 C_{IN}} \geq \frac{1}{2\pi R_2 C_f} \quad (1)$$

or

$$R_1 C_{IN} \leq R_2 C_f \quad (2)$$

which typically provides significant overcompensation.

Printed circuit board stray capacitance may be larger or smaller than that of a breadboard, so the actual optimum value for C_f may be different. The values of C_f should be checked on the actual circuit. (Refer to the LMC660 quad CMOS amplifier data sheet for a more detailed discussion.)

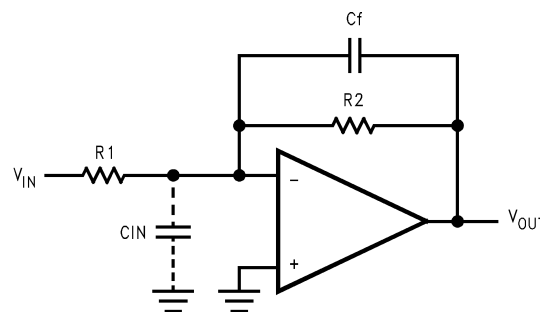


Figure 54. Cancelling the Effect of Input Capacitance


OUTPUT SWING

The output of the LMC7111 will go to within 100 mV of either power supply rail for a 10 kΩ load and to 20 mV of the rail for a 100 kΩ load. This makes the LMC7111 useful for driving transistors which are connected to the same power supply. By going very close to the supply, the LMC7111 can turn the transistors all the way on or all the way off.

BIASING GaAs RF AMPLIFIERS

The capacitive load capability, low current draw, and small size of the SOT-23 LMC7111 make it a good choice for providing a stable negative bias to other integrated circuits.

The very small size of the LMC7111 and the LM4040 reference take up very little board space.

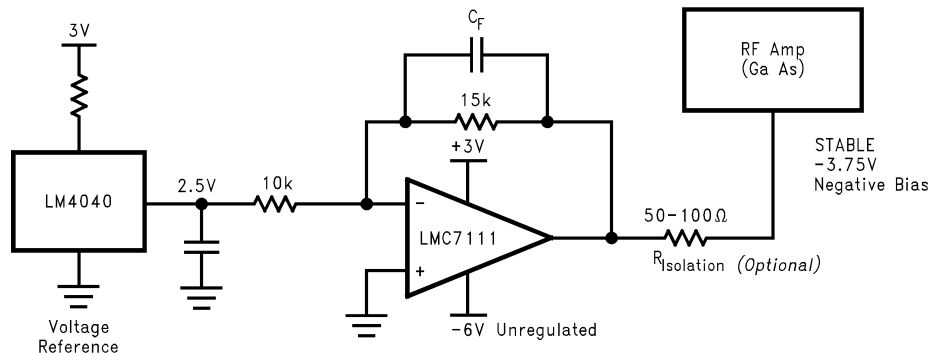

C_F and $R_{Isolation}$ prevent oscillations when driving capacitive loads.


Figure 55. Stable Negative Bias

REFERENCE BUFFER FOR A-TO-D CONVERTERS

The LMC7111 can be used as a voltage reference buffer for analog-to-digital converters. This works best for A-to-D converters whose reference input is a static load, such as dual slope integrating A-to-Ds. Converters whose reference input is a dynamic load (the reference current changes with time) may need a faster device, such as the LMC7101 or the LMC7131.

The small size of the LMC7111 allows it to be placed close to the reference input. The low supply current (25 μ A typical) saves power.

For A-to-D reference inputs which require higher accuracy and lower offset voltage, please see the LMC6462 datasheet. The LMC6462 has performance similar to the LMC7111. The LMC6462 is available in two grades with reduced input voltage offset.

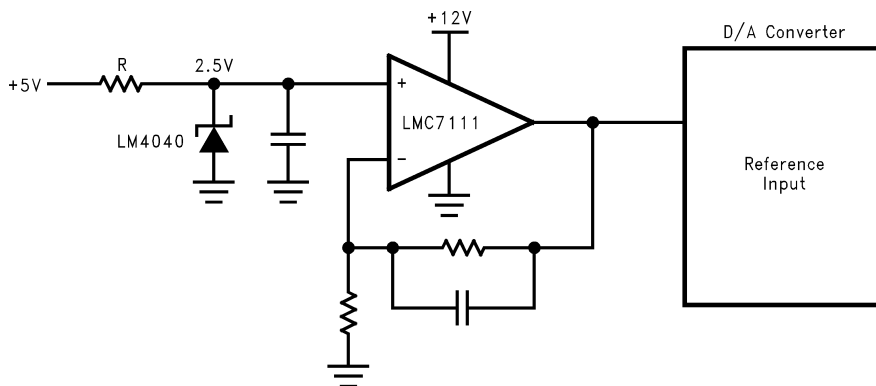

DUAL AND QUAD DEVICES WITH SIMILAR PERFORMANCE

The LMC6462 and LMC6464 are dual and quad devices with performance similar to the LMC7111. They are available in both conventional through-hole and surface mount packaging. Please see the LMC6462/4 datasheet for details.

SPICE MACROMODEL

A SPICE macromodel is available for the LMC7111. This model includes simulation of:

- Input common-mode voltage range
- Frequency and transient response

- Quiescent and dynamic supply current
- Output swing dependence on loading conditions and many more characteristics as listed on the macro model disk. Visit the LMC7111 product page on <http://www.ti.com> for the spice model.

ADDITIONAL SOT-23 TINY DEVICES

Additional parts are available in the space saving SOT-23 Tiny package, including amplifiers, voltage references, and voltage regulators. These devices include—

LMC7101 1 MHz gain-bandwidth rail-to-rail input and output amplifier—high input impedance and high gain, 700 μ A typical current 2.7V, 3V, 5V and 15V specifications.

LM7131 Tiny Video amp with 70 MHz gain bandwidth. Specified at 3V, 5V and \pm 5V supplies.

LMC7211 Comparator in a tiny package with rail-to-rail input and push-pull output. Typical supply current of 7 μ A. Typical propagation delay of 7 μ s. Specified at 2.7V, 5V and 15V supplies.

LMC7221 Comparator with an open drain output for use in mixed voltage systems. Similar to the LMC7211, except the output can be used with a pull-up resistor to a voltage different than the supply voltage.

LP2980 Micropower SOT 50 mA Ultra Low-Dropout Regulator.

LM4040 Precision micropower shunt voltage reference. Fixed voltages of 2.5000V, 4.096V, 5.000V, 8.192V and 10.000V.

LM4041 Precision micropower shunt voltage reference 1.225V and adjustable.

Visit <http://www.ti.com> for more information.

REVISION HISTORY

| Changes from Revision D (March 2013) to Revision E | Page |
|--|--------------------------|
| <hr/> <ul style="list-style-type: none">• Changed layout of National Data Sheet to TI format | <hr/> 18 |

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|-------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|---------|
| LMC7111BIM5/NOPB | LIFEBUY | SOT-23 | DBV | 5 | 1000 | RoHS & Green | SN | Level-1-260C-UNLIM | -40 to 85 | A01B | |
| LMC7111BIM5X/NOPB | ACTIVE | SOT-23 | DBV | 5 | 3000 | RoHS & Green | SN | Level-1-260C-UNLIM | -40 to 85 | A01B | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMC7111BIM5/NOPB | SOT-23 | DBV | 5 | 1000 | 178.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| LMC7111BIM5X/NOPB | SOT-23 | DBV | 5 | 3000 | 178.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMC7111BIM5/NOPB | SOT-23 | DBV | 5 | 1000 | 208.0 | 191.0 | 35.0 |
| LMC7111BIM5X/NOPB | SOT-23 | DBV | 5 | 3000 | 208.0 | 191.0 | 35.0 |

DBV0005A



PACKAGE OUTLINE

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.


4214839/J 02/2024

EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

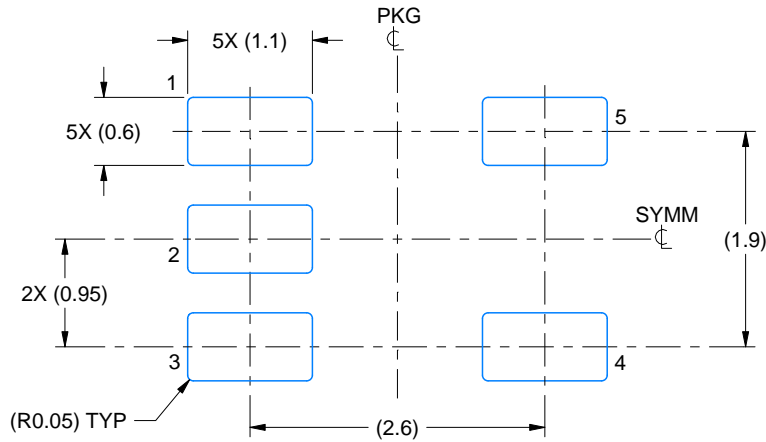

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

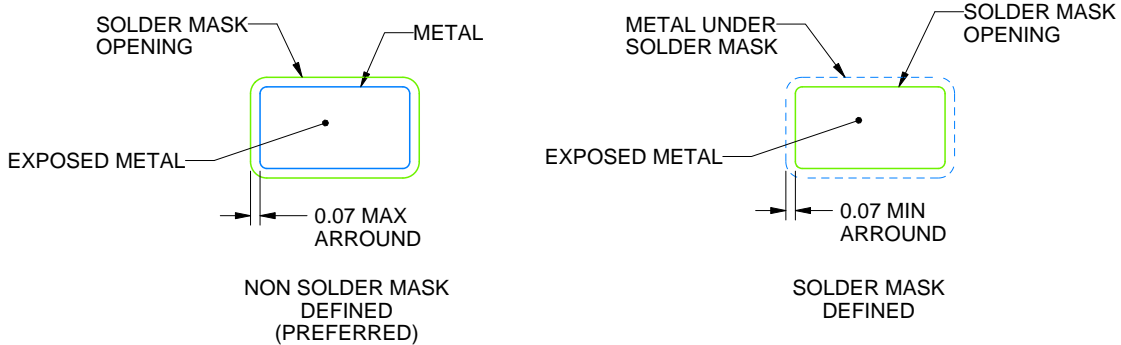

SOLDER MASK DETAILS

4214839/J 02/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/J 02/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated