


2 Efficiency

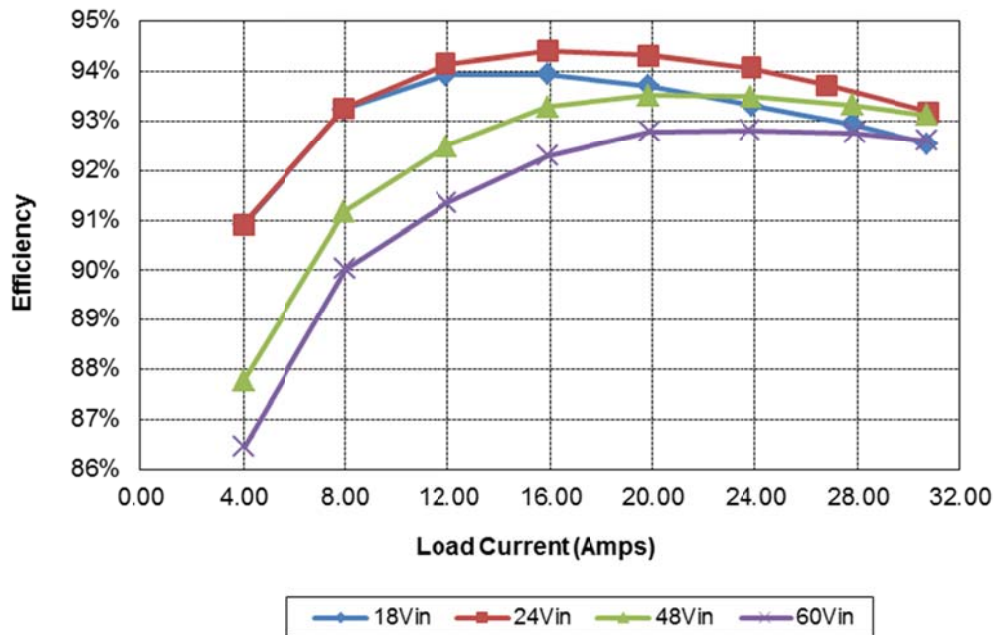

18Vin		Shunt Resistance:		0.001999				
Vshunt mV	Iout	Vout	Vin	Iin	Pin	Pout	Losses	Efficiency
0.00	0.0000	5.970	18.008	0.1046	1.884	0.00	1.88	
8.01	4.0073	5.969	18.014	1.4604	26.308	23.92	2.39	90.9%
15.87	7.9395	5.968	18.021	2.820	50.819	47.38	3.44	93.2%
23.83	11.9217	5.969	18.029	4.202	75.758	71.16	4.60	93.9%
31.79	15.9039	5.968	18.029	5.604	101.035	94.91	6.12	93.9%
39.68	19.8512	5.968	18.037	7.009	126.421	118.47	7.95	93.7%
47.74	23.8834	5.969	18.041	8.468	152.771	142.56	10.21	93.3%
55.53	27.7806	5.968	18.041	9.888	178.389	165.79	12.59	92.9%
61.45	30.7423	5.969	18.000	11.017	198.306	183.50	14.81	92.5%

24Vin								
Vshunt mV	Iout	Vout	Vin	Iin	Pin	Pout	Losses	Efficiency
0.00	0.0000	5.975	23.96	0.0833	1.996	0.00	2.00	
7.97	3.9872	5.972	24.04	1.0894	26.189	23.81	2.38	90.9%
15.88	7.9445	5.970	24.01	2.118	50.853	47.43	3.42	93.3%
23.81	11.9117	5.969	24.02	3.144	75.519	71.10	4.42	94.1%
31.74	15.8789	5.968	24.03	4.177	100.373	94.77	5.61	94.4%
39.67	19.8462	5.968	24.07	5.217	125.573	118.44	7.13	94.3%
47.63	23.8284	5.968	24.03	6.291	151.173	142.21	8.96	94.1%
53.57	26.8001	5.969	24.04	7.100	170.684	159.97	10.71	93.7%
61.58	30.8073	5.969	23.96	8.236	197.335	183.89	13.45	93.2%


48Vin								
Vshunt mV	Iout	Vout	Vin	Iin	Pin	Pout	Losses	Efficiency
0.00	0.0000	5.972	48.01	0.0654	3.140	0.00	3.14	
7.95	3.9772	5.971	48.02	0.5635	27.059	23.75	3.31	87.8%
15.88	7.9445	5.970	47.99	1.0840	52.021	47.43	4.59	91.2%
23.87	11.9417	5.970	47.99	1.6062	77.082	71.29	5.79	92.5%
31.73	15.8739	5.969	48.00	2.116	101.568	94.75	6.82	93.3%
39.67	19.8462	5.970	48.01	2.639	126.698	118.48	8.22	93.5%
47.65	23.8384	5.970	47.99	3.172	152.224	142.32	9.91	93.5%
55.54	27.7856	5.970	48.00	3.703	177.744	165.88	11.86	93.3%
61.50	30.7673	5.970	48.05	4.105	197.245	183.68	13.56	93.1%

60Vin								
Vshunt mV	Iout	Vout	Vin	Iin	Pin	Pout	Losses	Efficiency
0.00	0.0000	5.975	60.01	0.0596	3.577	0.00	3.58	
7.99	3.9972	5.972	60.02	0.4601	27.615	23.87	3.74	86.4%
16.00	8.0045	5.971	60.00	0.8848	53.088	47.79	5.29	90.0%
23.83	11.9217	5.970	60.00	1.2986	77.916	71.17	6.74	91.3%
31.73	15.8739	5.971	60.00	1.7117	102.702	94.78	7.92	92.3%
39.73	19.8762	5.969	60.00	2.131	127.860	118.64	9.22	92.8%
47.61	23.8184	5.970	60.01	2.553	153.206	142.20	11.01	92.8%
55.72	27.8757	5.970	60.00	2.990	179.400	166.42	12.98	92.8%
61.49	30.7623	5.970	60.02	3.304	198.306	183.65	14.66	92.6%


3 Thermal

The thermal images below show the circuit board with a 31A load. The ambient temperature was 25C with approximately 250LFM of air flow.

3.1 24V Input

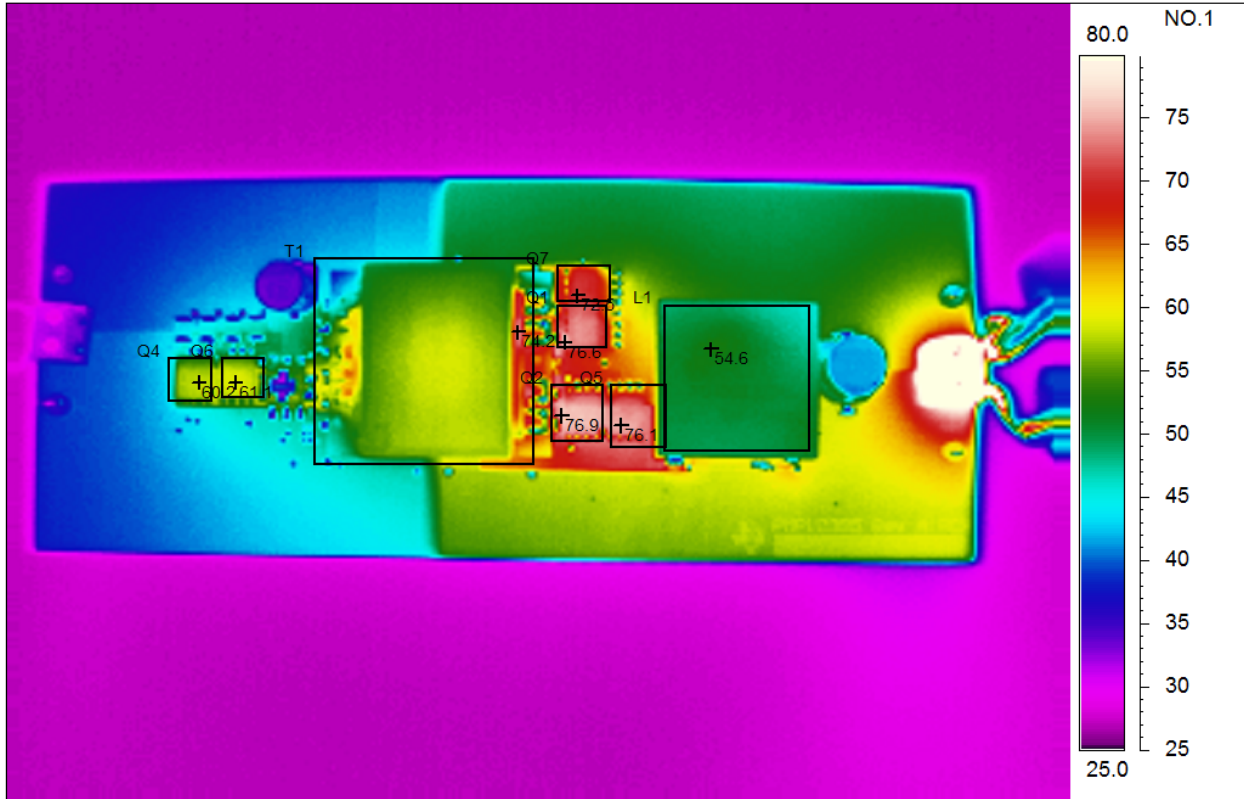


Area analysis	Value
Q4Max	60.2°C
Q6Max	61.1°C
T1Max	74.2°C
Q7Max	72.5°C
Q1Max	76.6°C
Q2Max	76.9°C
Q5Max	76.1°C
L1 Max	54.6°C

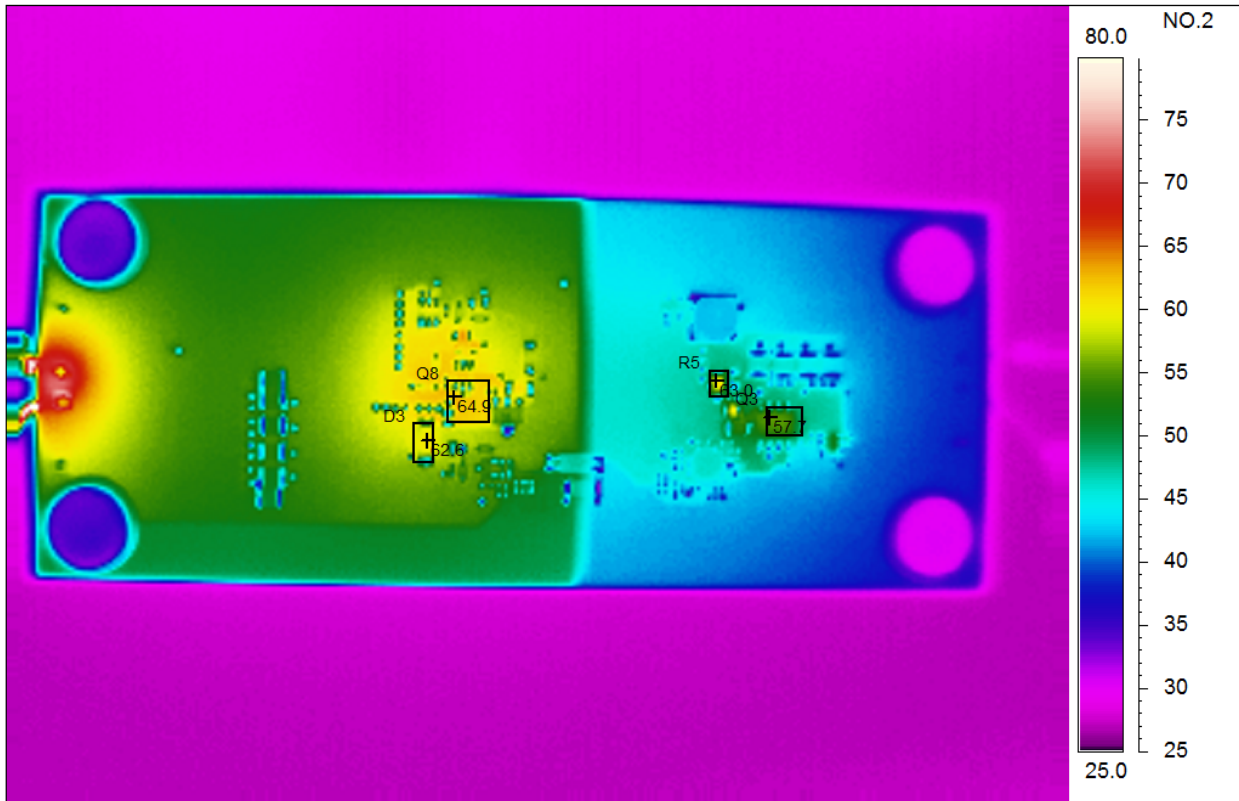


Area analysis	Value
D3Max	62.6°C
Q8Max	64.9°C
Q3Max	57.7°C
R5 Max	63.0°C

3.2 48V Input

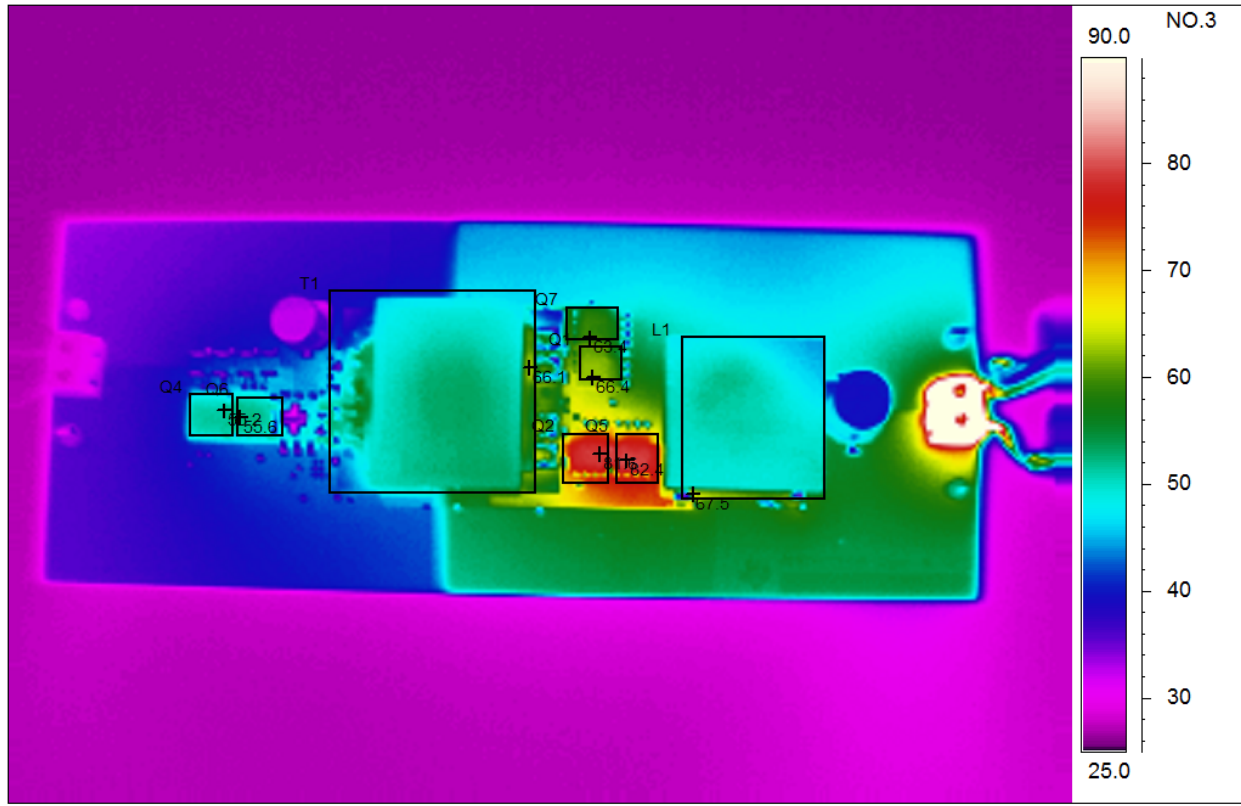


Area analysis	Value
Q4 Max	55.2°C
Q6Max	55.6°C
T1Max	66.1°C
Q7Max	63.4°C
Q1Max	66.4°C
Q2Max	81.6°C
Q5Max	82.4°C
L1 Max	67.5°C

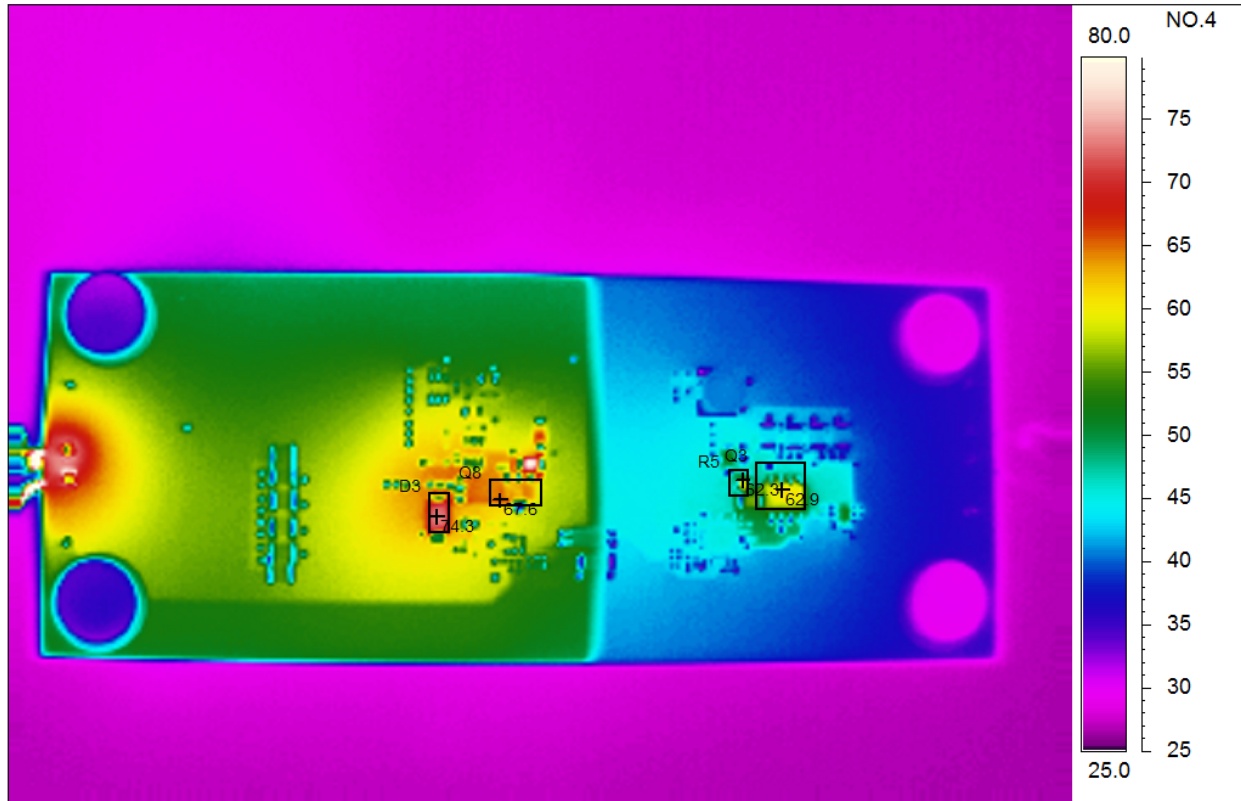


Area analysis	Value
D3 Max	74.3°C
Q8Max	67.6°C
Q3Max	62.9°C
R5 Max	62.3°C

4 Startup


4.1 18V Input, No Load

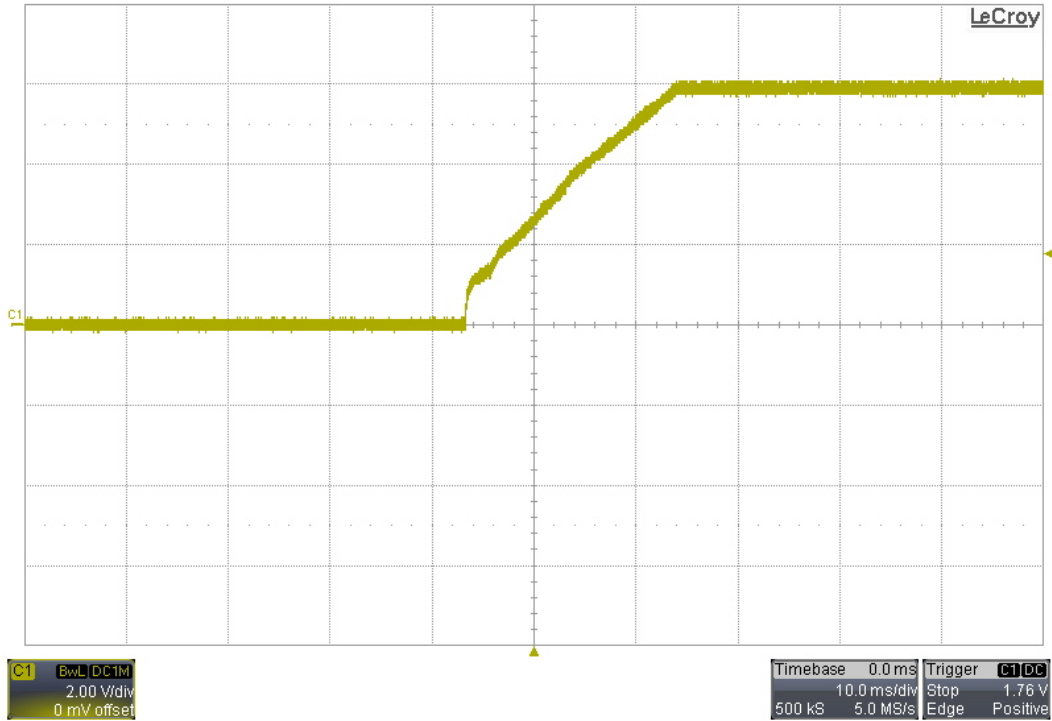


4.2 60V Input, No Load

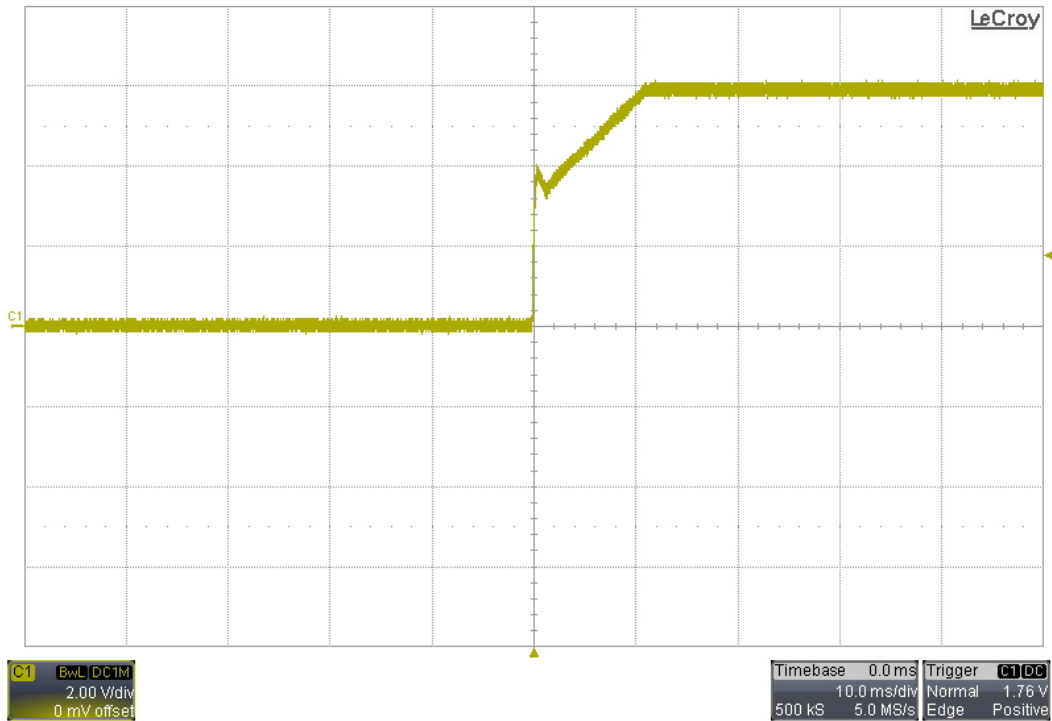

4.3 18V Input, 0.5Ω Load

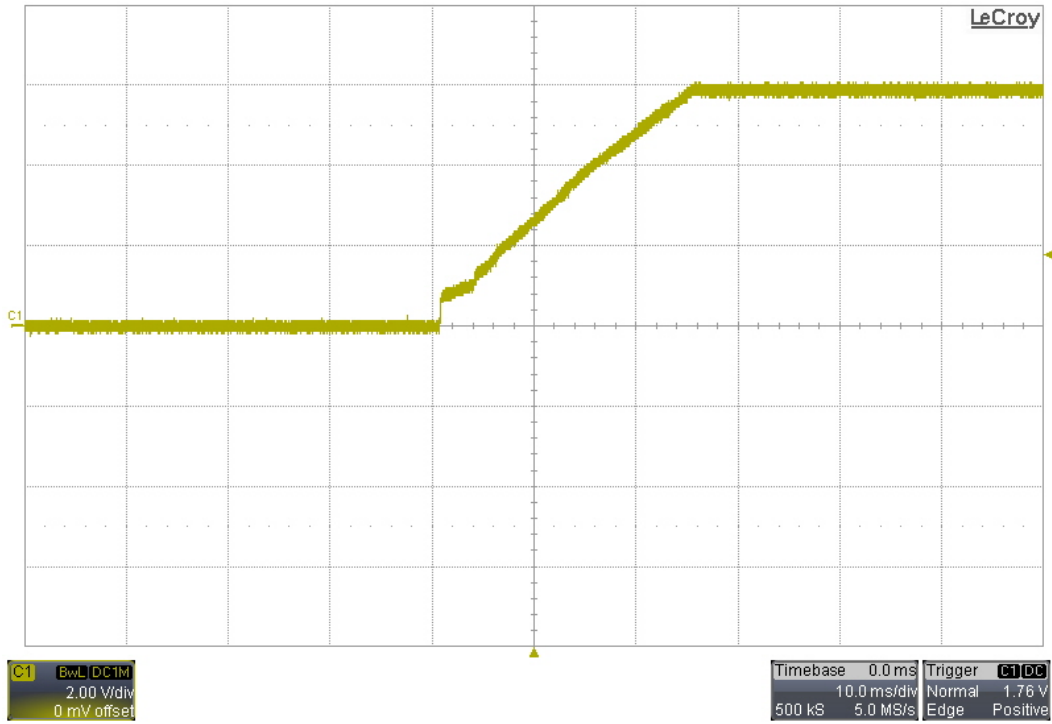


4.4 60V Input, 0.5Ω Load

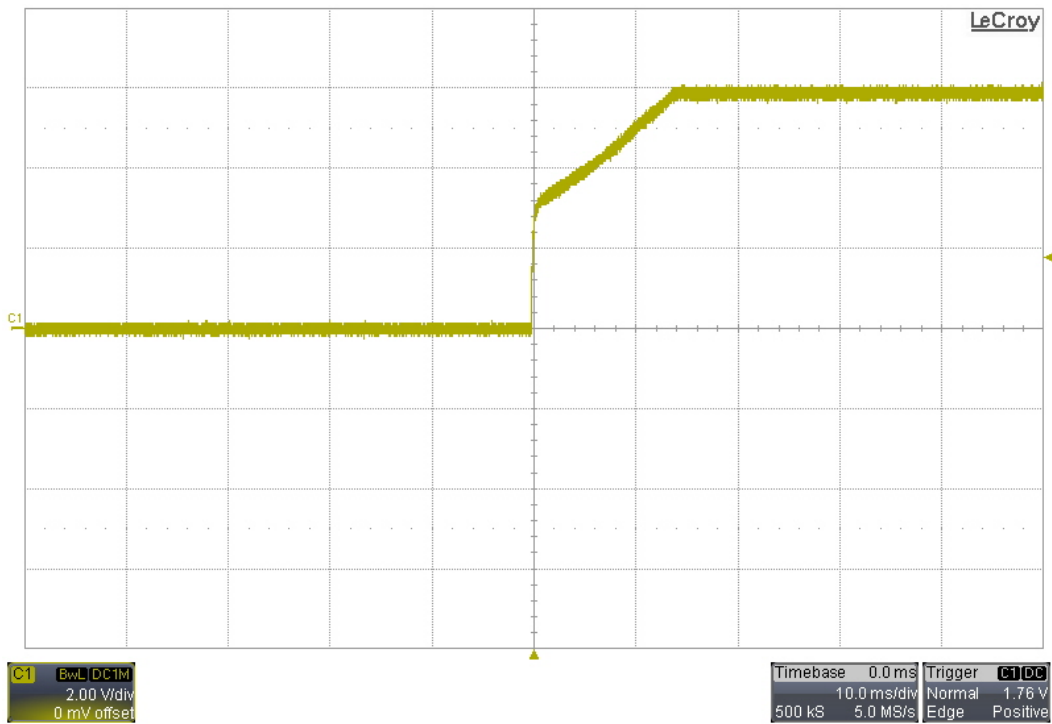


5 Output Ripple Voltage


5.1 18V Input, 31A Load

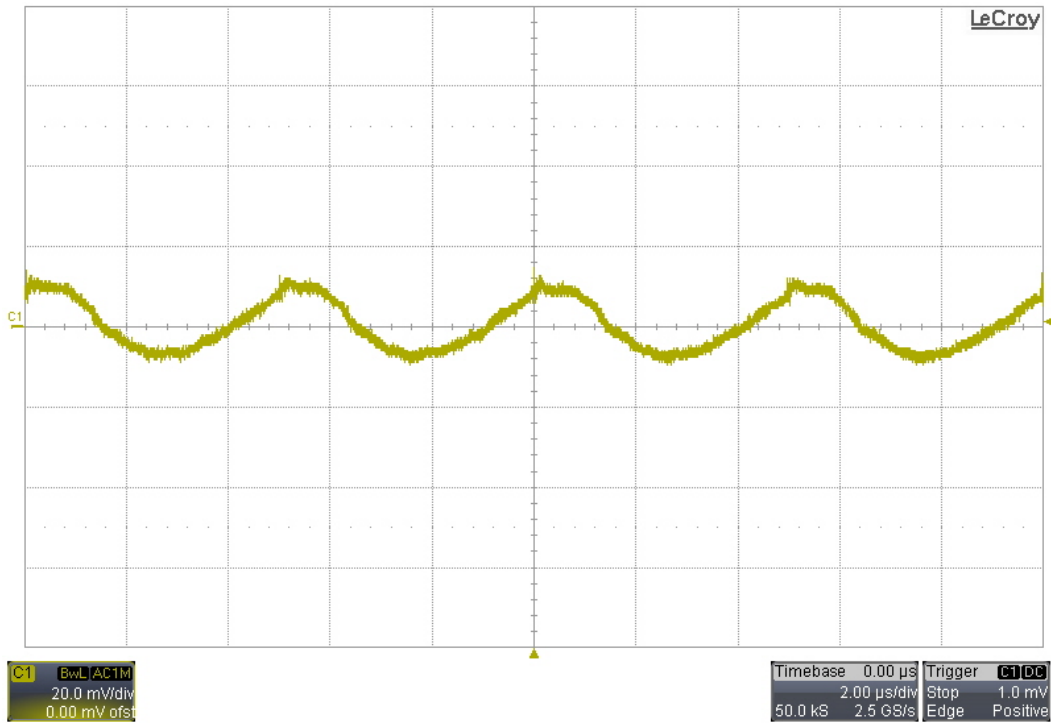

5.2 60V Input, 31A Load

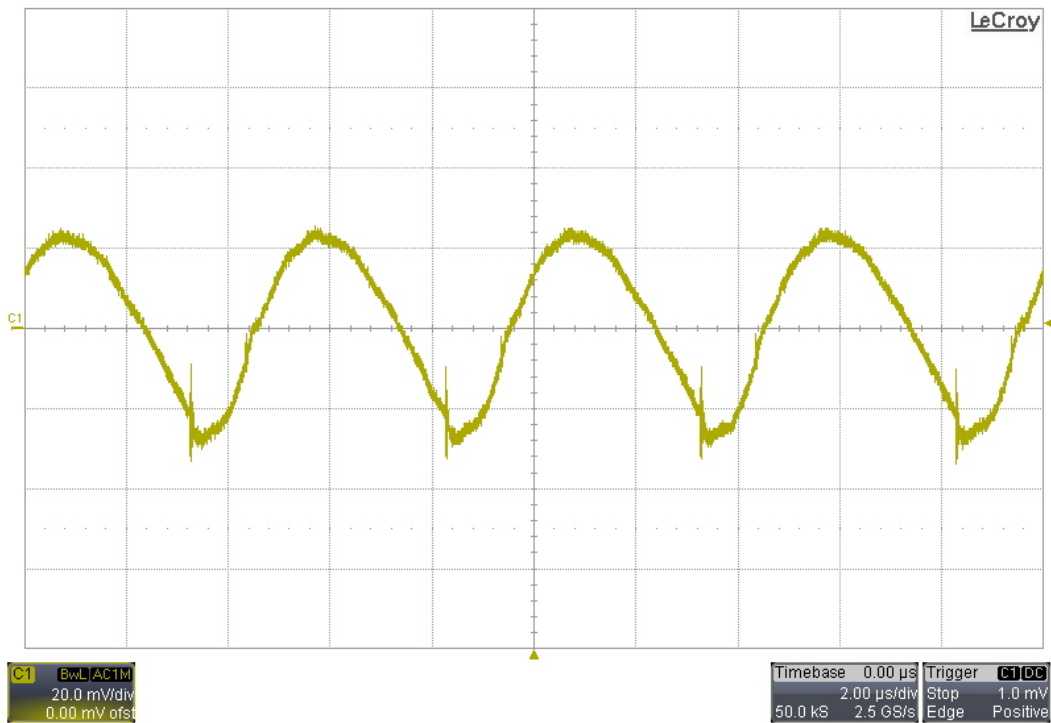


6 Frequency Response

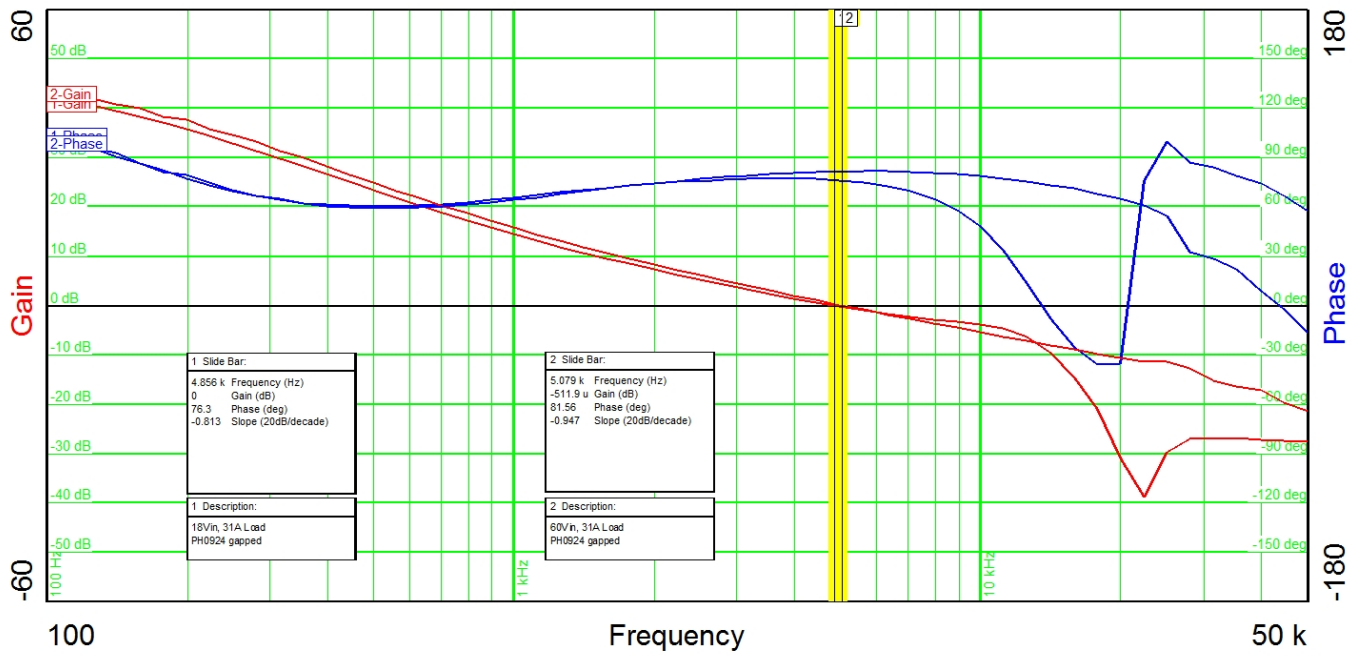


7 Load Transients

7.1 18V Input

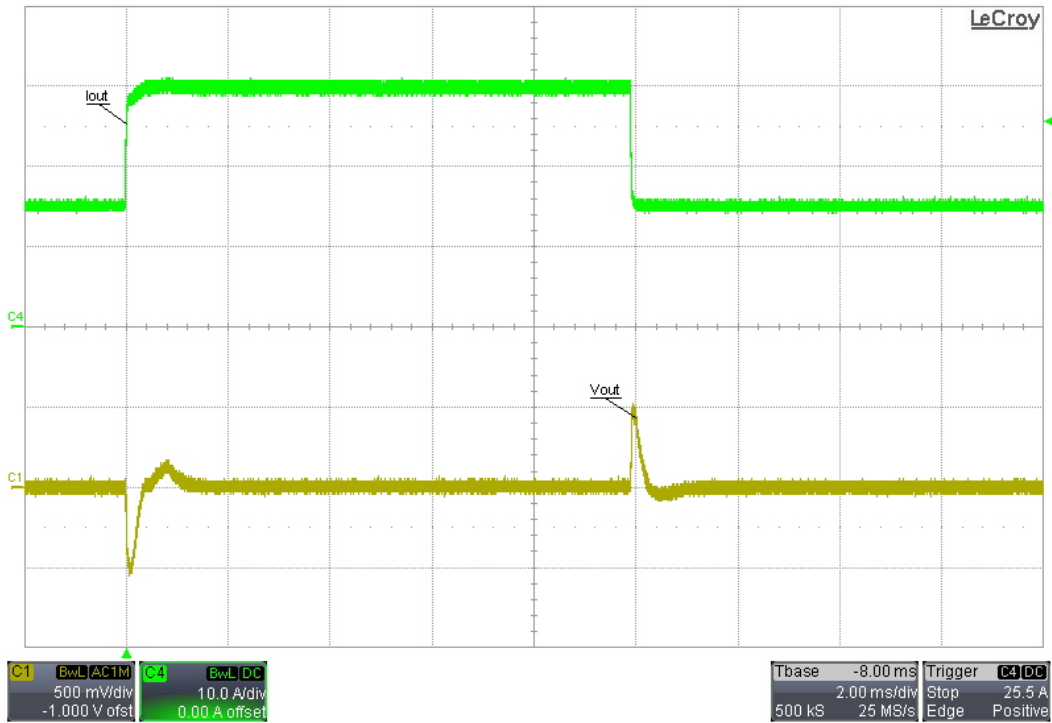


7.2 60V Input

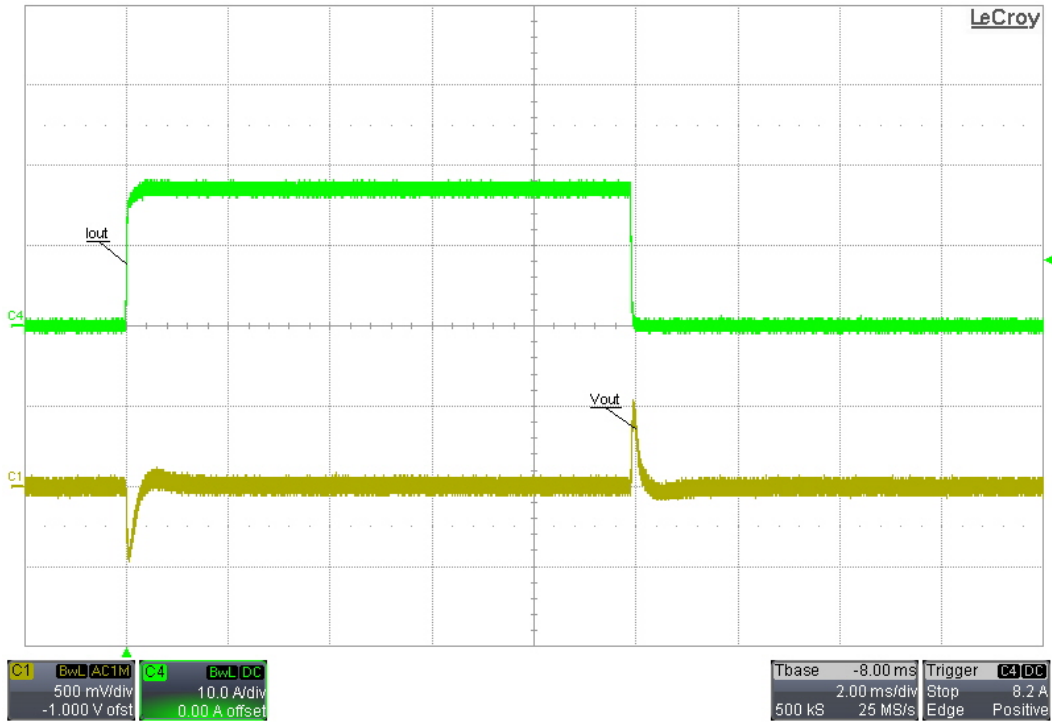


8 Switching Waveforms


8.1 Primary FET Vds (Q4 & Q6) – 18Vin, 31A Load

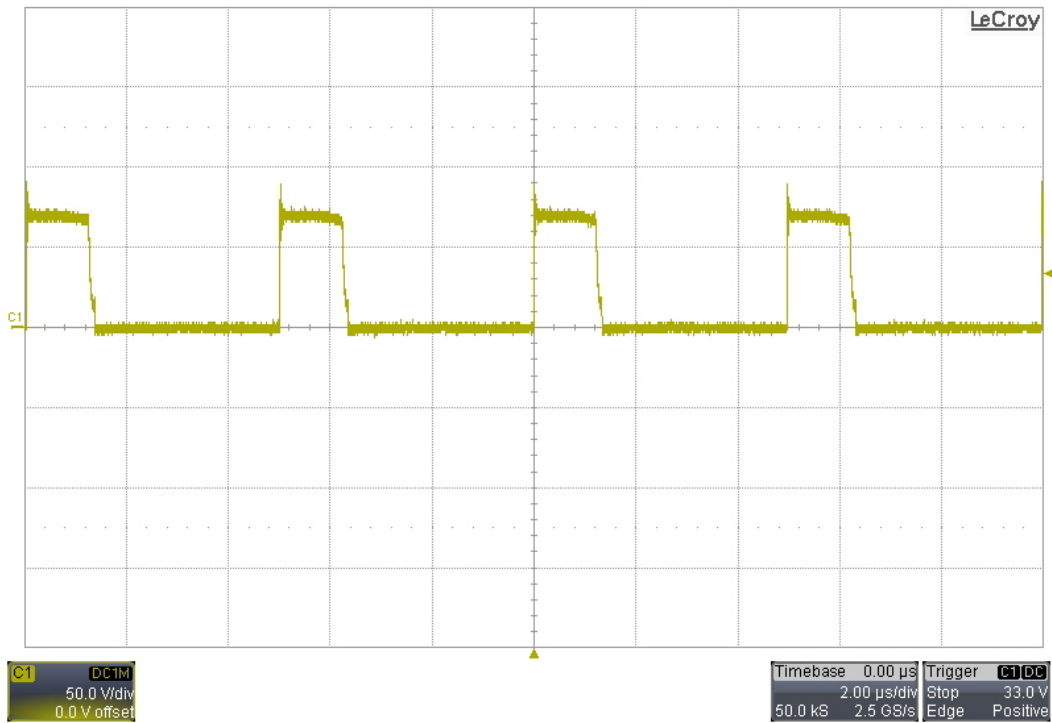


8.2 Primary FET Vds (Q4 & Q6) – 60Vin, 31A Load

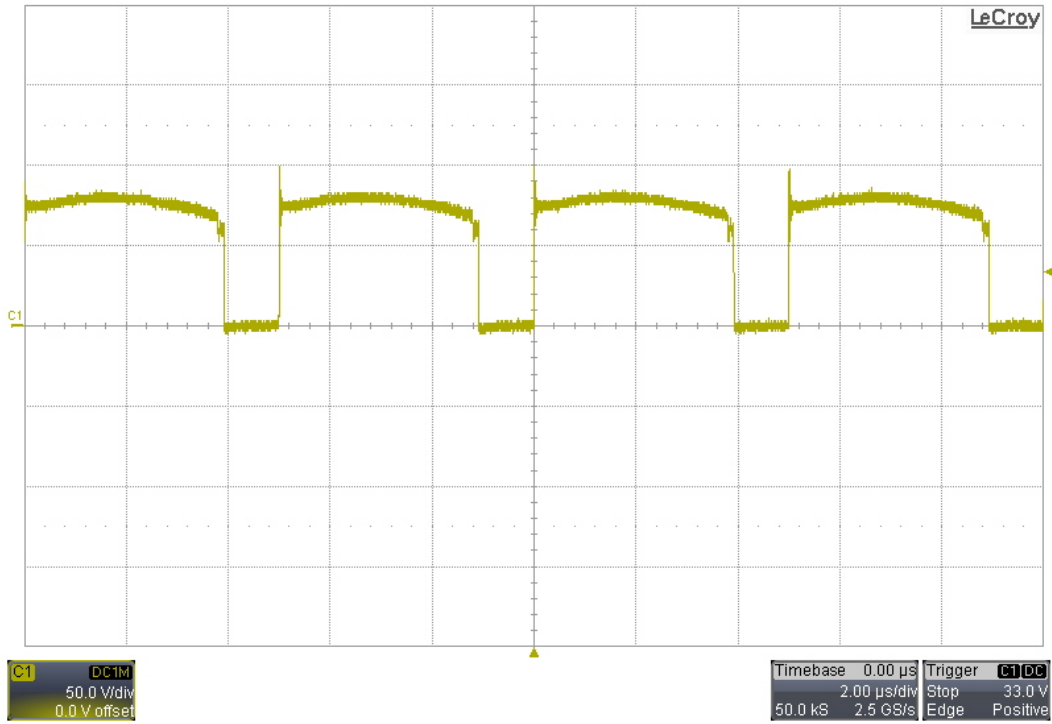


8.3 Sync FET Vds (Q1 & Q7) – 18Vin, 31A Load

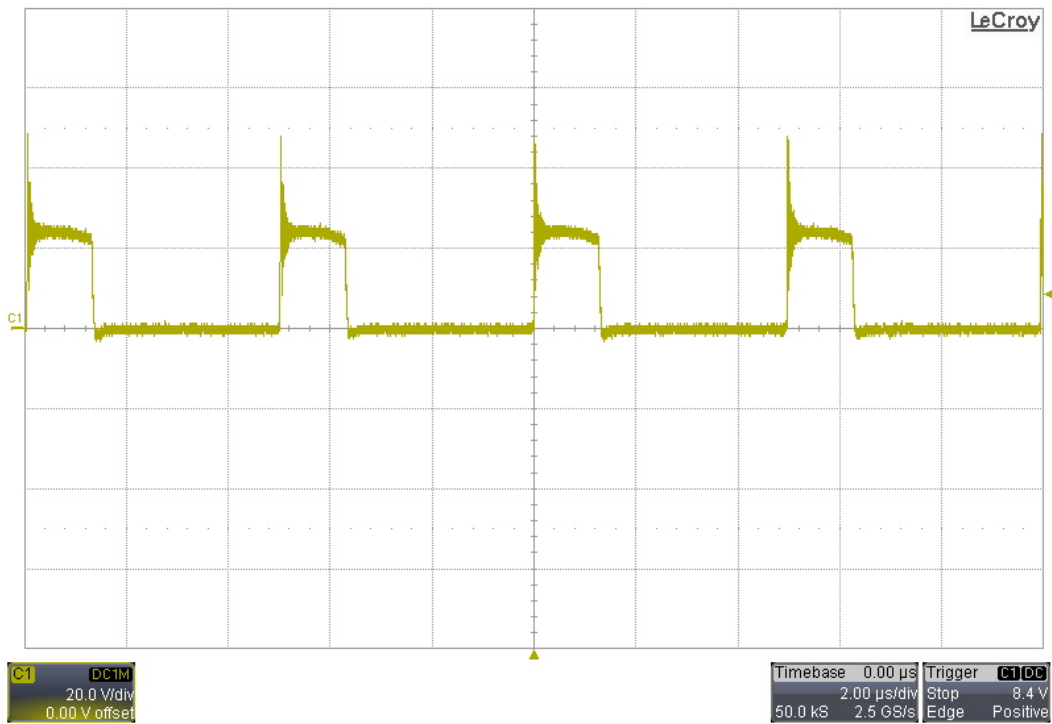


8.4 Sync FET Vds (Q1 & Q7) – 60V_{in}, 31A Load

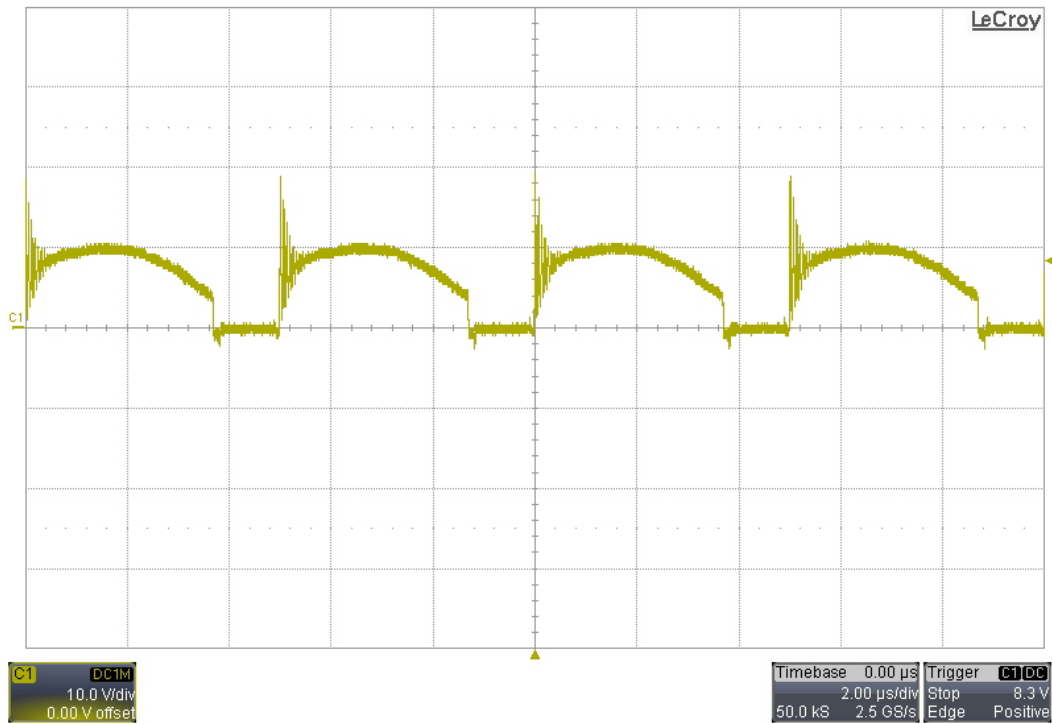

8.5 Sync FETs Vds (Q2 & Q5) – 18V_{in}, 31A Load

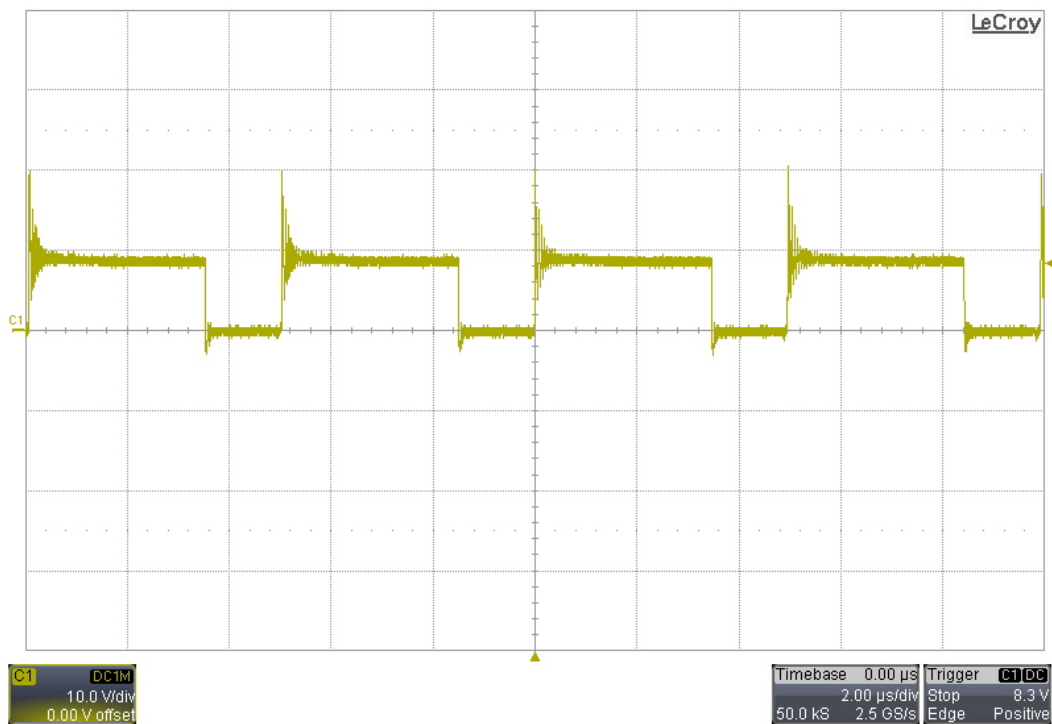

8.6 Sync FET Vds (Q2 & q5) – 60Vin, 31A Load

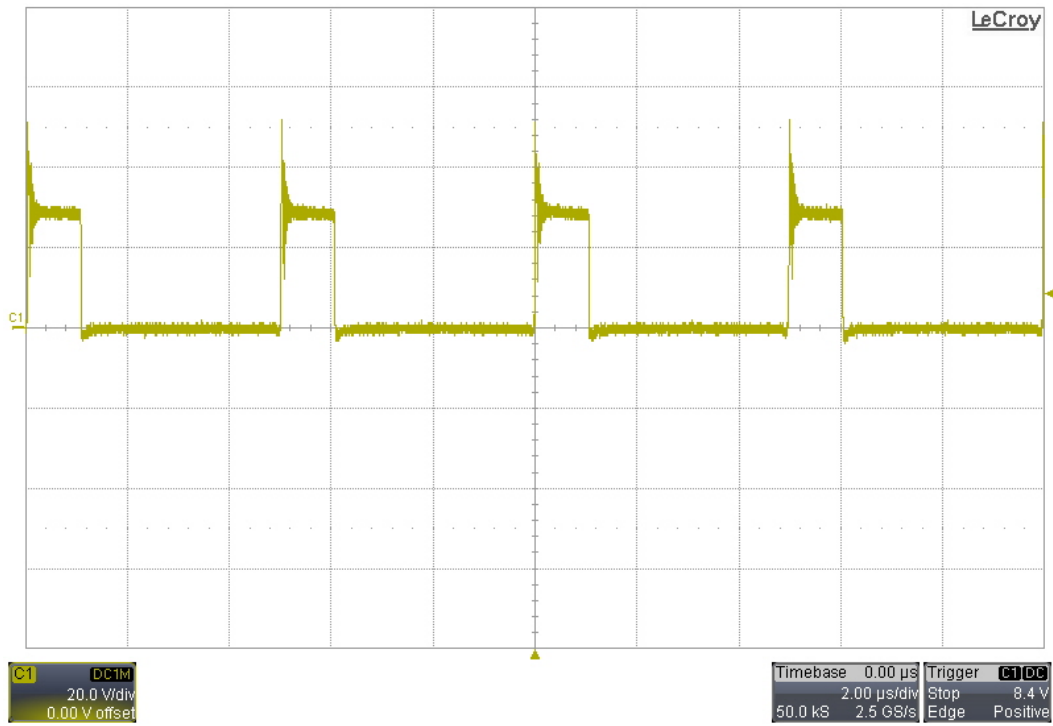

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated