

# ***How to do calibration and create Golden DFI for host side gas gauge***

---

## **ABSTRACT**

TI host-side gas gauges are now adopted more and more widely in Smartphone and tablet PC market; but, many customers are not quite familiar with the flash parameter setting. Except for the parameters related to the cell chemistry, the tests corresponding to the circuit board characteristics have to be completed at customer side. These calibration data eventually have to be merged into the overall DFI file which is most likely generated using an EVM. The file contains the fine-tuned chemistry data. The connecting diagram on how to do calibration, illustrated in this application note, can also be referred to for host-side gas gauge calibration on mass production line. The method described in this app note is based on the bq27510, but actually, it is suitable for other TI host-side gas gauges

---

## **Contents**

### **1. Introduction**

TI host-side gauge is known to work with the TI patented IT (Impedance Tracking) Algorithm; hence, it is able to offer the best accuracy for SOC. This accuracy is far beyond the end user's conventional expectation, given the parameters are set properly. However, as a pack-side gas gauge, a Golden DFI file has to be created to achieve an ideal accuracy. For instructions on how to create the Golden DFI file for a TI handheld gas gauge, see the application note [SLUA544.pdf](#). Because the host-side gauge is different from a pack-side gas gauge, the test for the circuit-board calibration and the test for cell chemistry need to be done respectively on different platforms.


### **2. Special considerations on how to generate the Cell Characteristic data**

Cell Characteristic data set includes two important data sets for gas gauging algorithm, which are usually named as Chemical ID and RA table (please refer to [SLUA544](#)). Cycling tests are needed to acquire the data for Chemical ID and RA table creation. For the pack-side gauge, customer uses the actual PCM to do the experiments; but, for the host-side gauge, there are many other components on the actual circuit boards. Also for most conditions there is no way to only power up the gauge with all other devices in power off state. This is because 1) Gauge is powered from BAT input on the board while power is applied to BAT input; all other section circuits are also powered up. 2) There are two pullup resistors on the I<sup>2</sup>C bus of the system. Without pullup voltage applied to I<sup>2</sup>C, the I<sup>2</sup>C communication will not work. Customer always tends to use 1.8V as the I<sup>2</sup>C pullup voltage; this must be provided by system. If the system is not powered up, the pullup voltage will not be available. 3) External pullup is also infeasible, the power supply for pulling up I<sup>2</sup>C will be drawn by the powered off system. Please see figure 1 for reference.

In figure 1, the system-side circuit will be sinking the current I from the pullup voltage; but, I is not

enough to power up the system-side circuit due to the limited current sourcing capability and the pullup resistors. The voltage on I<sup>2</sup>C pin will be pulled down, thus I<sup>2</sup>C communication can not be setup. While the system-side circuit is turned on, then the discharge current to the battery can not be controlled as desired, either for Chemical ID test or RA table test.

With above considerations, the battery characteristic data has to be generated with an EVM.

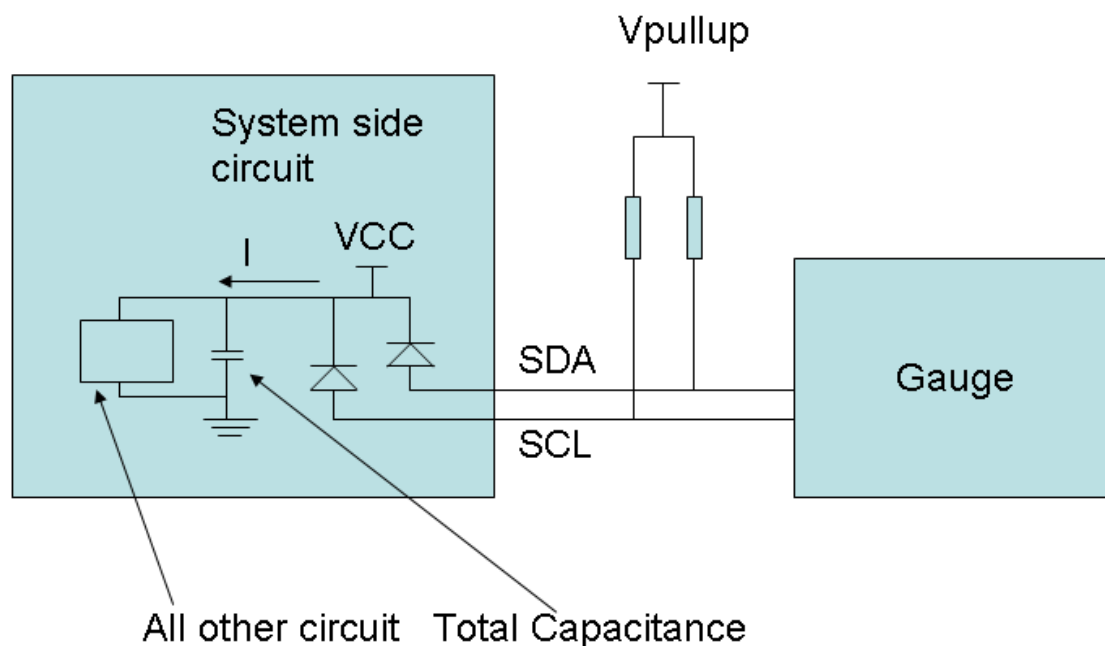

**Figure 1**

### 3. Generating the board characteristic data

Generating the board characteristic data actually means calibrating the gas gauge on the customer board for Voltage, Current and Temperature measurement. The actual calibration items are described in document [SLUA449](#), and calibration should be done item by item each time, instead of doing all calibration concurrently. There are several special concerns to be considered for host-side gauge calibration.

- The correct sequence for these items is CC Offset Calibration, Board Offset Calibration, Voltage Calibration, Temperature Calibration, and Pack Current Calibration.
- For board offset calibration and cc offset calibration, the current to the system should be 0, which is not possible when connecting the power supply to BAT power input (BAT+, BAT-) of the system board. The “-” terminal of the power supply input has to be connected to the common reference point “VSS” or “GND” of the system-side circuit.
- Another power supply with current limitation function should be used as the current source for current calibration; only one point for nonzero current needs to be calibrated. The current limit for the power supply should be set to the desired calibration point. If mostly the system sees an average current at about 1000mA or so, then you can set the current limitation on the power supply to 1000mA.

A correct connecting diagram is shown in figure 2.

#### 4. Connection setup for host-side calibration

As per the requests described in above section, connect the calibration configuration shown in figure 2:

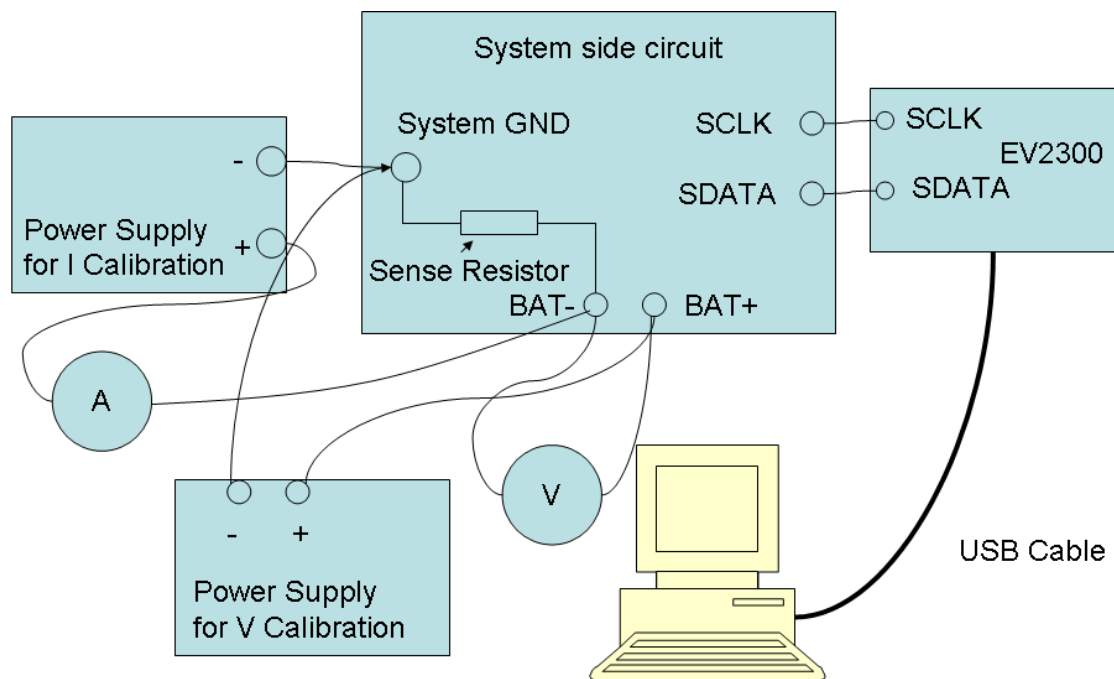



Figure 2

In figure 2, *Power Supply for I Calibration* is a power supply to source the desired current for Pack Current Calibration, *Power Supply for V Calibration* is the Power supply for voltage calibration. The voltage can be set to 3.6V or so for voltage calibration. EV2300 is a USB-to-I<sup>2</sup>C interface which is used for data reading from the gas gauge on the System-Side Circuit for TI EVSW running on the PC. The position of gas gauge on the system-side board is not important for understanding the diagram, so bq27510 is not shown in figure 2.

**Please also note that all connection points in the BLOCK of “System-side circuit” should be implemented as test pads when doing PCB layout.**

## 5. Data processing

The data related to Calibration is circled in figure3

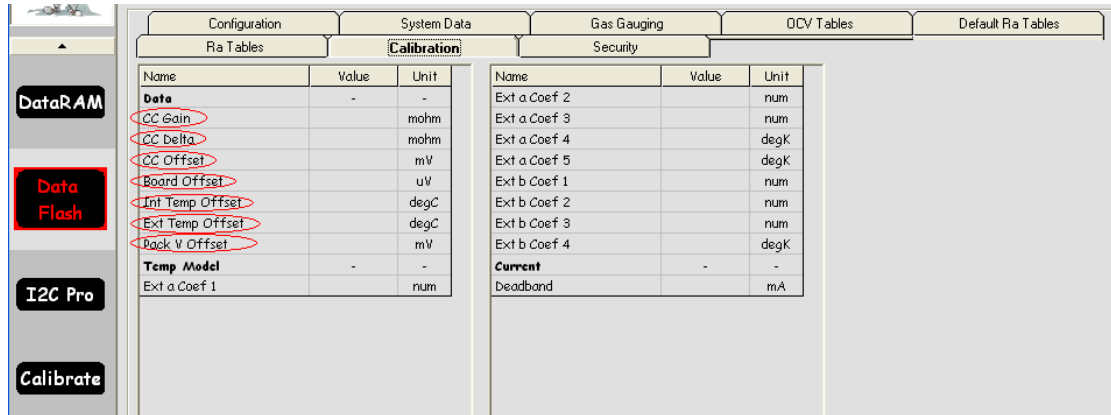

Name	Value	Unit	Name	Value	Unit
Data	-	-	Ext a Coef 2		num
CC Gain		mohm	Ext a Coef 3		num
CC Delta		mohm	Ext a Coef 4		degK
CC Offset		mV	Ext a Coef 5		degK
Board Offset		uV	Ext b Coef 1		num
Int Temp Offset		degC	Ext b Coef 2		num
Ext Temp Offset		degC	Ext b Coef 3		num
Pack V Offset		mV	Ext b Coef 4		degK
Temp Model		-	Current		-
Ext a Coef 1		num	Deadband		mA

Figure 3

20 to 30 sample boards with gas gauges should be calibrated, and the data in figure 3, marked by red, should be extracted and averaged. After data extraction and averaging download the Golden DFI, created using the EVM and customer battery, to a target device bq27510 with the correct firmware (FW) version number. Modify the parameters marked by red in figure 3 to the averaged calibration data from the 20 to 30 sample boards; then, the final golden DFI can be extracted for production.

## 6. Conclusion

With above thoughts, the calibration method can be used not only for Engineering sample calibration, but also for the host-side gas gauge calibration for mass production.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated