

# **DS91M047**

## **125 MHz Quad M-LVDS Driver**

### **Evaluation Kit**

# ***USER MANUAL***

**Part Number: DS91M047EVK NOPB**

For the latest documents concerning these products and evaluation kit, visit [lvds.national.com](http://lvds.national.com). Schematics and gerber files are also available at [lvds.national.com](http://lvds.national.com)


## Overview

The purpose of this document is to familiarize you with the DS91M047 evaluation board, suggest the test setup procedures and instrumentation, and to guide you through some typical measurements that will demonstrate the performance of the device. The board enables the user to examine performance and all functions of the DS91M047 as a standalone device.

The DS91M047 is a high-speed quad M-LVDS differential line driver designed for multipoint applications with multiple drivers or receivers. The device conforms to TIA/EIA-899 standard. It utilizes M-LVDS technology for low power, high-speed and superior noise immunity.

## Description

Figure 1 below represents the top layer drawing of the board with the silkscreen annotations. It is a 2.5 x 3 inch 4 layer printed circuit board (PCB) that features a single DS91M047 (U1) device.

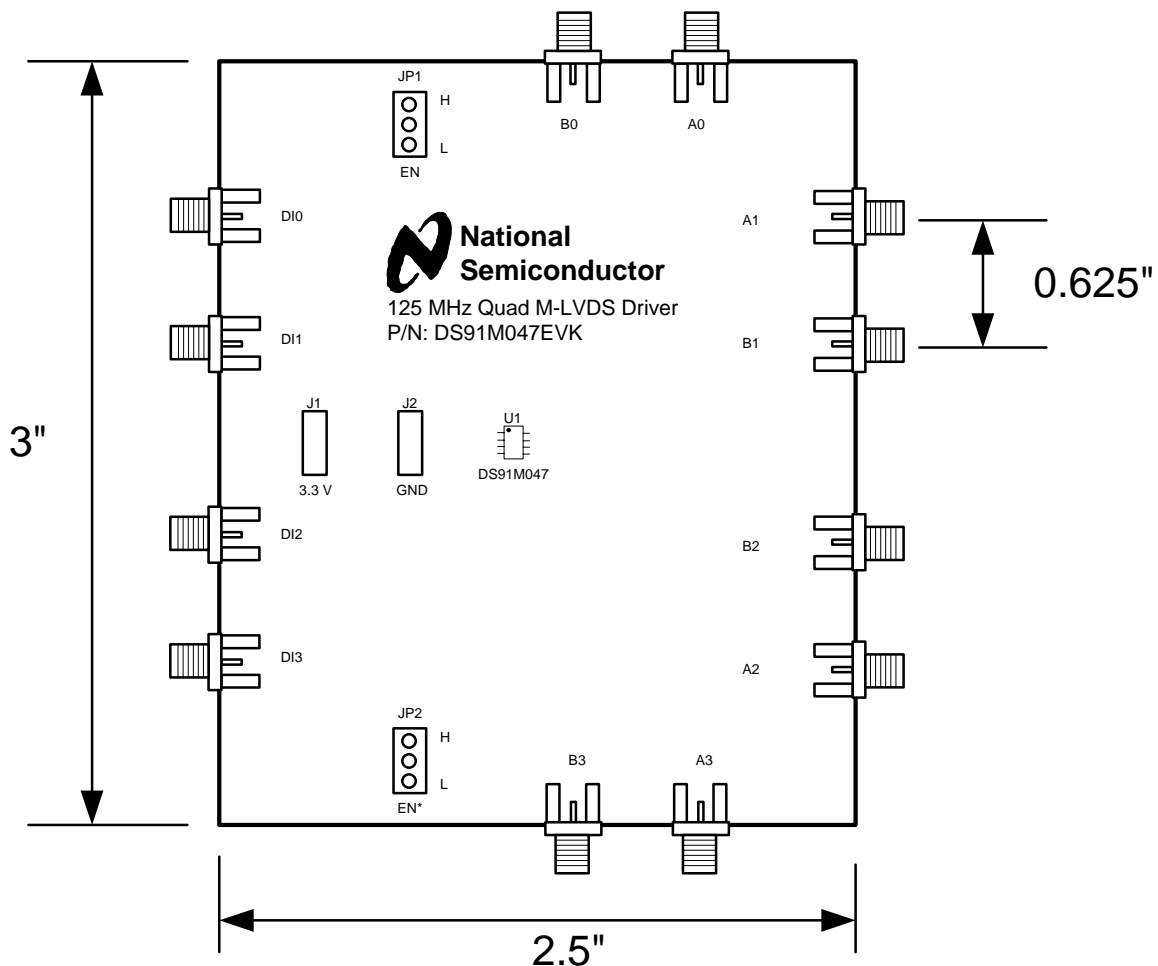


**Figure 1 - DS91M047EVK Top View Drawing**

## DS91M047 Evaluation in a Point-to-Point Link


The following is a recommended procedure for using and evaluating the DS91M047EVK. Figure 2 depicts a typical setup and instrumentation used.

1. Select a single DS91M047 evaluation board.
2. Apply the power to the board (3.3 V typical) between J1 and J2 power tabs, observe the value of  $I_{CC}$ , and compare it with the expected value (refer to the datasheet) to ensure that the devices are functional.
3. Enable U1 driver outputs. This is accomplished by setting the EN pin to VDD (JP1) or EN\* pin to GND (JP2).
4. Connect a signal source to one of the driver inputs (DI0-3).
5. Connect one of the U1 outputs (A0-3/B0-3) to an oscilloscope and observe the waveforms.

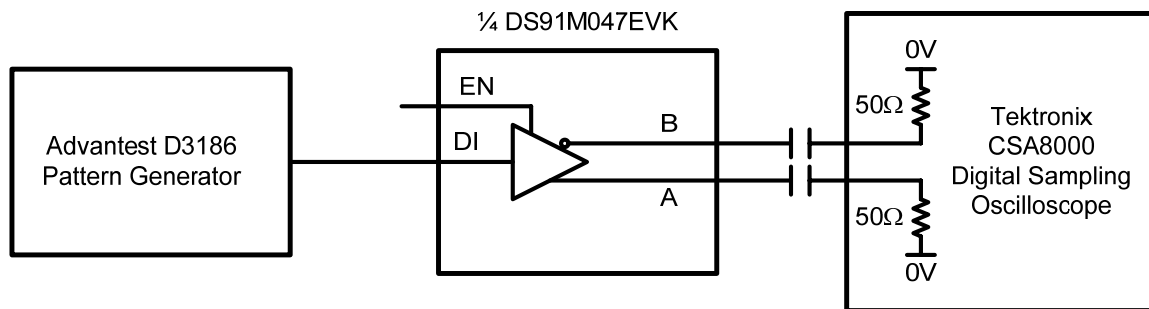

**Figure 2 – DS91M047 Test Setup**

Figure 3 shows an eye diagram acquired at the output of the DS91M047 driver loaded with a 100-ohm resistor. The generator connected to the driver input simulated a 100 Mbps PRBS-7 NRZ.

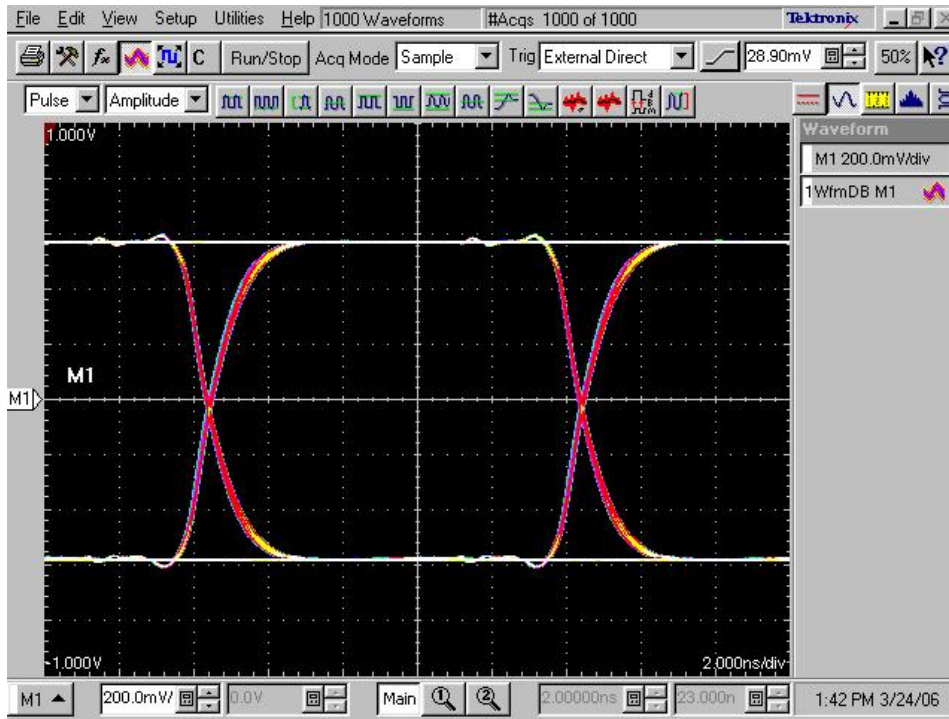

**Figure 3 – DS91M047 Output**

**ENERCON - BILL OF MATERIALS**

TITLE:

**NATIONAL SEMICONDUCTOR  
PCBA, DS91M047EVK, ROHS  
DS91M047**PL Number: **Z3250-01** Rev: **1** Rev By: **BJ**Rev Date: **04/30/08**PL Status: **Released**Main Product:  
**PCBA, DS91M047EVK, ROHS**

Responsible Eng/Mgr:

Creator:  
**Arlene Fox**Creation Date:  
**03/13/08**

Item	Part Type	Part Number/Value	Mfg	NoSub	Description	Qty	SMT	Ref Des	Notes	Rev
1	PCB	P-06540R0	ENERCON			1				0
2										
3	SUBASY	Z3211-04	ENERCON		LABEL, MADE IN U.S.A.	1			Apply to bottom of PCBA	1
4										
5	IC	DS91M047TMA	NAT		125MHz Line Driver, SOIC16, Pb-Free	1	X	U1		0
6										
7	CAP	06035C103KAT	AVX		.01µF, 50V, ±10%, 0603, Ceramic, X7R, Pb-Free	2	X	C3,6		0
8	CAP	0603YC104KAT	AVX		.1µF, 16V, ±10%, 0603, Ceramic, X7R, Pb-Free	2	X	C2,4		0
9	CAP	TAJA106K016	AVX		10µF, 16V, ±10%, A-Case, Tantalum, Pb-Free	1	X	C1		0
10										
11	CONN	1287	KEYSTONE		Faston, Male, .250", Pb-Free	2		J1,2		0
12	CONN	142-0701-851	EMERSON		SMA, Jack Receptacle, 50 OHM, Pb-Free	12		SMA1-12		0
13	CONN	15-29-1024	MOLEX		Jumper Shunt, 2p, Gold, Pb-Free	2			Use on JP1,2 Pins 2&3	0
14	CONN	TSW-103-07-G-S	SAMTEC		Header, 3p, Male, .100"sp, Gold, Pb-Free	2		JP1,2		0
15										
16	STENCL	T-06543R0	ENERCON		STENCIL FABRICATION, TOP, DS91M047EVK/DS91M124E...	1				0
17										
18	REF	C-06541R0	ENERCON		FAB DWG, DS91M047EVK/DS91M124EVK/DS91M125EVK					0
19	REF	C-06542R0	ENERCON		PALLET DWG, DS91M047EVK/DS91M124EVK/DS91M125EVK					0
20	REF	S-06539R0	ENERCON		SCHEMATIC, DS91M047EVK/DS91M124EVK/DS91M125EVK					0
21										

<b>ENERCON - BILL OF MATERIALS</b>	TITLE: NATIONAL SEMICONDUCTOR PCBA, DS91M047EVK, ROHS DS91M047	PL Number: Z3250-01	Rev: 1	Rev By: BJ	Rev Date: 04/30/08	PL Status: Released
		Responsible Eng/Mgr:		Creator: Arlene Fox	Creation Date: 03/13/08	
Main Product: PCBA, DS91M047EVK, ROHS						

Notes:

DO NOT STUFF:

U2

M1-10

JP3,4,5,6

R1-15

T1-2,7,15,17,19,21,23,3,11,12,16,18,20,22,24

J3,4

C5,7,8,9,10

SMA13-22

6

5


4

3

2


1

REVISION RECORD			
LTR:	ECO NO:	APPROVED:	DATE:
0	INITIAL RELEASE		

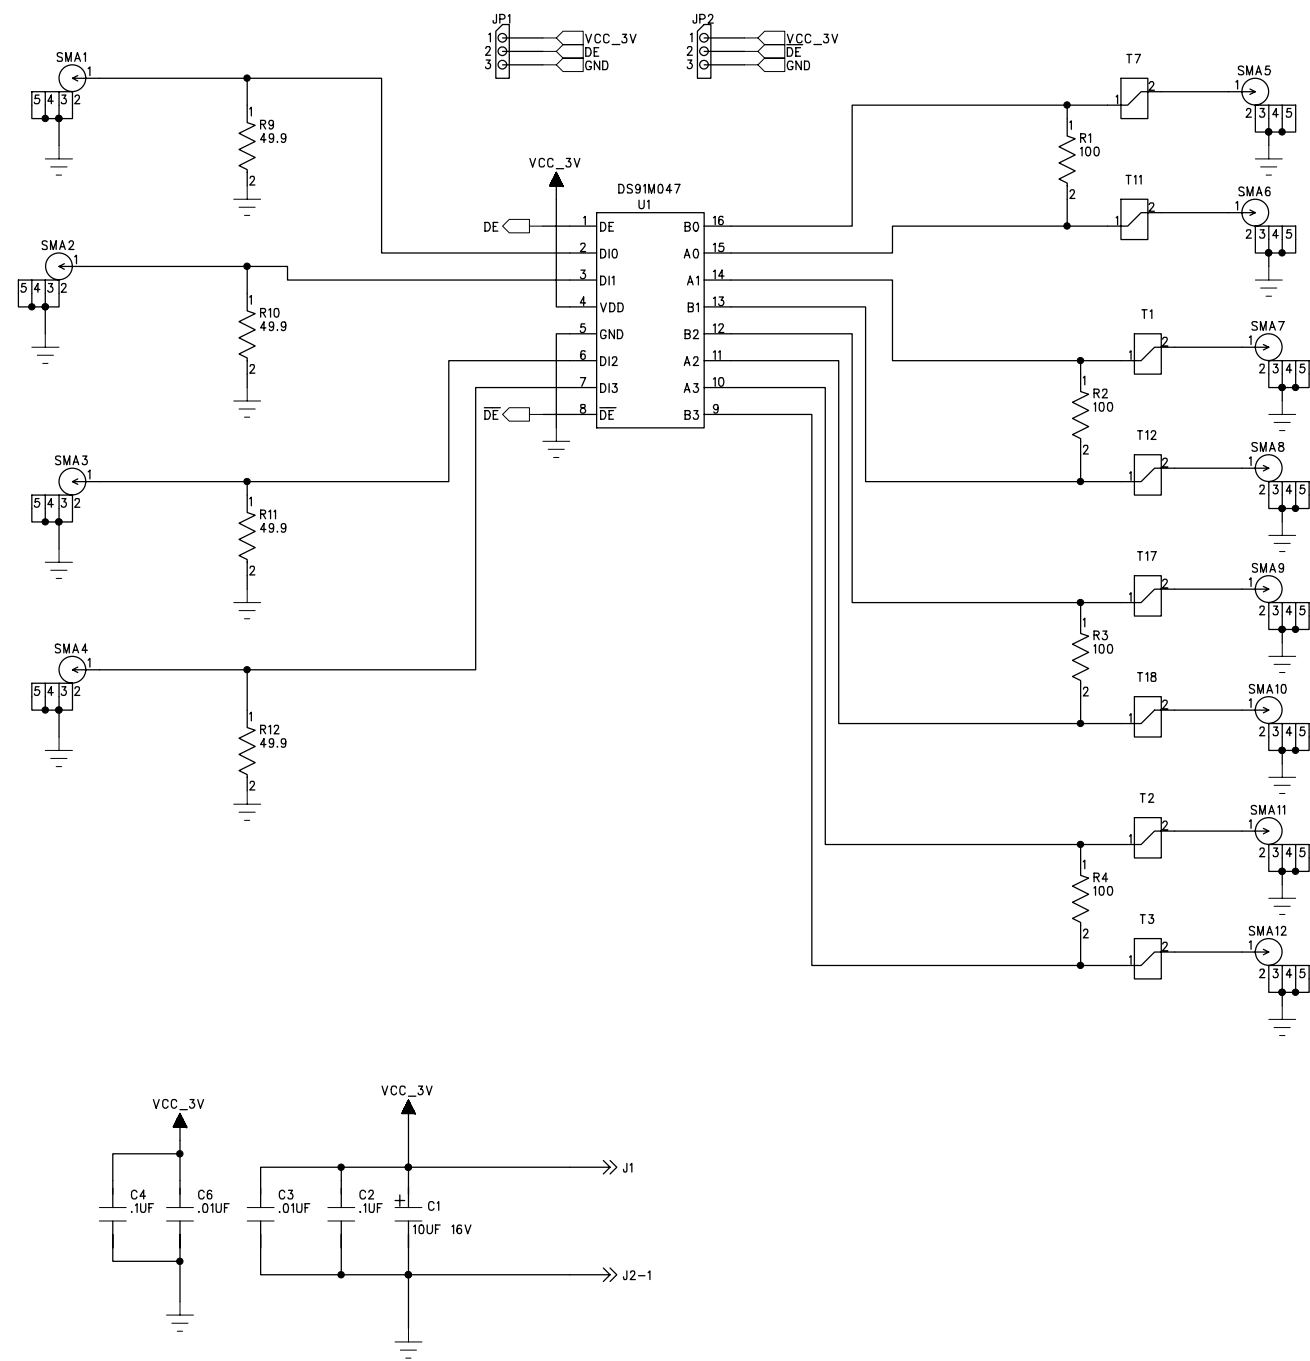

COMPANY: NATIONAL SEMICONDUCTOR			
TITLE: SCHEMATIC DS91M047EVK/DS91M124EVK/DS91M125EVK			

CODE:	SIZE: C	DRAWING NO: S-06539	REV: 0
-------	---------	---------------------	--------


 25 NorthBrook Drive  
 Gray, Maine 04039  
 U.S.A.

DRAWN: ACF  
 DATED: 3/11/08

6

5




4

3

2

1

REVISION RECORD			
LTR:	ECO NO:	APPROVED:	DATE:
0	INITIAL RELEASE		

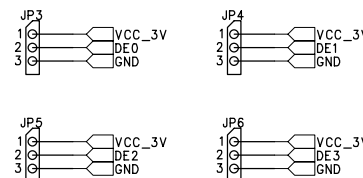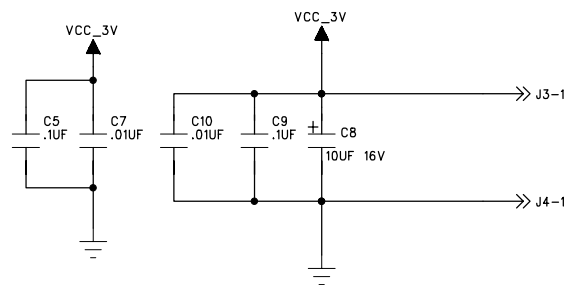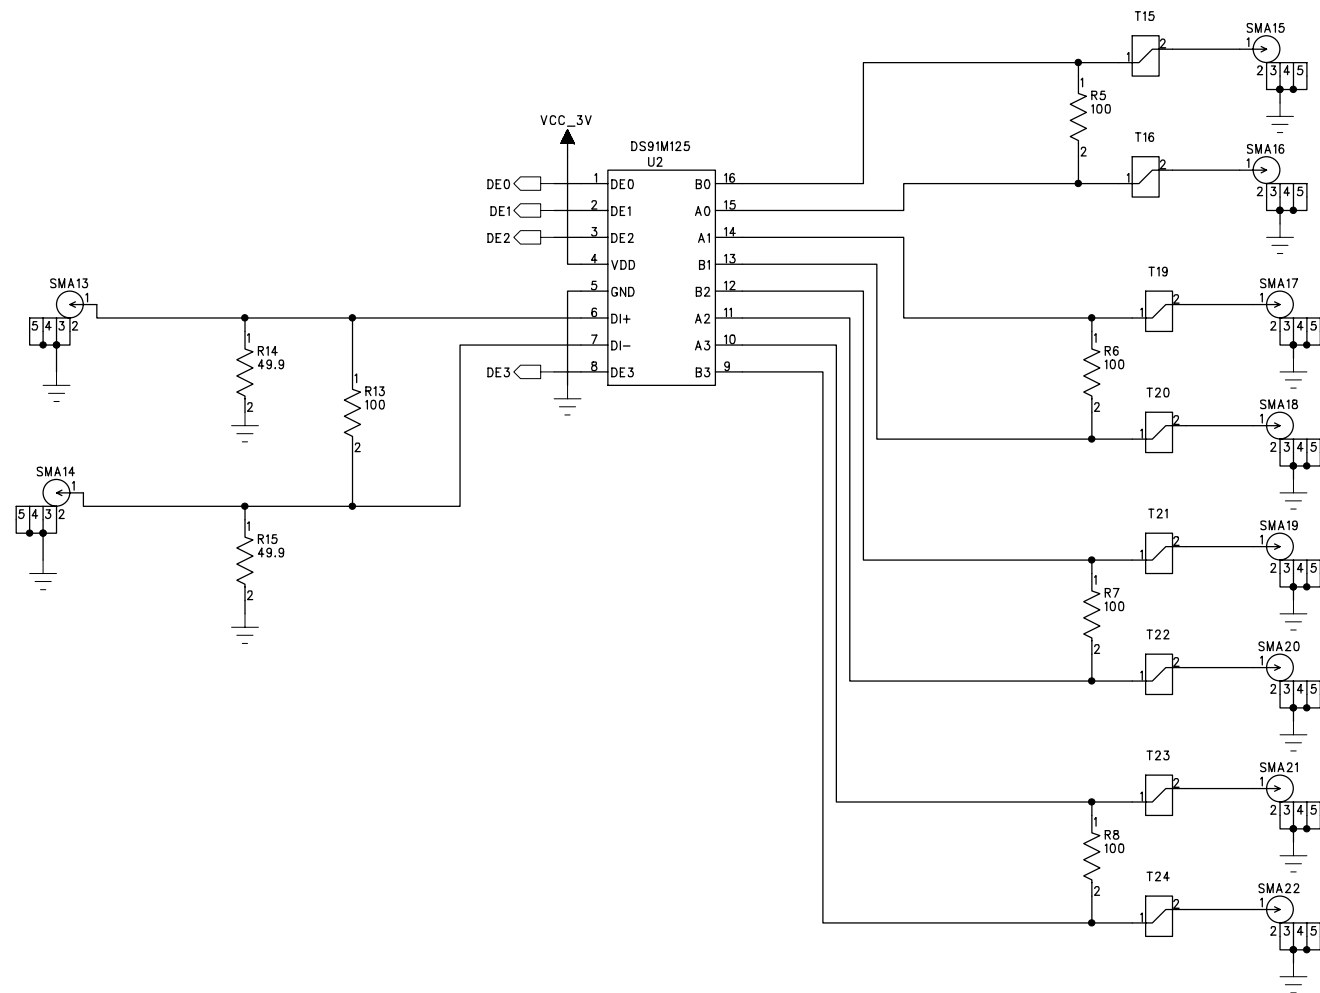

COMPANY:	NATIONAL SEMICONDUCTOR		
TITLE:	SCHEMATIC DS91M047EVK/DS91M124EVK/DS91M125EVK		

 25 NorthBrook Drive Gray, Maine 04039 U.S.A.	CODE:	SIZE:	DRAWING NO:	REV:
		C	S-6539	0
DRAWN: ACF	DATED: 3/11/08	SCALE:		SHEET: 2 OF 2

D

D

C

C

B


B

A


A






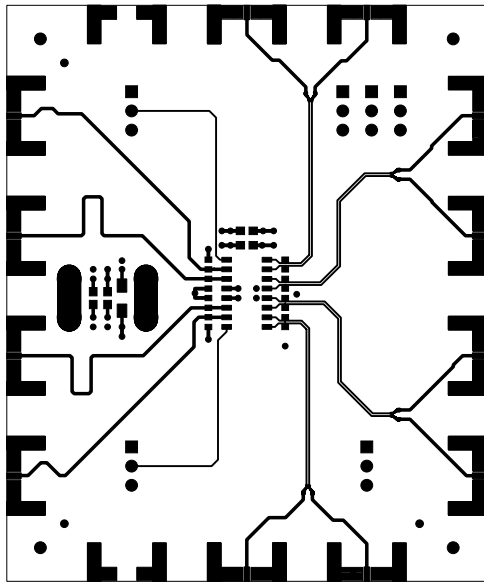


-  
TOP

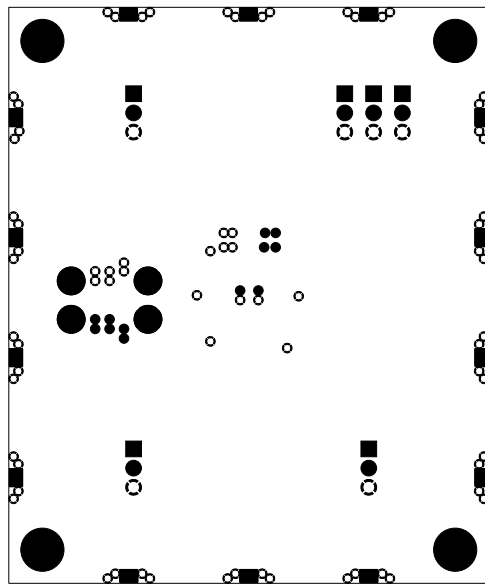


-  
LAYER 2

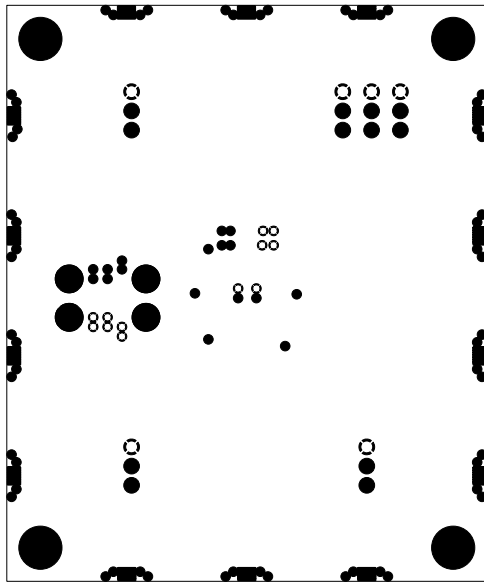


LAYER 3

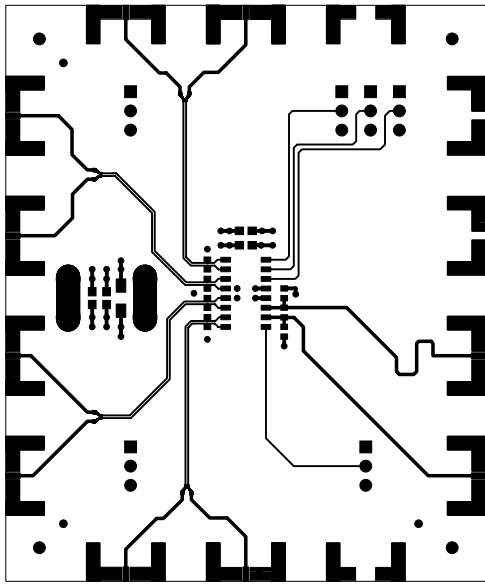


BOTTOM

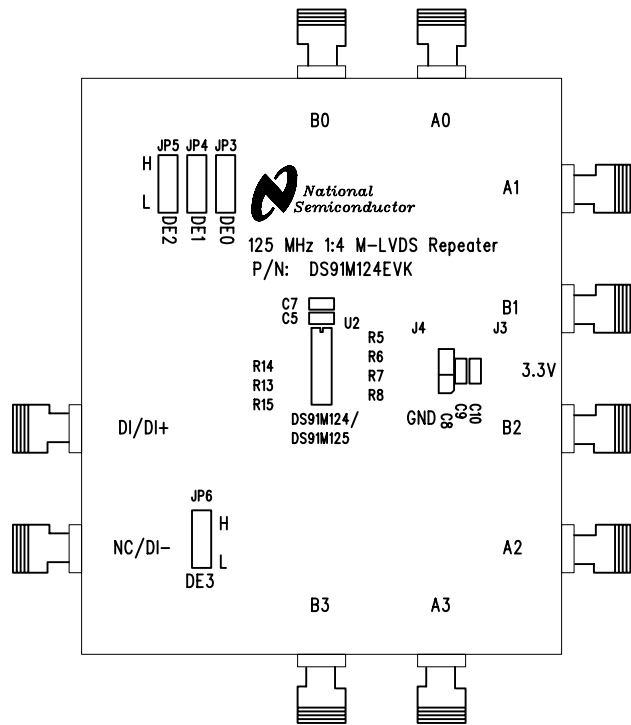

SILKSCREEN BOTTOM

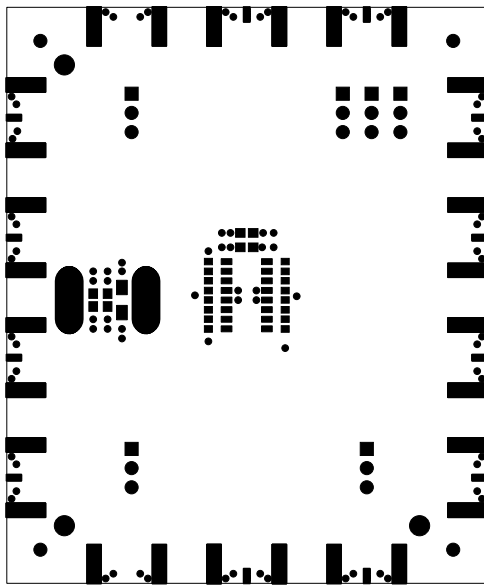


-  
SOLDERMASK TOP

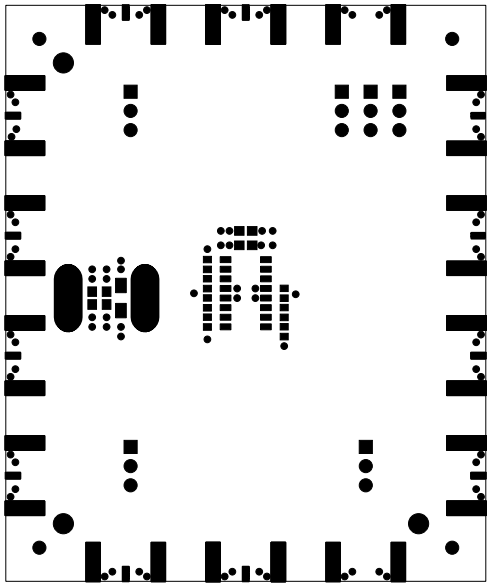


20LDERMA3K BOTLDM



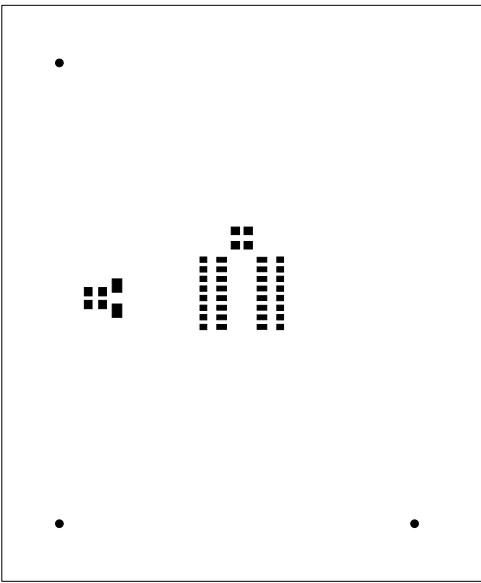

-  
SOLDERPASTE TOP  
SQUEEGEE VIEW

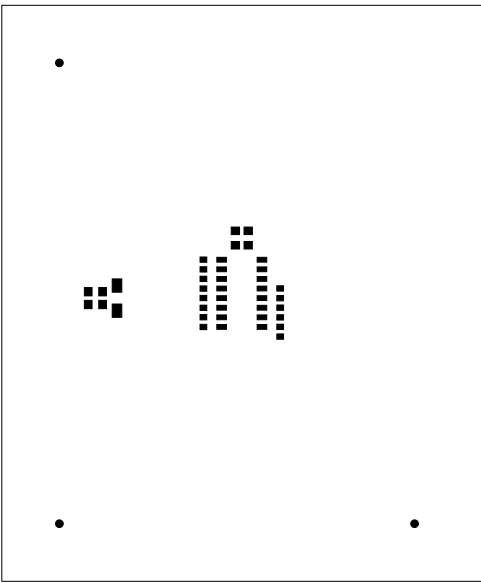

SOLDERPASTE BOTTOM

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated