

# 30V to 60V Input, 240W Buck Converter Reference Design with GaN Switches



## Description


This reference design is a power supply generating a regulated 12V output from a nominal 48V battery input (ranging from 30V to 60V). The circuit is designed for 20A continuous output current. The *LM5148-Q1* buck controller provides switching signals to a *LMG2100R044* half-bridge GaN power stage with integrated gate driver.

## Features


- Small circuit area (35mm × 37mm)
- GaN switches with top-side heatsink
- 96.4% peak efficiency at 48V<sub>in</sub>
- Designed for electromagnetic interference (EMI) (CISPR25 Class 3)
- Input EMI filter

## Applications

- [Low-voltage battery system](#)
- [2-wheeler and 3-wheeler traction drive](#)

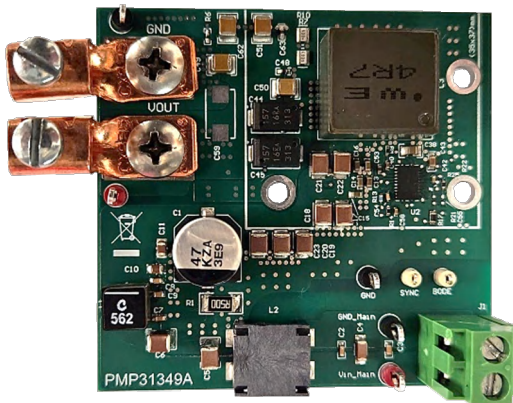

Top Photo

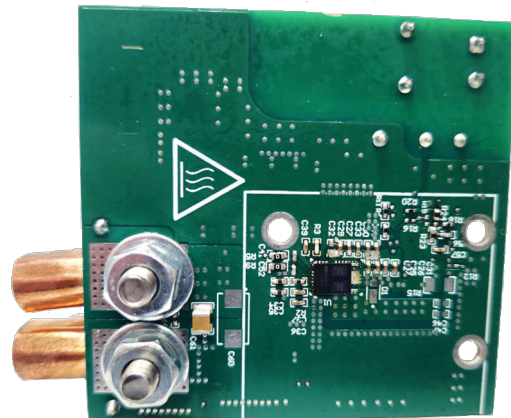

Bottom Photo

## 1 Test Prerequisites

### 1.1 Voltage and Current Requirements

**Table 1-1. Voltage and Current Requirements**

PARAMETER	SPECIFICATIONS
Input Voltage	30V to 60V
Output Voltage	12V
Output Current	20A
Switching Frequency	350kHz

### 1.2 Dimensions

The size of the board is 63.3mm × 60.0mm. The board has four copper layers with 70μm on copper thickness on each outer layer and 35μm on both inner layers.


### 1.3 Considerations

**CAUTION**

- Hot surface
- Contact can cause burns
- Do not touch

## 2 Testing and Results

### 2.1 Efficiency Graph

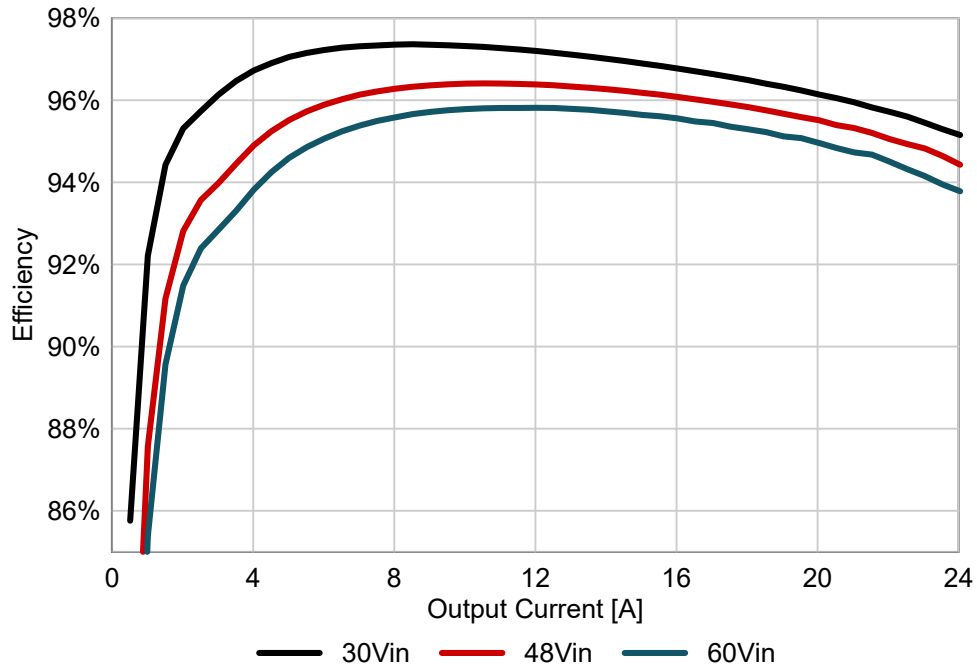

**Figure 2-1. Efficiency versus Output Current**

## 2.2 Efficiency Data

### 2.2.1 30V Input Voltage

**Table 2-1. Efficiency Data for 30V Input Voltage**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
30.0	0.0	12.0	0.0	-0.4%
30.0	0.2	12.0	0.5	85.8%
30.0	0.4	12.0	1.0	92.2%
30.0	0.6	12.0	1.5	94.4%
30.0	0.8	12.0	2.0	95.3%
30.0	1.1	12.0	2.5	95.7%
30.0	1.3	12.0	3.0	96.1%
30.0	1.5	12.0	3.5	96.5%
30.0	1.7	12.0	4.0	96.7%
30.0	1.9	12.0	4.5	96.9%
30.0	2.1	12.0	5.0	97.1%
30.0	2.3	12.0	5.5	97.2%
30.0	2.5	12.0	6.0	97.2%
30.0	2.7	12.0	6.5	97.3%
30.0	2.9	12.0	7.0	97.3%
30.0	3.1	12.0	7.5	97.3%
30.0	3.3	12.0	8.0	97.4%
30.0	3.5	12.0	8.5	97.4%
30.0	3.7	12.0	9.0	97.4%
30.0	3.9	12.0	9.5	97.3%
30.0	4.1	12.0	10.0	97.3%
30.0	4.3	12.0	10.5	97.3%
30.0	4.5	12.0	11.0	97.3%
30.0	4.7	12.0	11.5	97.2%
30.0	4.9	12.0	12.0	97.2%
30.0	5.2	12.0	12.5	97.2%
30.0	5.4	12.0	13.0	97.1%
30.0	5.6	12.0	13.5	97.1%
30.0	5.8	12.0	14.0	97.0%
30.0	6.0	12.0	14.5	97.0%
30.0	6.2	12.0	15.0	96.9%
30.0	6.4	12.0	15.5	96.8%
30.0	6.6	12.0	16.0	96.8%
30.0	6.8	12.0	16.5	96.7%
30.0	7.0	12.0	17.0	96.6%
30.0	7.3	12.0	17.5	96.6%
30.0	7.5	12.0	18.0	96.5%
30.0	7.7	12.0	18.5	96.4%
30.0	7.9	12.0	19.0	96.3%
30.0	8.1	12.0	19.5	96.2%
30.0	8.3	12.0	20.0	96.1%
30.0	8.5	12.0	20.5	96.1%
30.0	8.8	12.0	21.0	96.0%

**Table 2-1. Efficiency Data for 30V Input Voltage (continued)**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
30.0	9.0	12.0	21.5	95.8%
30.0	9.2	12.0	22.0	95.7%
30.0	9.4	12.0	22.5	95.6%
30.0	9.6	12.0	23.0	95.5%
30.0	9.9	12.0	23.5	95.3%
30.0	10.1	12.0	24.0	95.2%

### 2.2.2 48V Input Voltage

**Table 2-2. Efficiency Data for 48V Input Voltage**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
48.0	0.0	12.0	0.0	-0.2%
48.0	0.2	12.0	0.5	78.2%
48.0	0.3	12.0	1.0	87.6%
48.0	0.4	12.0	1.5	91.2%
48.0	0.5	12.0	2.0	92.8%
48.0	0.7	12.0	2.5	93.6%
48.0	0.8	12.0	3.0	94.0%
48.0	0.9	12.0	3.5	94.5%
48.0	1.1	12.0	4.0	94.9%
48.0	1.2	12.0	4.5	95.2%
48.0	1.3	12.0	5.0	95.5%
48.0	1.4	12.0	5.5	95.7%
48.0	1.6	12.0	6.0	95.9%
48.0	1.7	12.0	6.5	96.0%
48.0	1.8	12.0	7.0	96.1%
48.0	2.0	12.0	7.5	96.2%
48.0	2.1	12.0	8.0	96.3%
48.0	2.2	12.0	8.5	96.3%
48.0	2.3	12.0	9.0	96.4%
48.0	2.5	12.0	9.5	96.4%
48.0	2.6	12.0	10.0	96.4%
48.0	2.7	12.0	10.5	96.4%
48.0	2.9	12.0	11.0	96.4%
48.0	3.0	12.0	11.5	96.4%
48.0	3.1	12.0	12.0	96.4%
48.0	3.2	12.0	12.5	96.4%
48.0	3.4	12.0	13.0	96.3%
48.0	3.5	12.0	13.5	96.3%
48.0	3.6	12.0	14.0	96.3%
48.0	3.8	12.0	14.5	96.2%
48.0	3.9	12.0	15.0	96.2%
48.0	4.0	12.0	15.5	96.1%
48.0	4.2	12.0	16.0	96.1%
48.0	4.3	12.0	16.5	96.0%
48.0	4.4	12.0	17.0	96.0%

**Table 2-2. Efficiency Data for 48V Input Voltage (continued)**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
48.0	4.6	12.0	17.5	95.9%
48.0	4.7	12.0	18.0	95.8%
48.0	4.8	12.0	18.5	95.8%
48.0	5.0	12.0	19.0	95.7%
48.0	5.1	12.0	19.5	95.6%
48.0	5.2	12.0	20.0	95.5%
48.0	5.4	12.0	20.5	95.4%
48.0	5.5	12.0	21.0	95.3%
48.0	5.7	12.0	21.5	95.2%
48.0	5.8	12.0	22.0	95.1%
48.0	5.9	12.0	22.5	94.9%
48.0	6.1	12.0	23.0	94.8%
48.0	6.2	12.0	23.5	94.6%
48.0	6.4	12.0	24.0	94.4%

**2.2.3 60V Input Voltage****Table 2-3. Efficiency Data for 60V Input Voltage**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
60.0	0.0	12.0	0.0	-0.5%
60.0	0.1	12.0	0.5	74.7%
60.0	0.2	12.0	1.0	85.4%
60.0	0.3	12.0	1.5	89.6%
60.0	0.4	12.0	2.0	91.5%
60.0	0.5	12.0	2.5	92.4%
60.0	0.6	12.0	3.0	92.8%
60.0	0.8	12.0	3.5	93.3%
60.0	0.9	12.0	4.0	93.8%
60.0	1.0	12.0	4.5	94.2%
60.0	1.1	12.0	5.0	94.6%
60.0	1.2	12.0	5.5	94.9%
60.0	1.3	12.0	6.0	95.1%
60.0	1.4	12.0	6.5	95.2%
60.0	1.5	12.0	7.0	95.4%
60.0	1.6	12.0	7.5	95.5%
60.0	1.7	12.0	8.0	95.6%
60.0	1.8	12.0	8.5	95.7%
60.0	1.9	12.0	9.0	95.7%
60.0	2.0	12.0	9.5	95.8%
60.0	2.1	12.0	10.0	95.8%
60.0	2.2	12.0	10.5	95.8%
60.0	2.3	12.0	11.0	95.8%
60.0	2.4	12.0	11.5	95.8%
60.0	2.5	12.0	12.0	95.8%
60.0	2.6	12.0	12.5	95.8%
60.0	2.7	12.0	13.0	95.8%

**Table 2-3. Efficiency Data for 60V Input Voltage (continued)**

Input Voltage (V)	Input Current (A)	Output Voltage (V)	Output Current (A)	Efficiency (%)
60.0	2.8	12.0	13.5	95.8%
60.0	2.9	12.0	14.0	95.7%
60.0	3.0	12.0	14.5	95.7%
60.0	3.1	12.0	15.0	95.6%
60.0	3.2	12.0	15.5	95.6%
60.0	3.4	12.0	16.0	95.6%
60.0	3.5	12.0	16.5	95.5%
60.0	3.6	12.0	17.0	95.4%
60.0	3.7	12.0	17.5	95.4%
60.0	3.8	12.0	18.0	95.3%
60.0	3.9	12.0	18.5	95.2%
60.0	4.0	12.0	19.0	95.1%
60.0	4.1	12.0	19.5	95.1%
60.0	4.2	12.0	20.0	95.0%
60.0	4.3	12.0	20.5	94.8%
60.0	4.4	12.0	21.0	94.7%
60.0	4.5	12.0	21.5	94.7%
60.0	4.7	12.0	22.0	94.5%
60.0	4.8	12.0	22.5	94.3%
60.0	4.9	12.0	23.0	94.2%
60.0	5.0	12.0	23.5	93.9%
60.0	5.1	12.0	24.0	93.8%

## 2.3 Thermal Images

### 2.3.1 Thermal Images at 48V<sub>IN</sub>, 12V<sub>OUT</sub>, 10A, No Heatsink

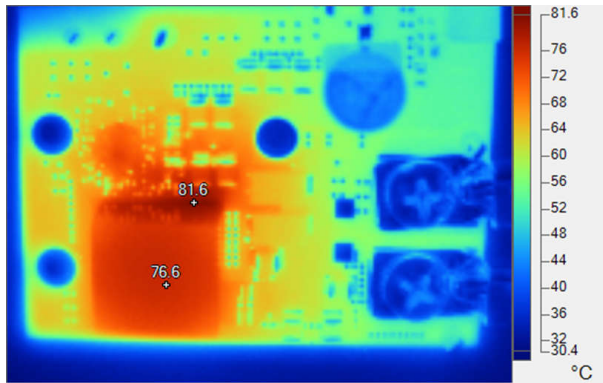


Figure 2-2. Top Side: Inductor (76°C), GaN IC Thermal Pad Vias (81°C)

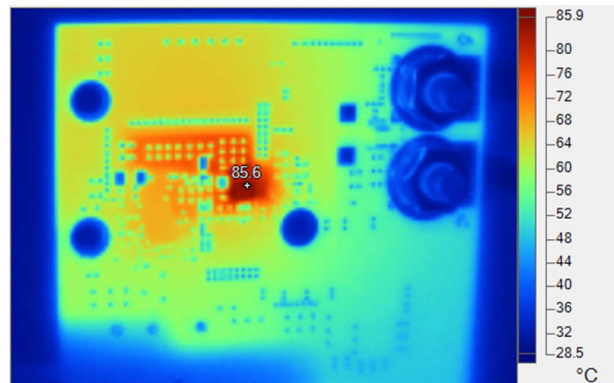


Figure 2-3. Bottom Side: GaN IC (85°C)

### 2.3.2 Thermal Images at 48V<sub>IN</sub>, 12V<sub>OUT</sub>, 20A, RS-PRO 750-0951 Heatsink

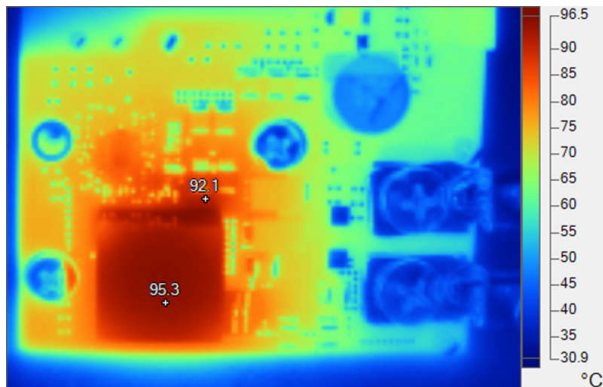


Figure 2-4. Top Side: Inductor (95°C), GaN IC Thermal Pad Vias (92°C)

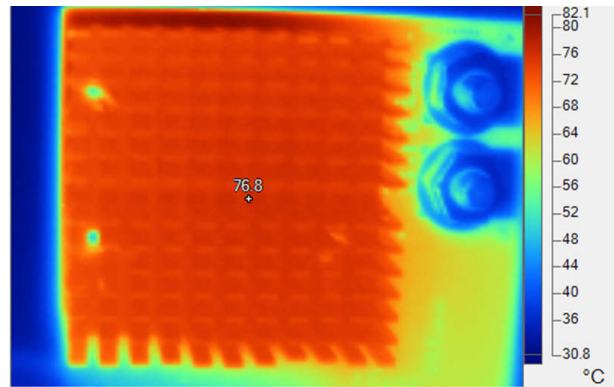


Figure 2-5. Bottom Side: Heatsink (76°C)



## 2.4 Bode Plots

### 2.4.1 30V Input Voltage

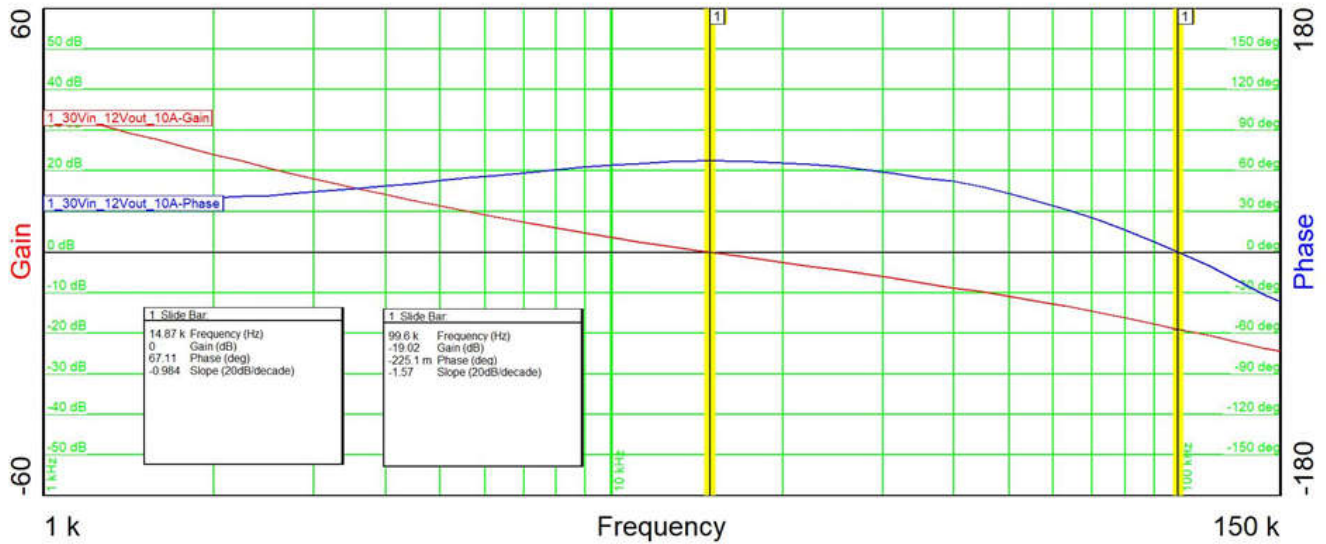


Figure 2-6. 30V<sub>IN</sub>, 10A Load Current: f<sub>co</sub> 14.87kHz, 67 ° Phase Margin

### 2.4.2 48V Input Voltage

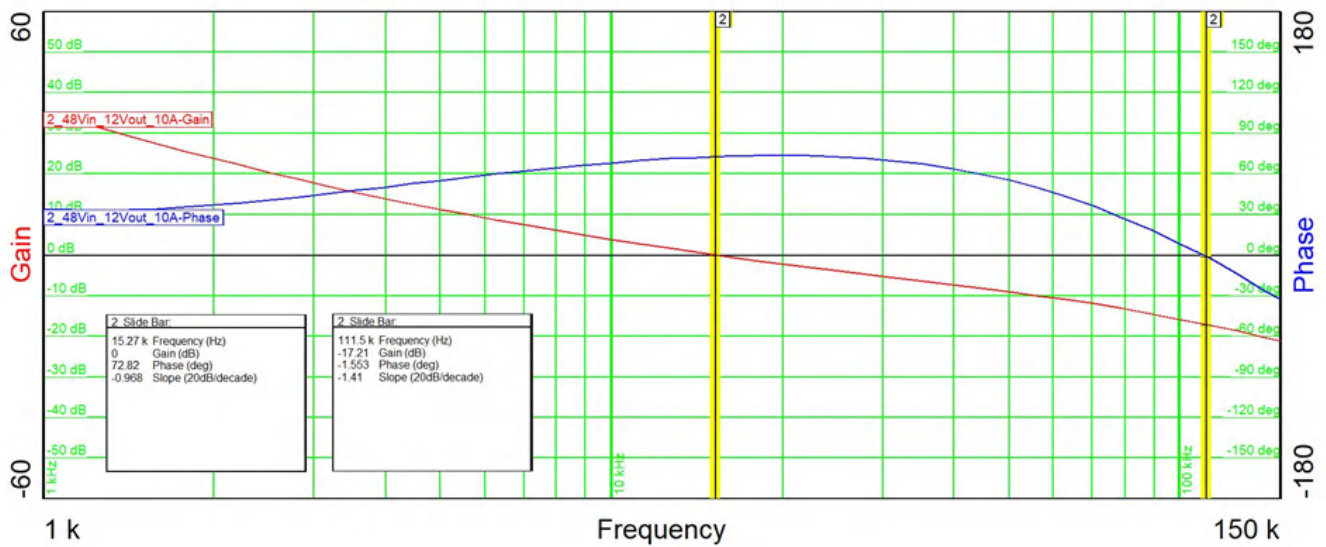


Figure 2-7. 48V<sub>in</sub>, 10A Load Current: f<sub>co</sub> 15.27kHz, 72 Deg Phase Margin

### 2.4.3 60V Input Voltage

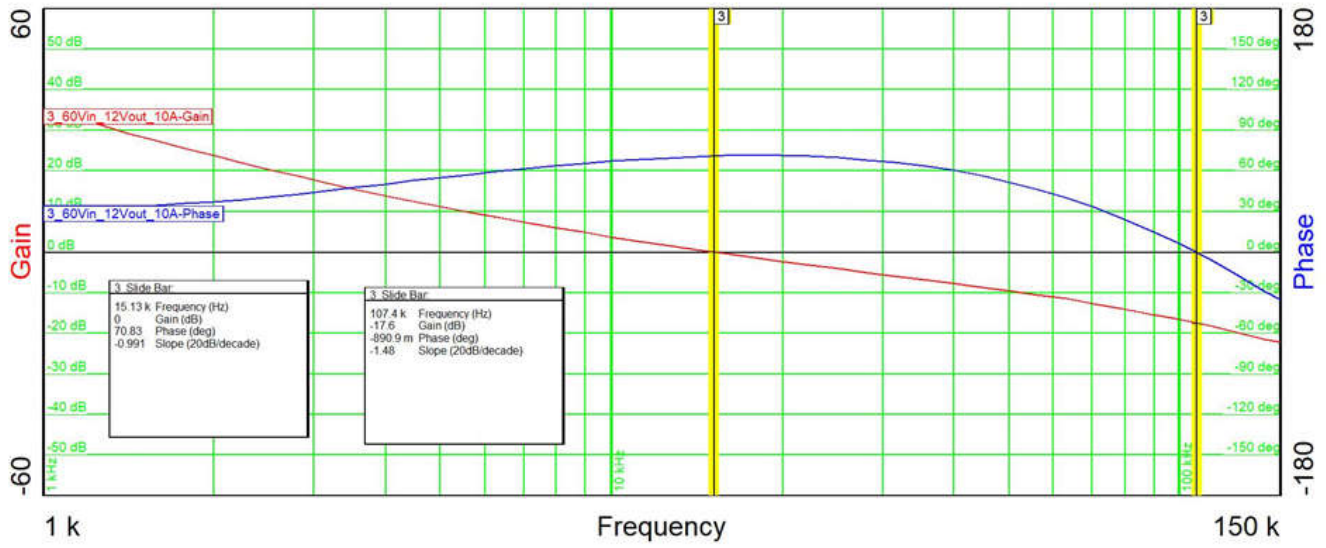


Figure 2-8. 60V<sub>IN</sub>, 10A Load Current: f<sub>co</sub> 15.13kHz, 70° Phase Margin

### 3 Waveforms

#### 3.1 Switching

##### 3.1.1 48V Input Voltage

##### 3.1.1.1 0A Output Current

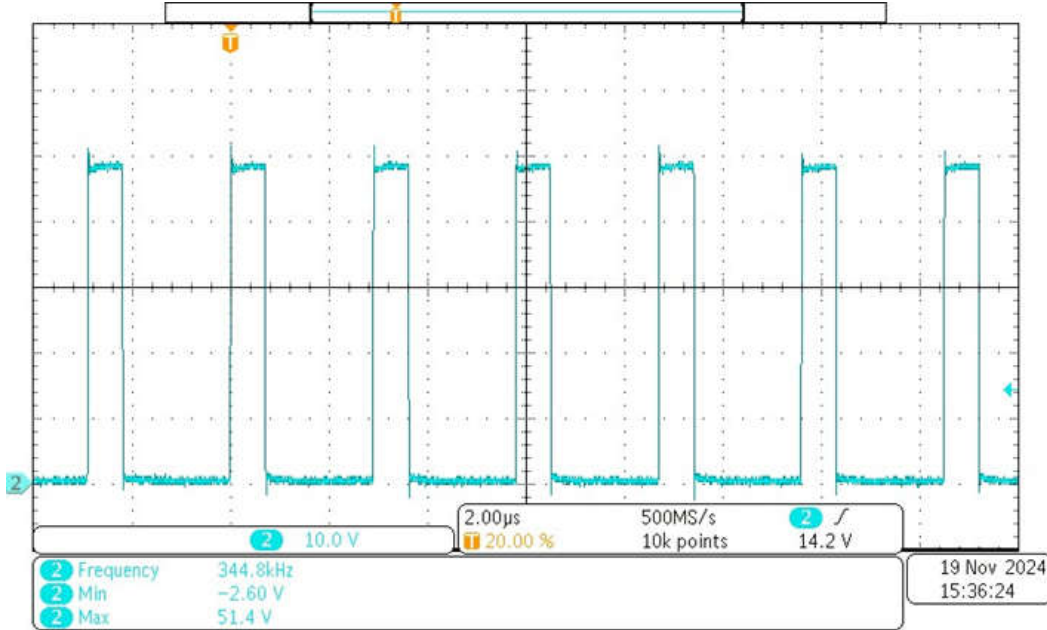


Figure 3-1. CH1: Switching Node at 48V<sub>IN</sub>, 12V<sub>OUT</sub> and 0A Load Current (Scale: 10V/div, 2µs/div)

##### 3.1.1.2 20A Output Current

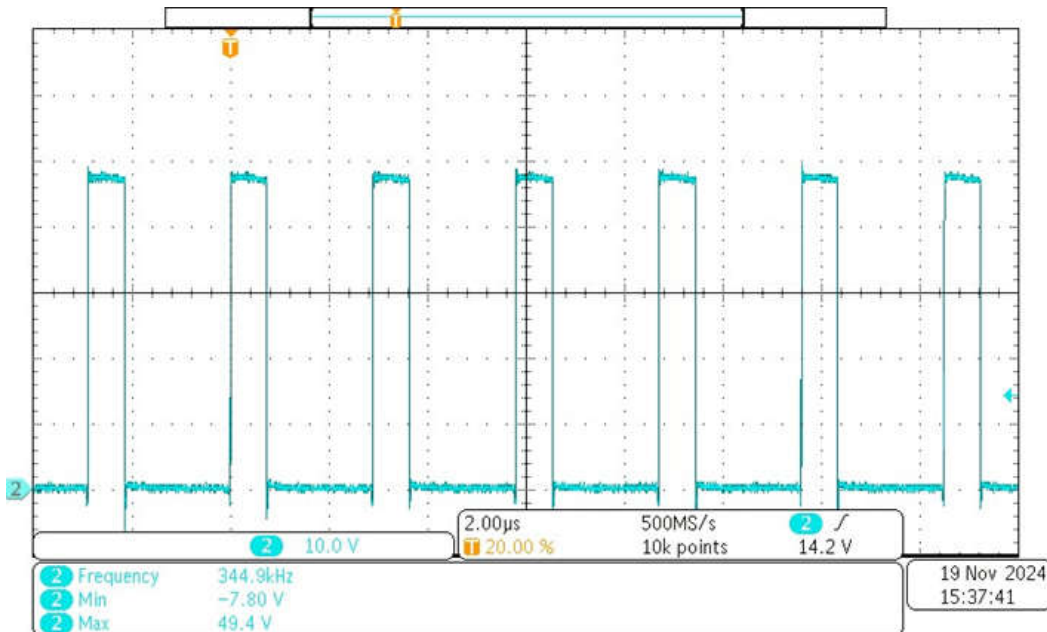


Figure 3-2. CH1: Switching Node at 48V<sub>IN</sub>, 12V<sub>OUT</sub> and 20A Load Current (scale: 10V/div, 2µs/div)

### 3.1.2 60V Input Voltage

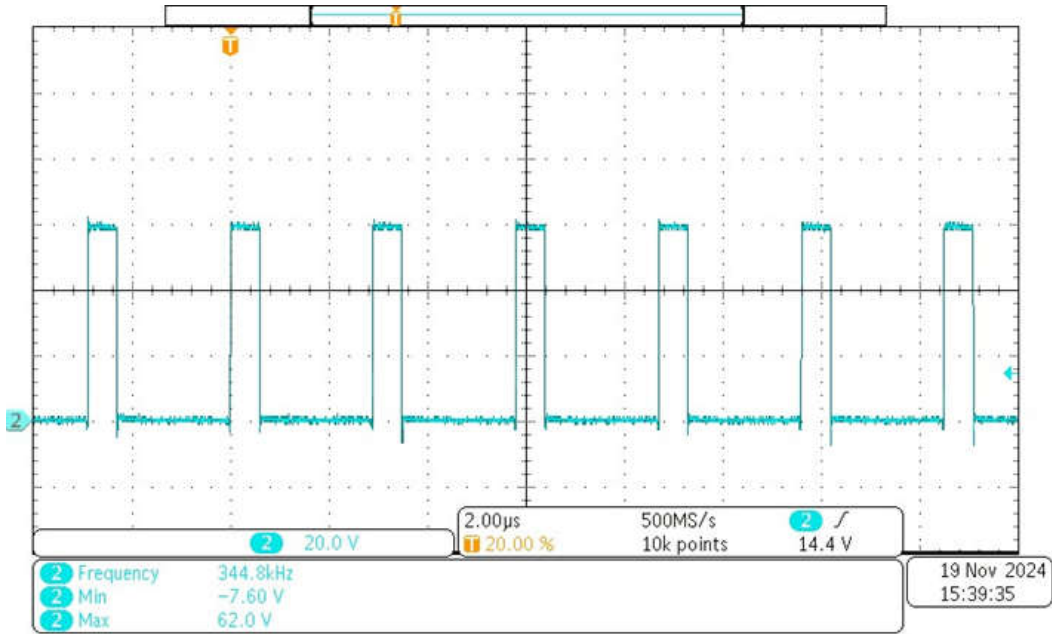


Figure 3-3. CH1: Switching Node at 60V<sub>IN</sub>, 12V<sub>OUT</sub> and 20A Load Current [Scale: 20V/div, 2μs/div]

### 3.1.3 30V Input Voltage

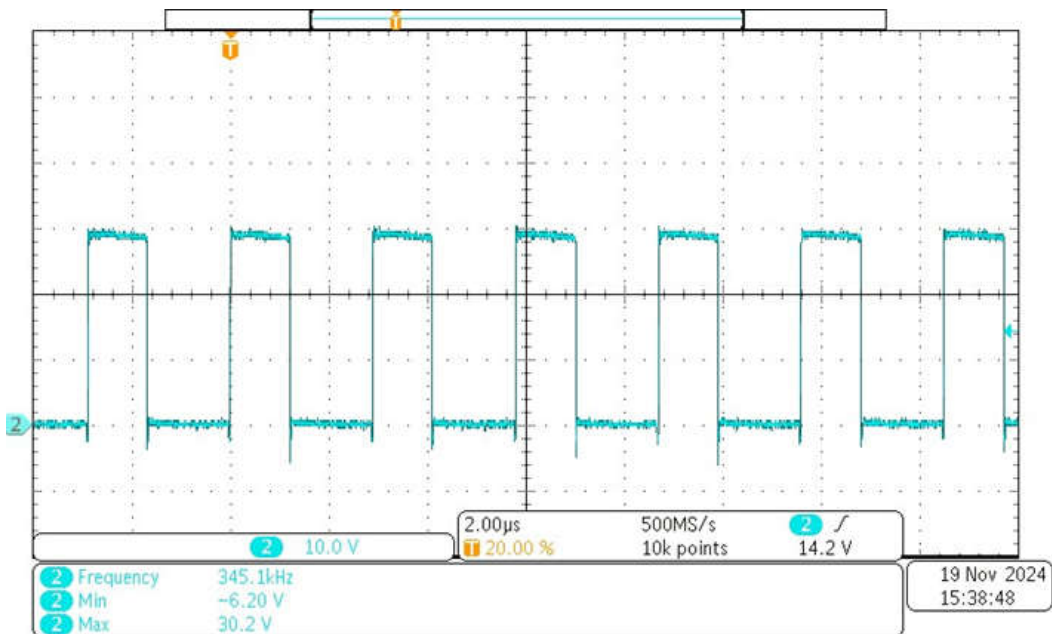


Figure 3-4. CH1: Switching Node at 30V<sub>IN</sub>, 12V<sub>OUT</sub> and 20A Load Current [Scale: 10V/div, 2μs/div]

### 3.2 Output Voltage Ripple

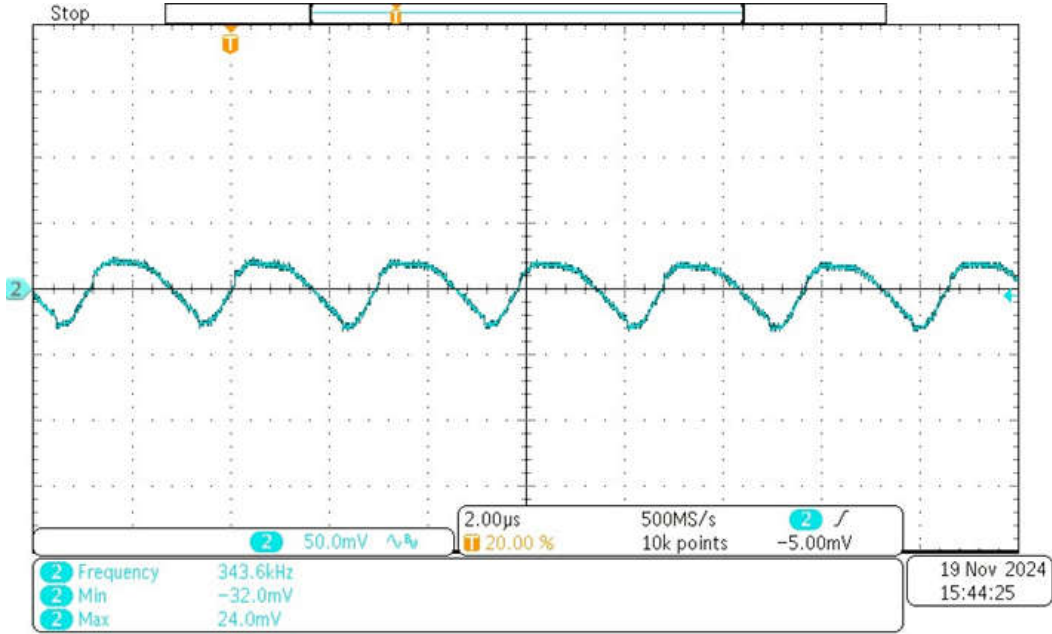


Figure 3-5. CH1: AC-Coupled Output Voltage at 48V<sub>IN</sub>, 12V<sub>OUT</sub>, 20A Load bw Limited (20MHz) [scale: 50mV/div, 2µs/div]

### 3.3 Input Voltage Ripple


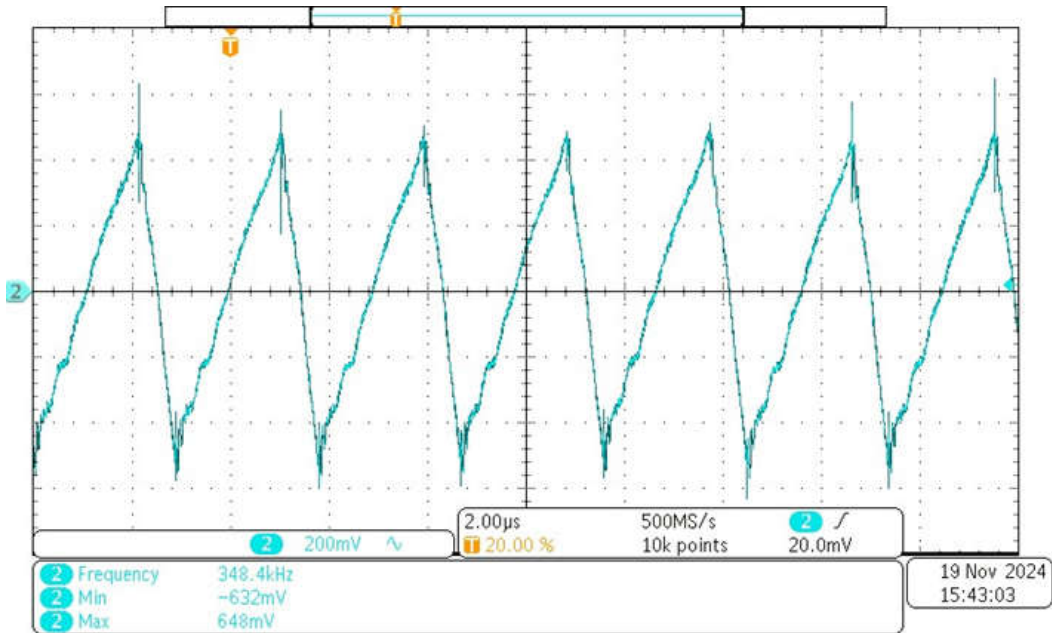


Figure 3-6. CH1: AC-Coupled Input Voltage at 48V<sub>IN</sub>, 12V<sub>OUT</sub>, 20A Load bw Limited (20MHz) [scale: 200mV/div, 2µs/div]

### 3.4 Load Transients

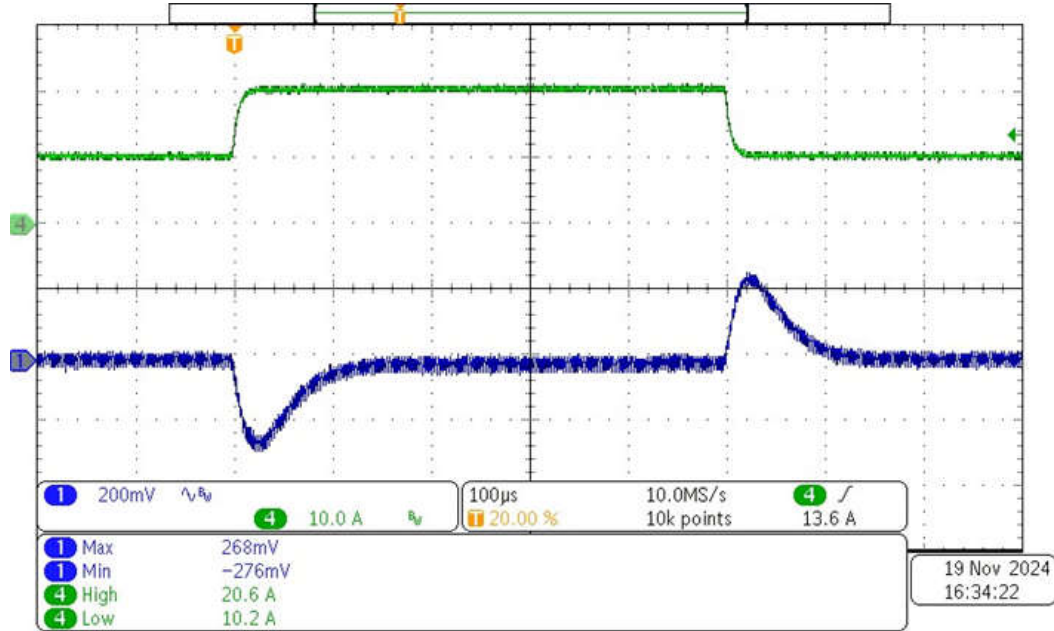

**Figure 3-7. Load Transient 10A to 20A**

- CH4: Load transient from 10A to 20A (scale: 10A/div, 100µs/div)
- CH1: AC-coupled output voltage at 48V<sub>in</sub>, bw limited (20MHz) (scale: 200mV/div, 100µs/div)

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024, Texas Instruments Incorporated