

**Test Data
For PMP10503
6/30/2014**



Table of Contents

1. Design Specifications	3
2. Circuit Description.....	3
3. PMP10503 Board Photos	4
4. Thermal Data.....	6
5. Efficiency	8
5.1 Efficiency Chart	8
5.2 Efficiency Data.....	8
6 Waveforms.....	10
6.1 Load Transient Response	10
6.2 Startup	14
6.3 Output Voltage Ripple and Switch Node Voltage	22

1. Design Specifications


Vin Minimum	7VDC
Vin Maximum	36VDC
Vin Nominal	14VDC
Vout	48VDC
Iout	1A Max.
Switching Frequency	≈ 135KHz

2. Circuit Description


PMP10503 is a Single-Phase Synchronous Boost Converter using the LM5122 controller IC. The design accepts an input voltage of 7Vin to 36Vin (14Vin Nominal) and provides an output of 48Vout capable of supplying 1A of continuous current to the load. The design was built on the PMP7896 RevB PCB, which was modified to the PMP10503 design configuration and requirements.

3. PMP10503 Board Photos

Board Dimensions: 3.96" x 3.85"

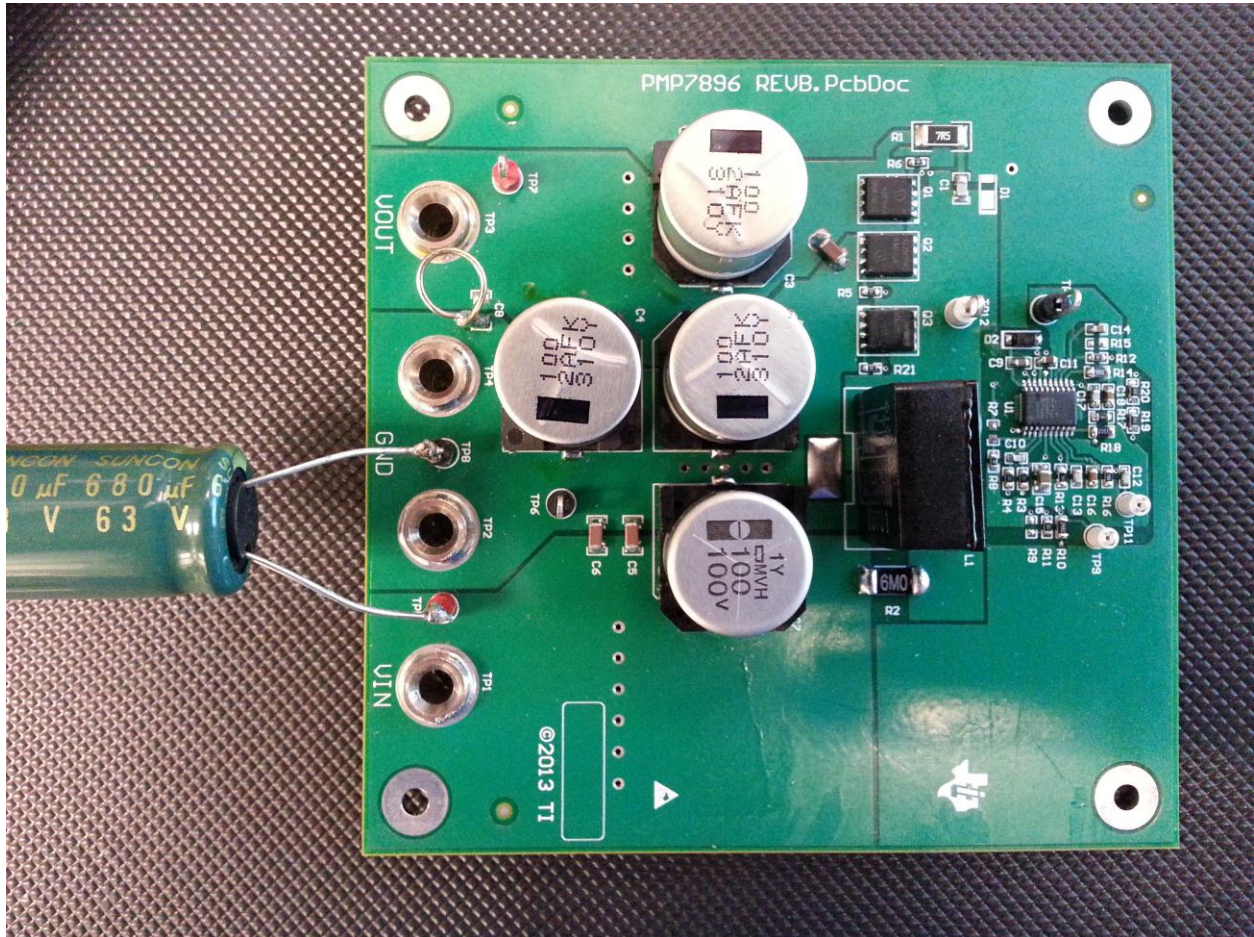


Board Photo (Top)

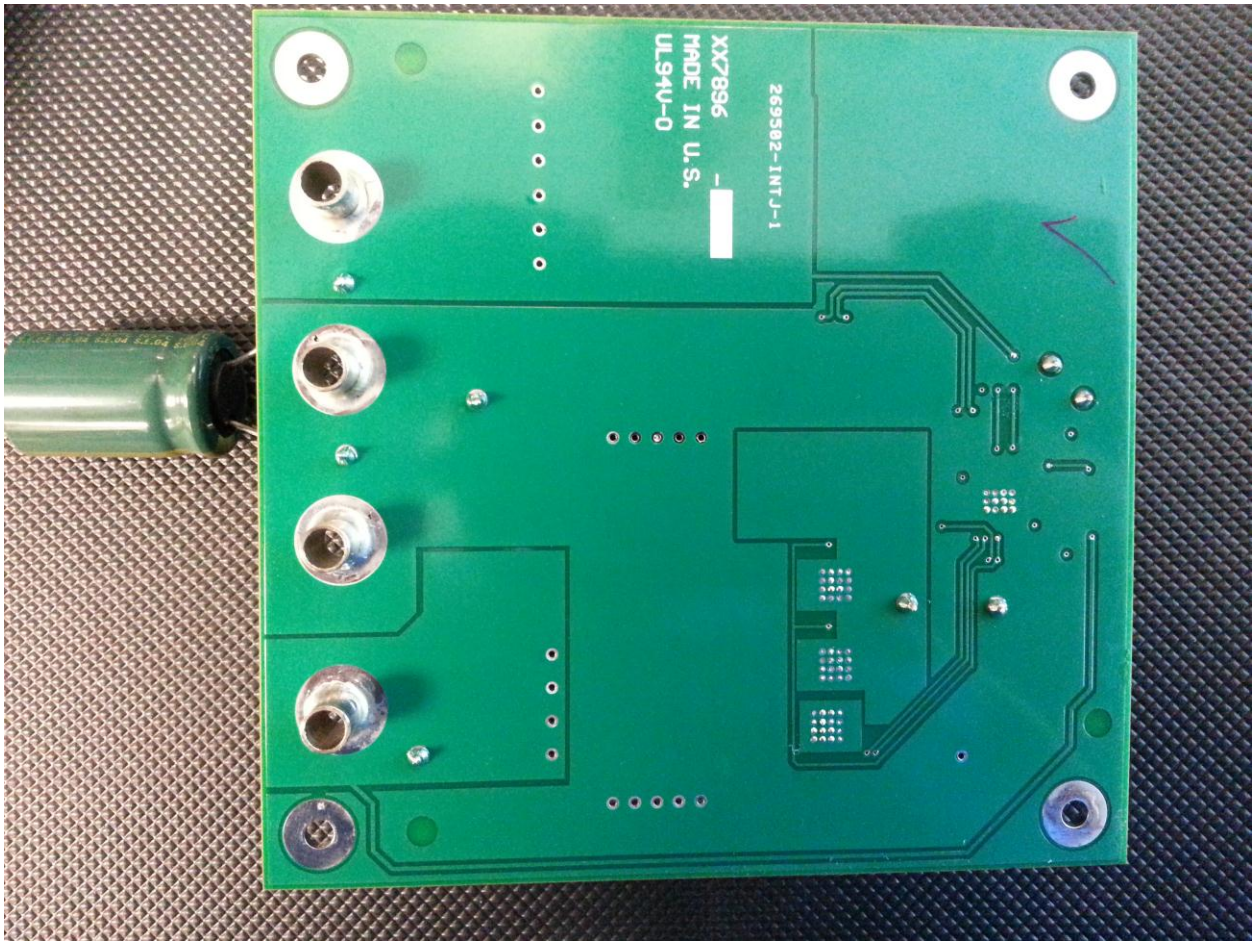


Board Photo (Bottom)

4. Thermal Data

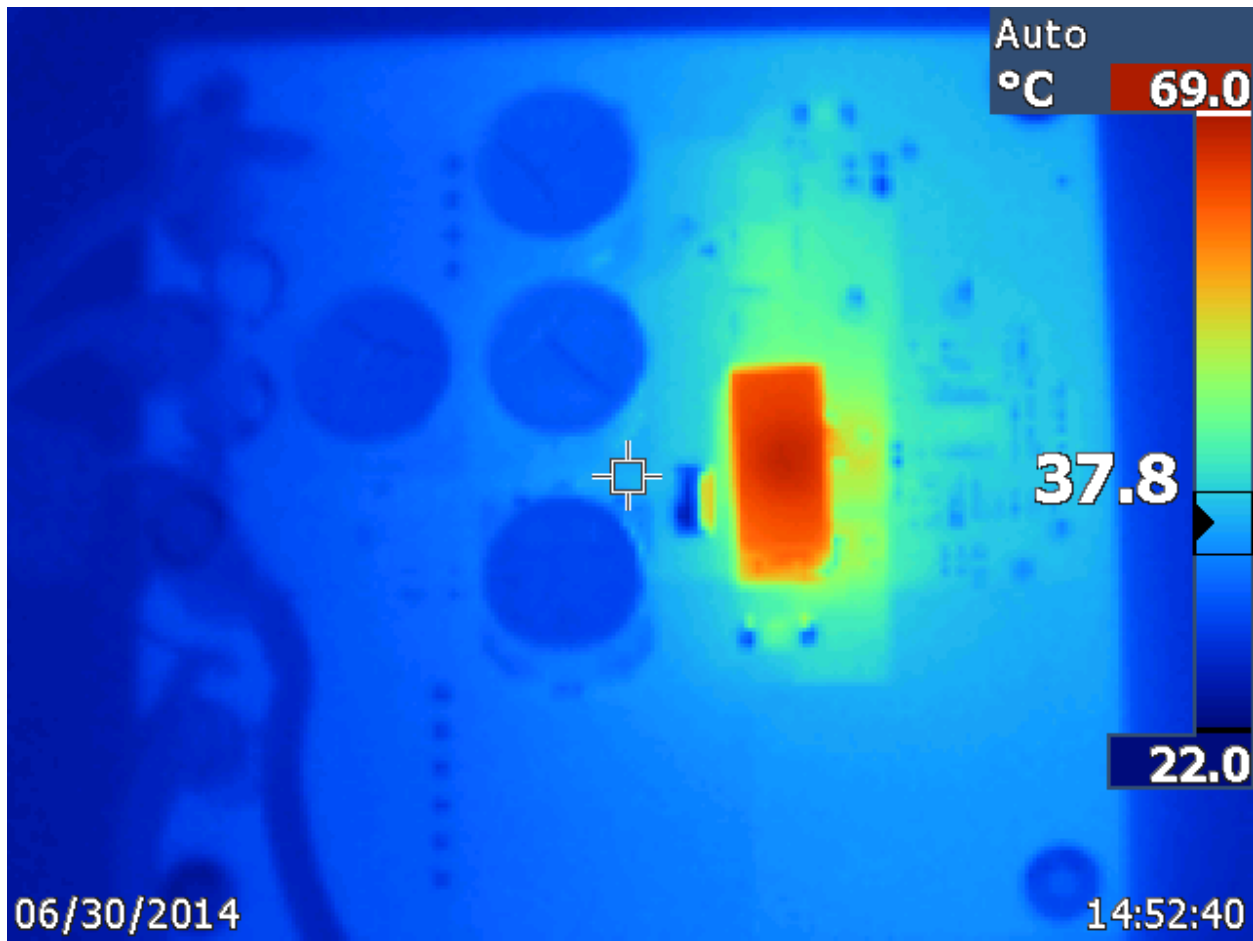


IR thermal image taken at steady state with 14Vin and 1A load (no airflow)

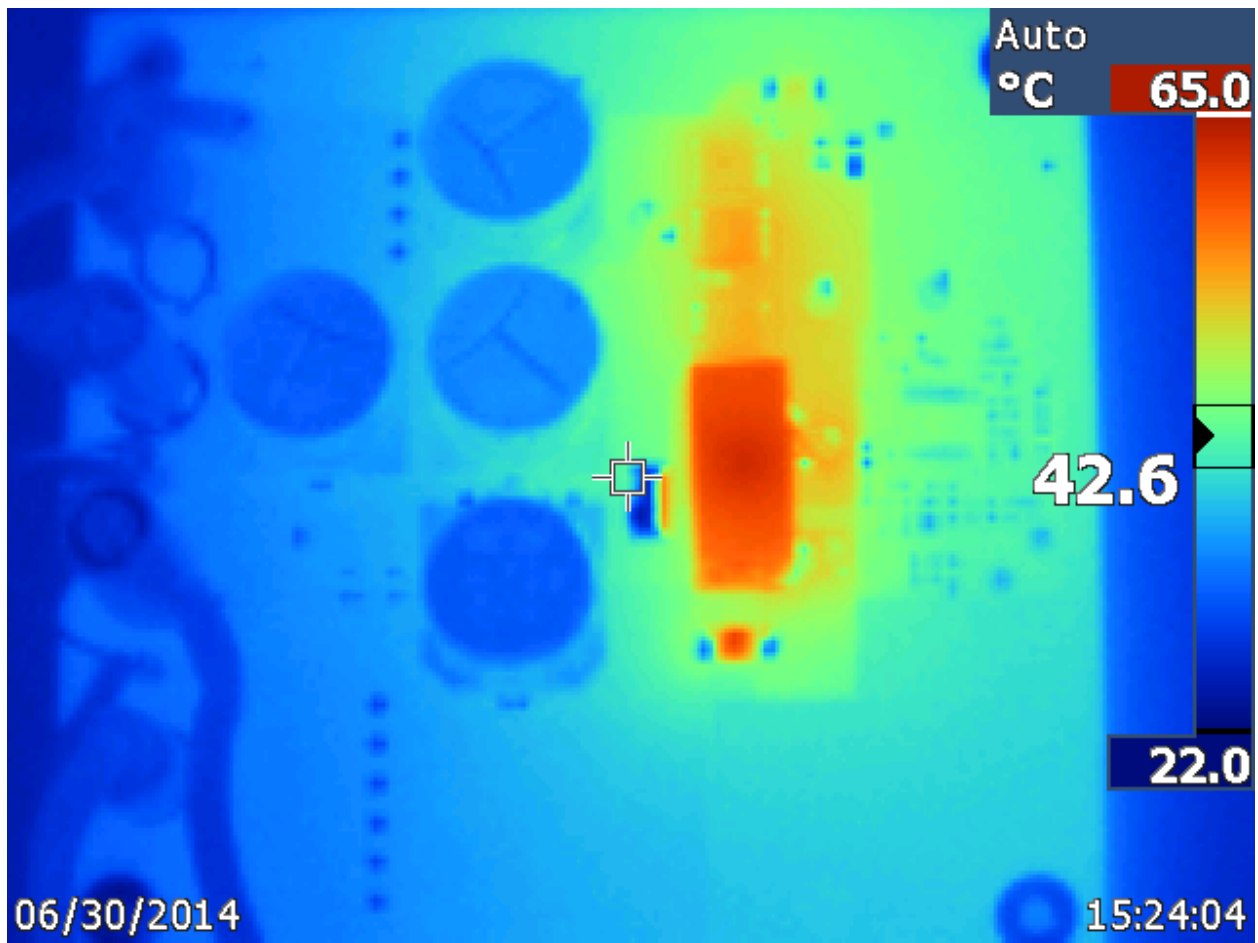

IR thermal image taken at steady state with 7Vin and 1A load (no airflow)

5. Efficiency

5.1 Efficiency Chart

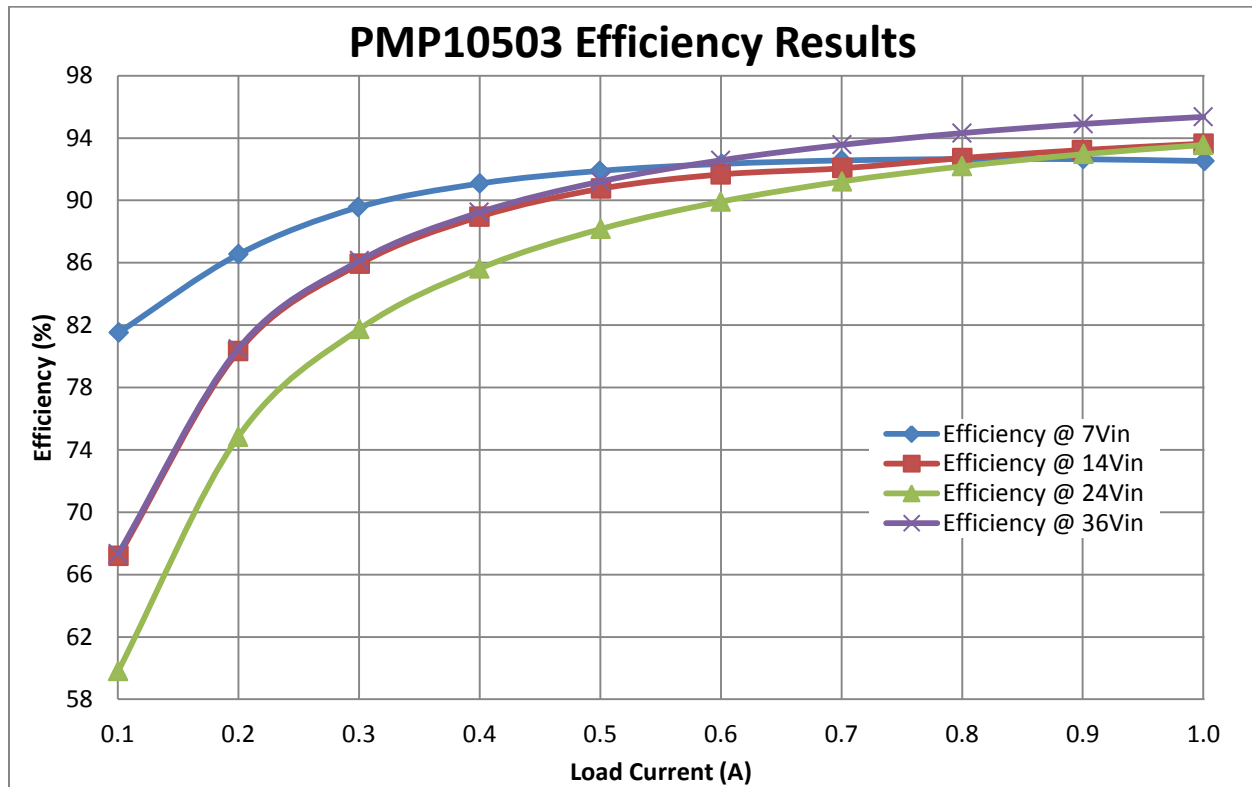

5.2 Efficiency Data

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Efficiency (%)
7	0.8533	48.278	0.10087	5.9731	4.869802	81.5
7	1.595	48.277	0.20015	11.165	9.662642	86.5
7	2.3058	48.276	0.29944	16.1406	14.45577	89.6
7	3.0302	48.276	0.4002	21.2114	19.32006	91.1
7	3.7508	48.275	0.4998	26.2556	24.12785	91.9
7	4.486	48.275	0.60068	31.402	28.99783	92.3
7	5.2163	48.273	0.70017	36.5141	33.79931	92.6
7	5.9528	48.273	0.79978	41.6696	38.60778	92.7
7	6.7029	48.273	0.90047	46.9203	43.46839	92.6
7	7.4606	48.272	1.001	52.2242	48.32027	92.5


Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Efficiency (%)
14	0.5165	48.276	0.10065	7.231	4.858979	67.2
14	0.8585	48.276	0.19998	12.019	9.654234	80.3
14	1.2063	48.277	0.3006	16.8882	14.51207	85.9
14	1.5502	48.276	0.39991	21.7028	19.30606	89.0
14	1.9023	48.276	0.50066	26.6322	24.16986	90.8
14	2.2574	48.276	0.60009	31.6036	28.96994	91.7
14	2.6246	48.275	0.70074	36.7444	33.82822	92.1
14	2.9759	48.275	0.80018	41.6626	38.62869	92.7
14	3.3272	48.275	0.8996	46.5808	43.42819	93.2
14	3.6837	48.274	1.0004	51.5718	48.29331	93.6

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Efficiency (%)
24	0.3376	48.276	0.10038	8.1024	4.845945	59.8
24	0.5371	48.276	0.19982	12.8904	9.64651	74.8
24	0.7394	48.276	0.30052	17.7456	14.5079	81.8
24	0.9392	48.276	0.39982	22.5408	19.30171	85.6
24	1.142	48.276	0.50059	27.408	24.16648	88.2
24	1.3421	48.276	0.59998	32.2104	28.96463	89.9
24	1.5449	48.276	0.7006	37.0776	33.82217	91.2
24	1.7457	48.276	0.80007	41.8968	38.62418	92.2
24	1.9491	48.276	0.90085	46.7784	43.48943	93.0
24	2.1501	48.276	1	51.6024	48.276	93.6


Vin (V)	Iin (A)	Vout (V)	Iout (A)	Pin (W)	Pout (W)	Efficiency (%)
36	0.1999	48.277	0.10037	7.1964	4.845562	67.3
36	0.3329	48.277	0.19978	11.9844	9.644779	80.5
36	0.4678	48.278	0.30045	16.8408	14.50513	86.1
36	0.6008	48.278	0.39976	21.6288	19.29961	89.2
36	0.7358	48.278	0.5005	26.4888	24.16314	91.2
36	0.869	48.278	0.59987	31.284	28.96052	92.6
36	1.004	48.278	0.7005	36.144	33.81874	93.6
36	1.1374	48.279	0.79993	40.9464	38.61982	94.3
36	1.2726	48.278	0.90065	45.8136	43.48158	94.9
36	1.4063	48.278	1	50.6268	48.278	95.4

6 Waveforms


6.1 Load Transient Response

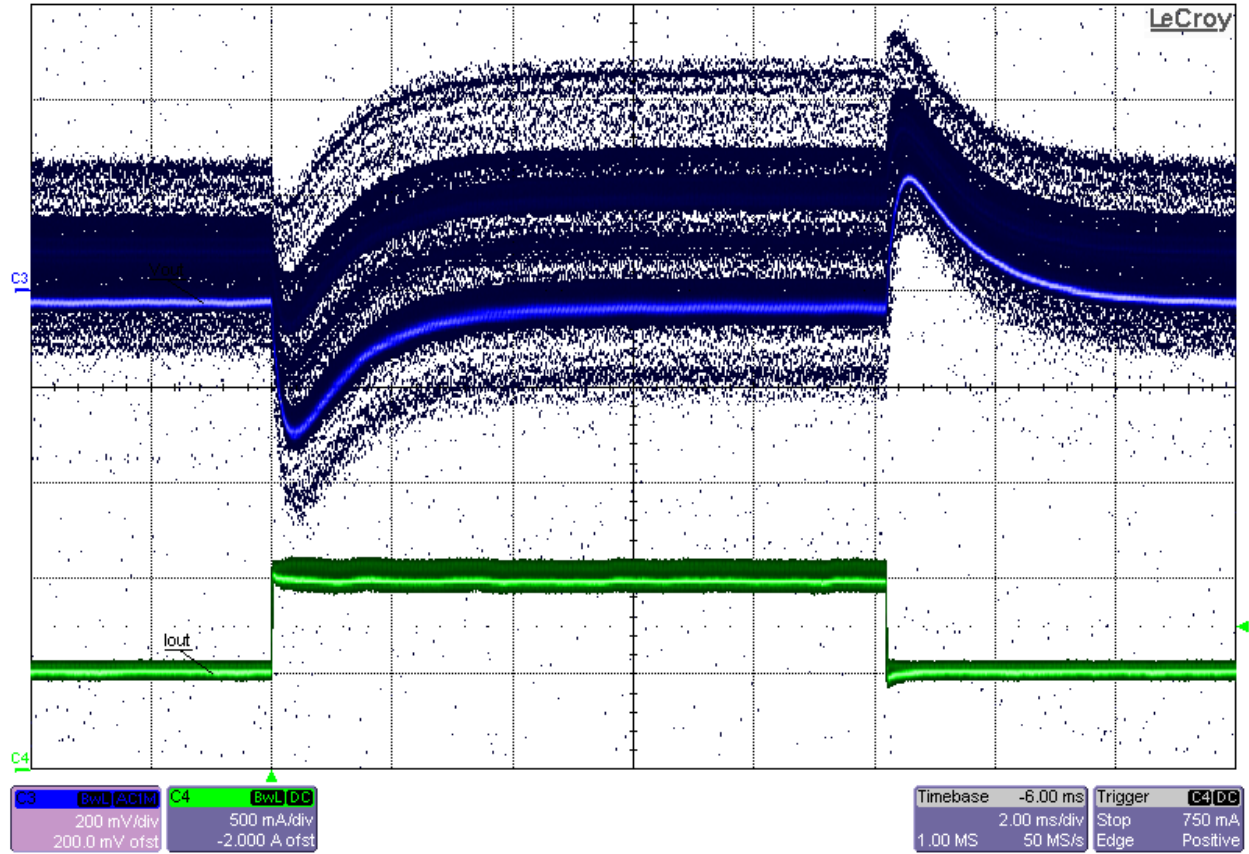


Load Transient Response at 7Vin and 50%-to-100% (0.5A-to-1A) Load Step

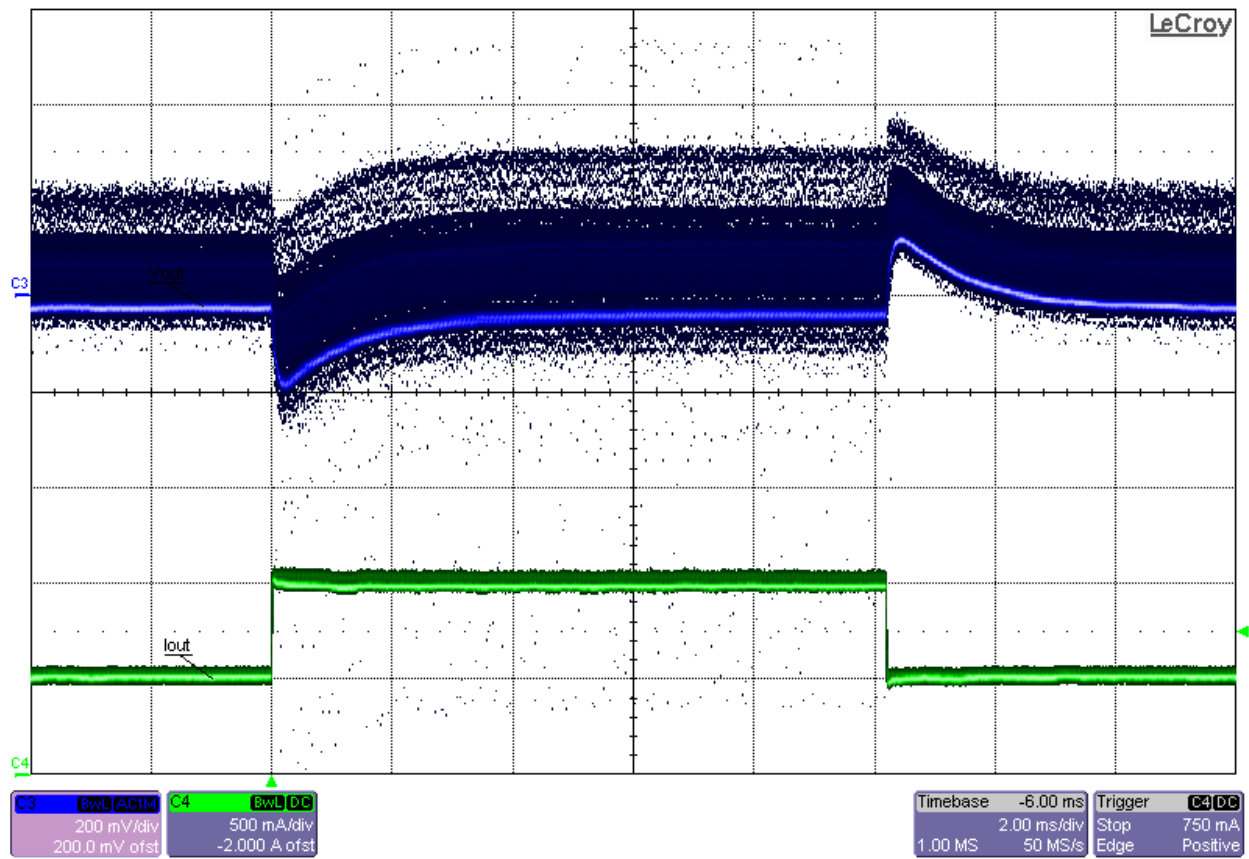

Load Transient Response at 14Vin and 50%-to-100% (0.5A-to-1A) Load Step

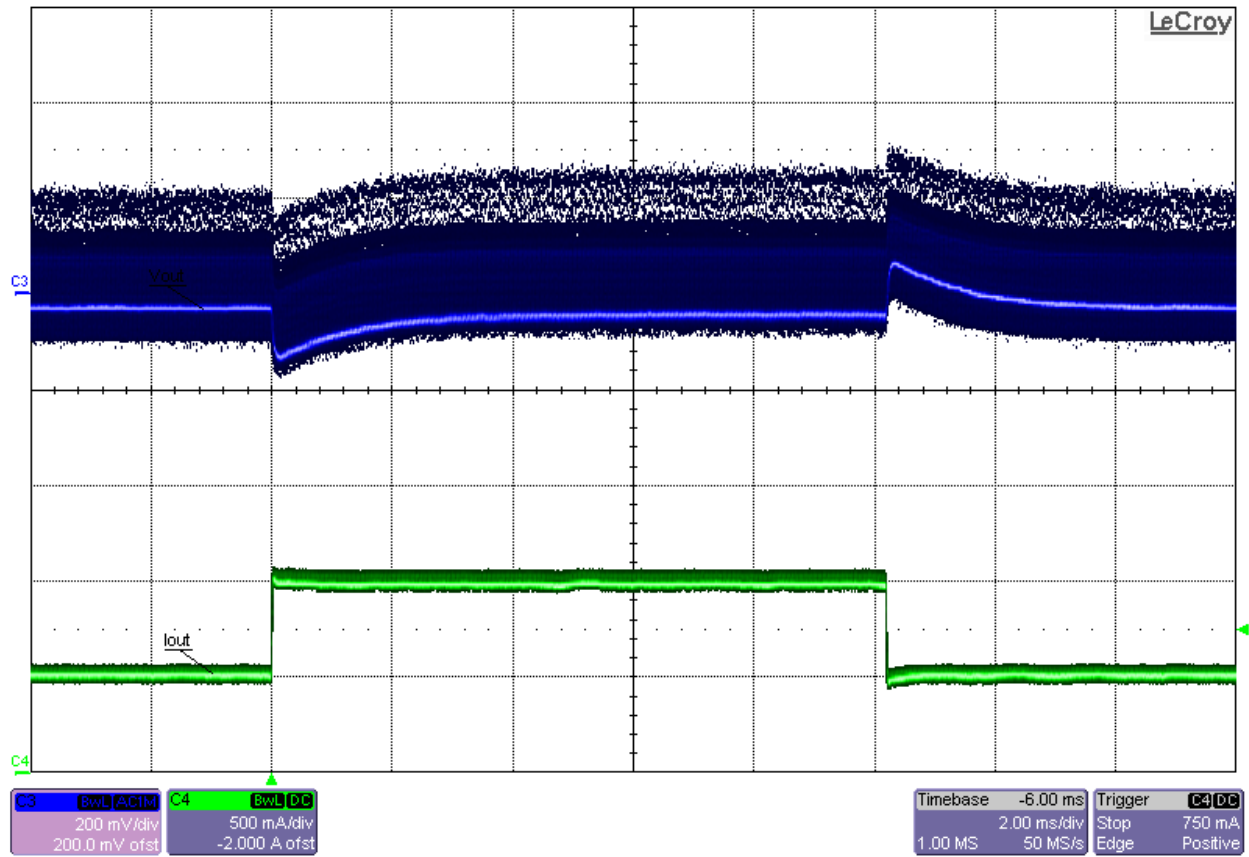


Load Transient Response at 24Vin and 50%-to-100% (0.5A-to-1A) Load Step

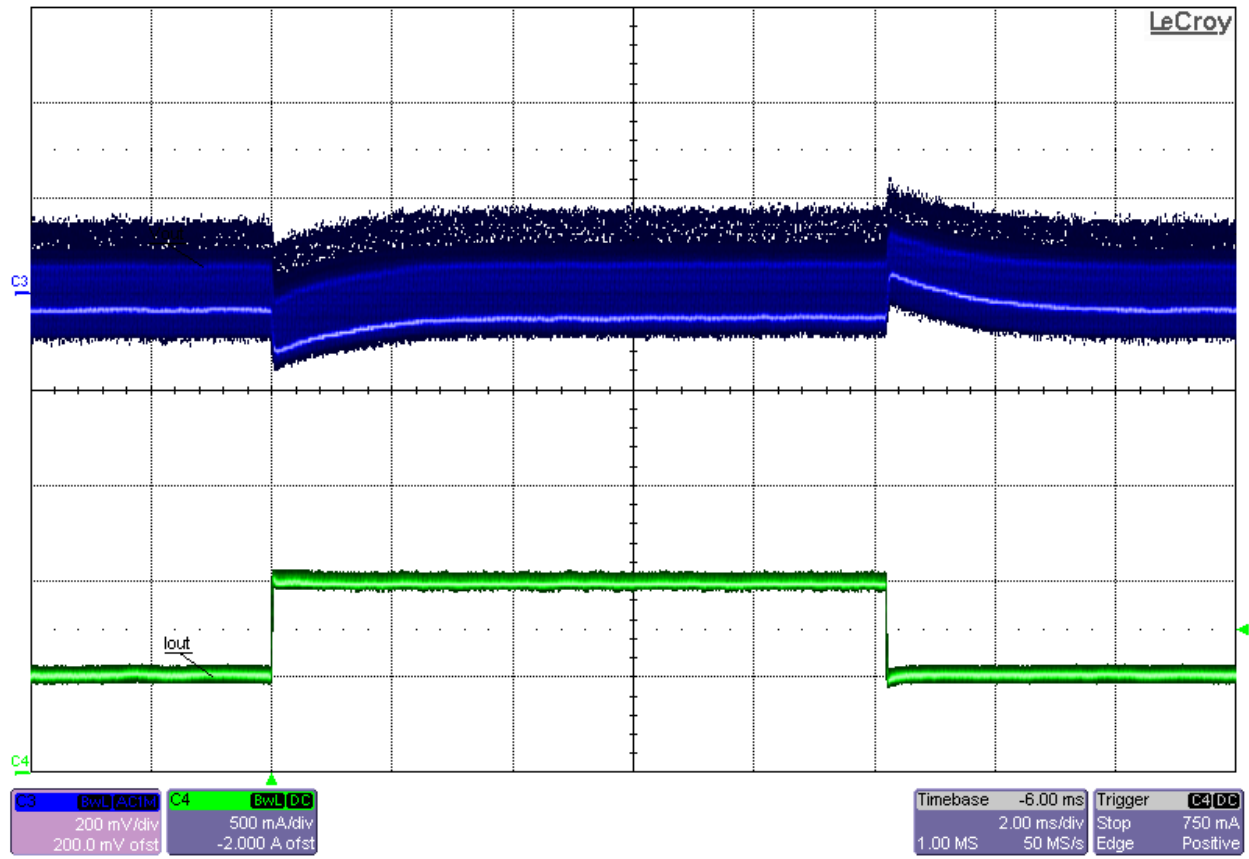


Load Transient Response at 36Vin and 50%-to-100% (0.5A-to-1A) Load Step


6.2 Startup

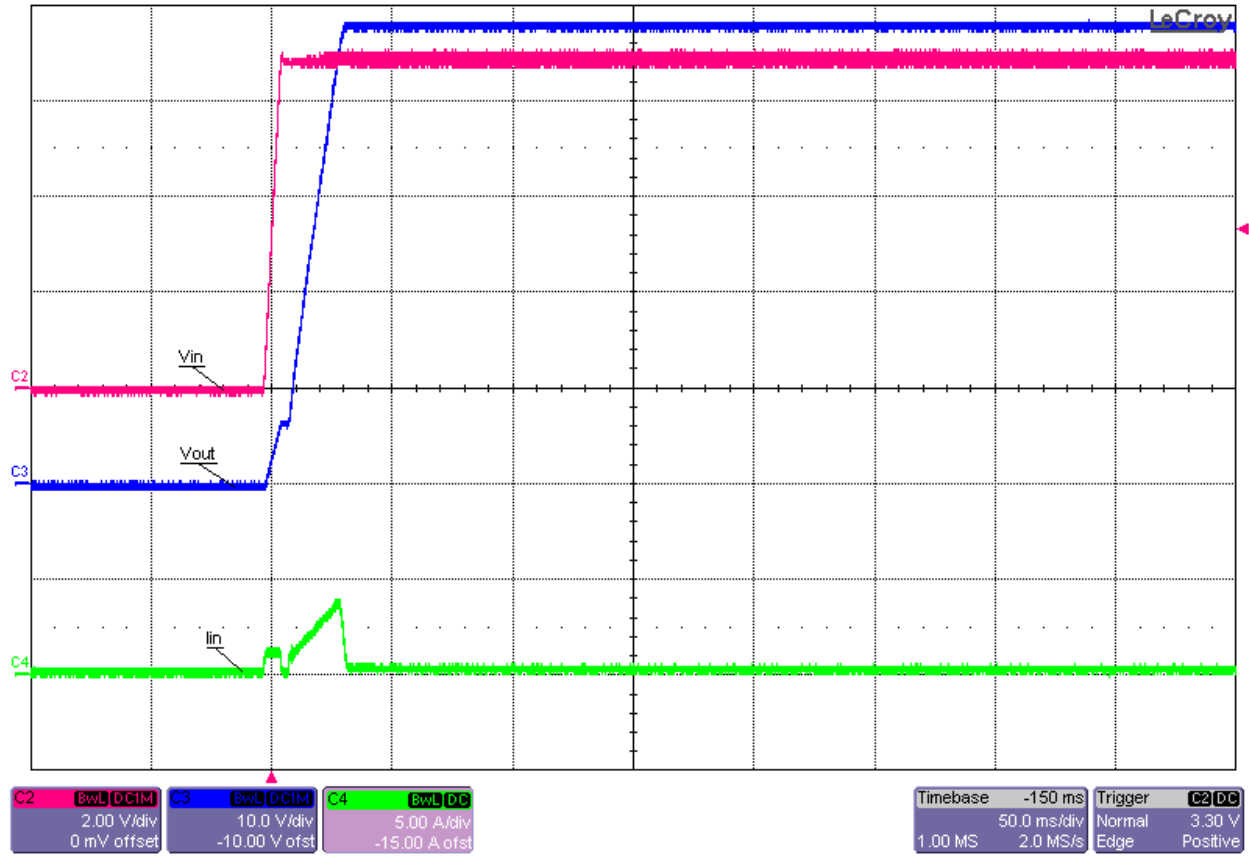


Startup into No Load at 7Vin

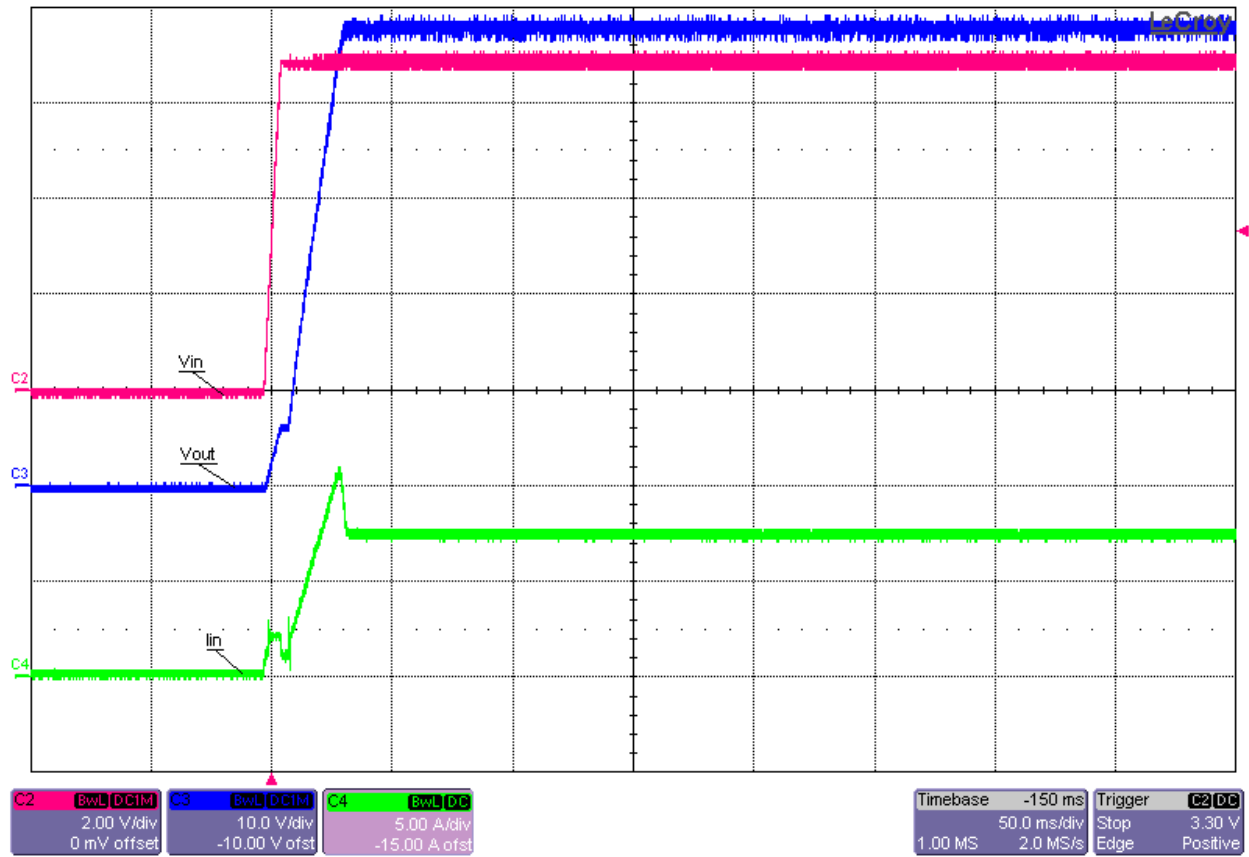


Startup into 1A Load at 7Vin

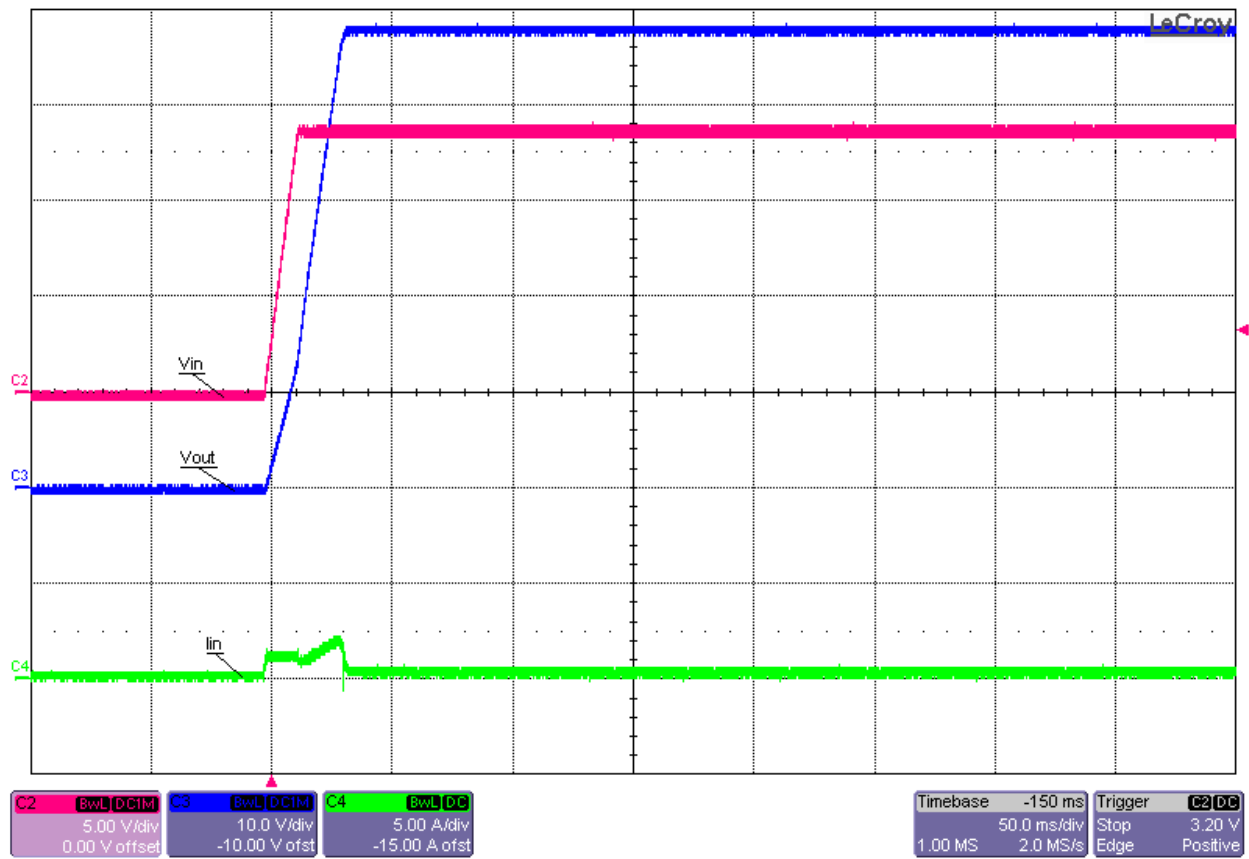


Startup into No Load at 14Vin

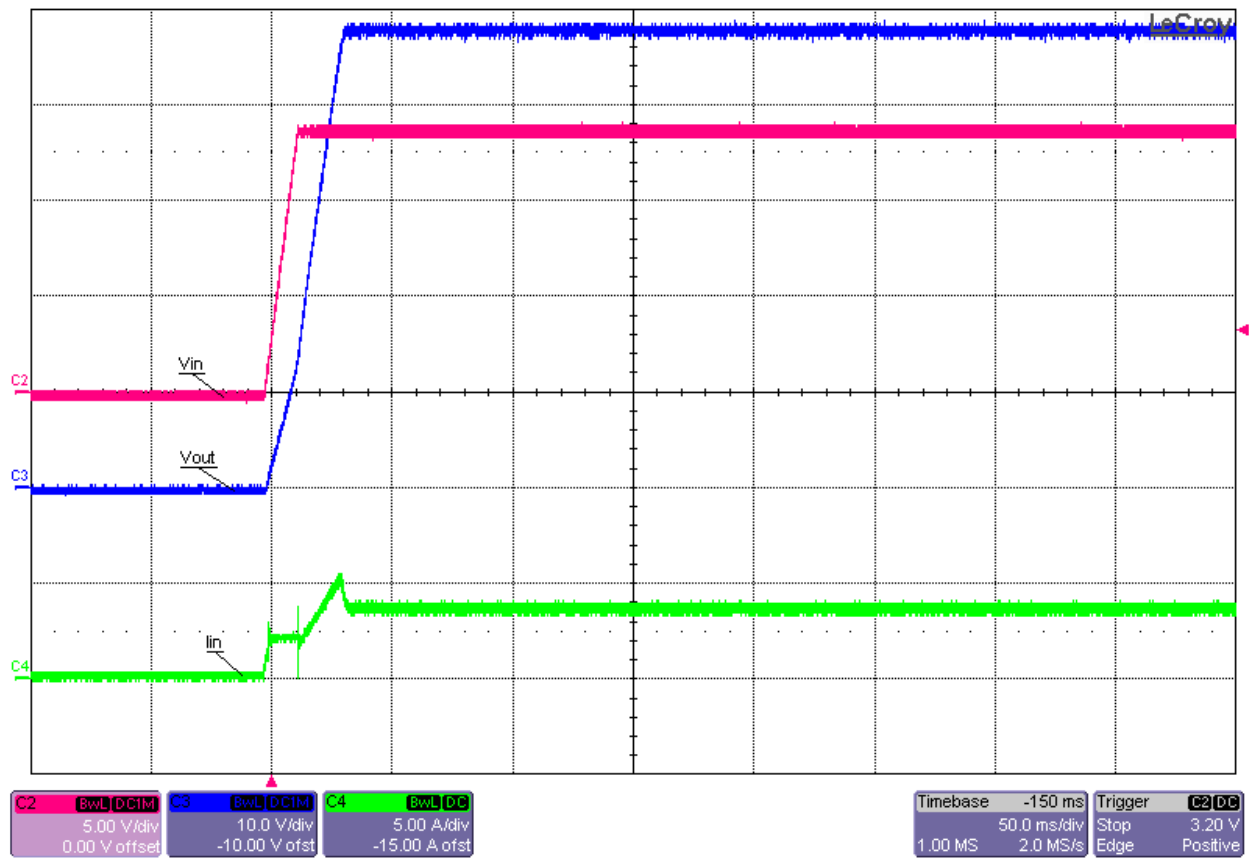


Startup into 1A Load at 14Vin

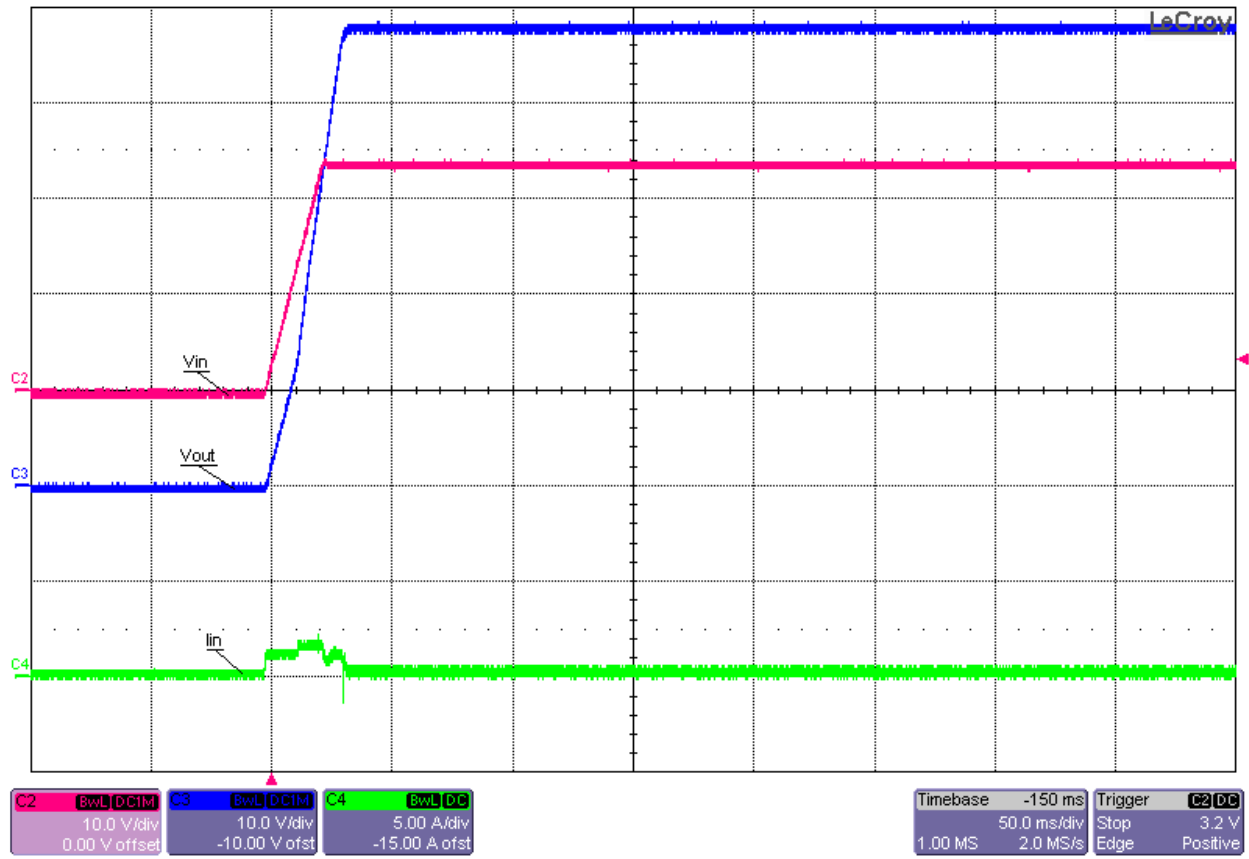


Startup into No Load at 24Vin

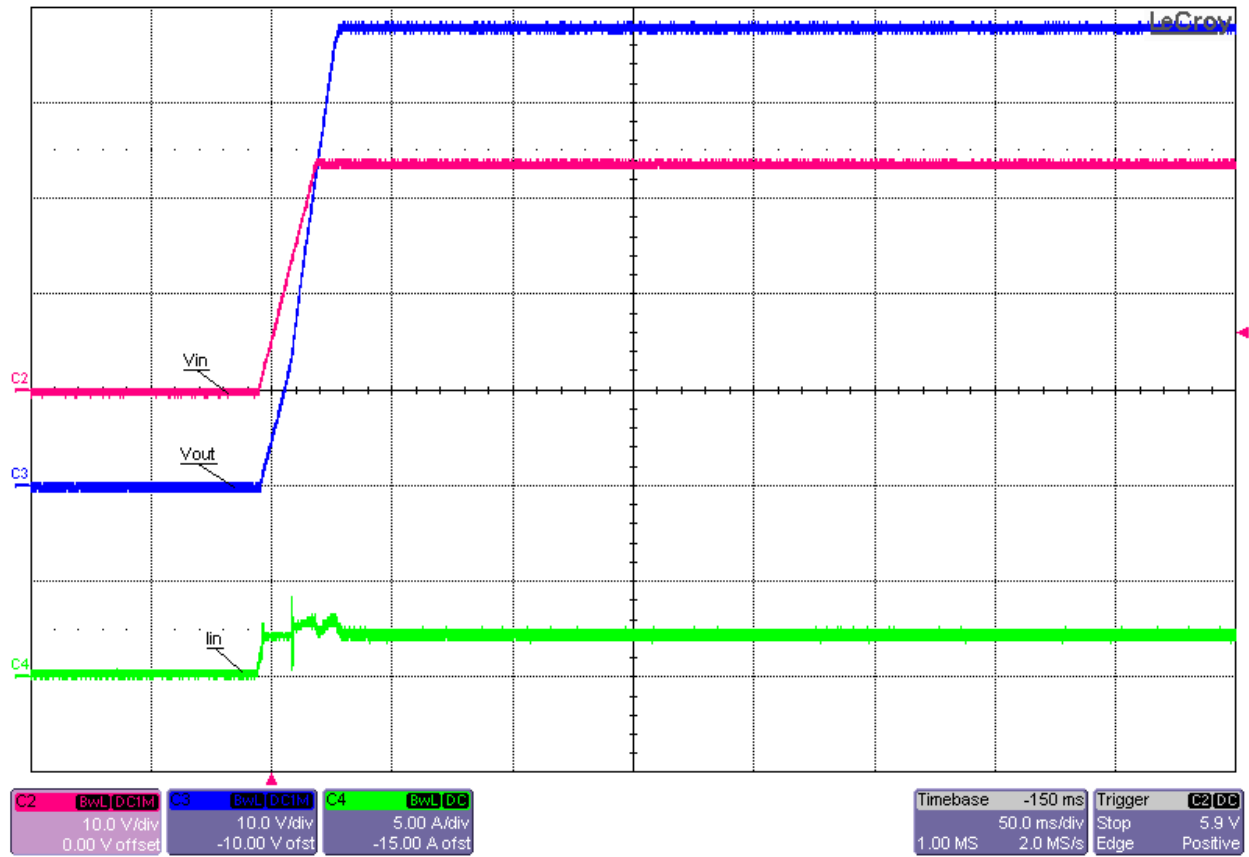

Startup into 1A Load at 24Vin

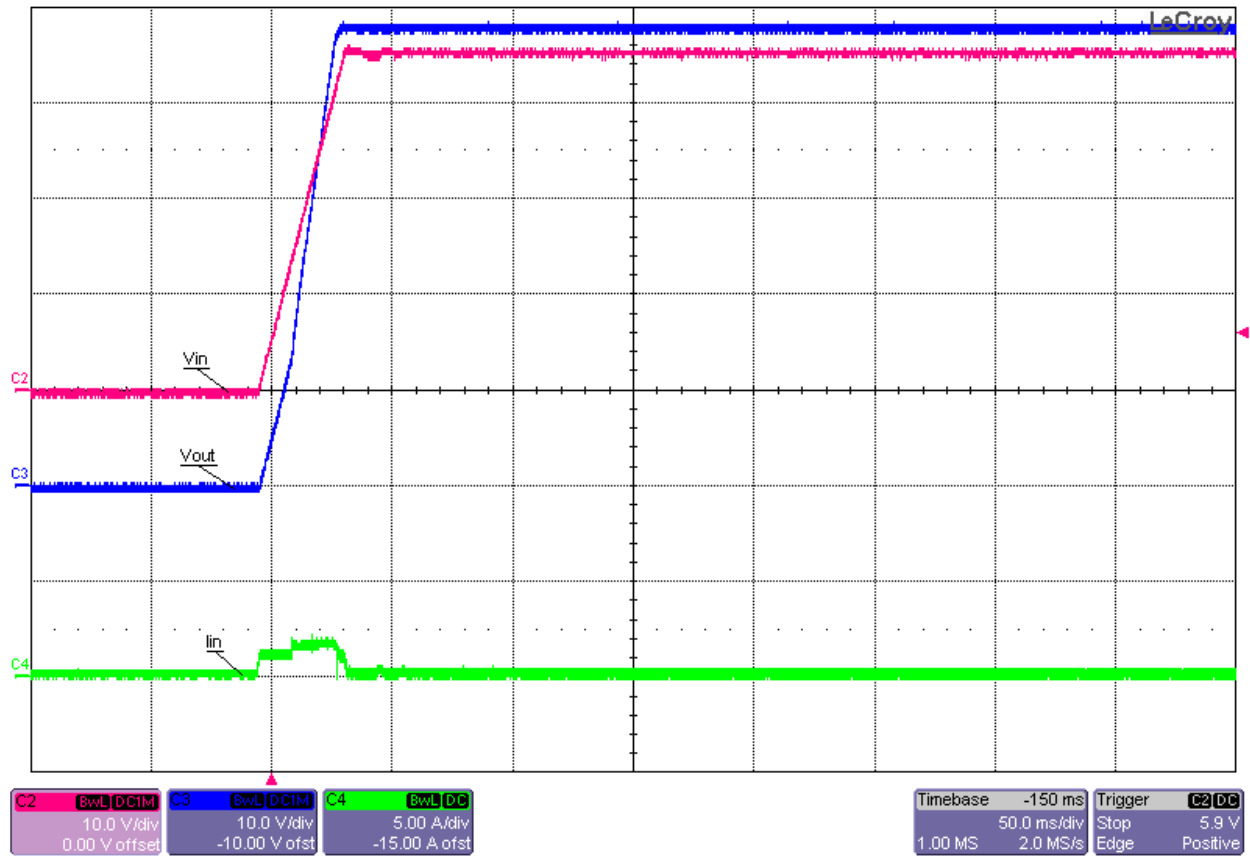


Startup into No Load at 36Vin

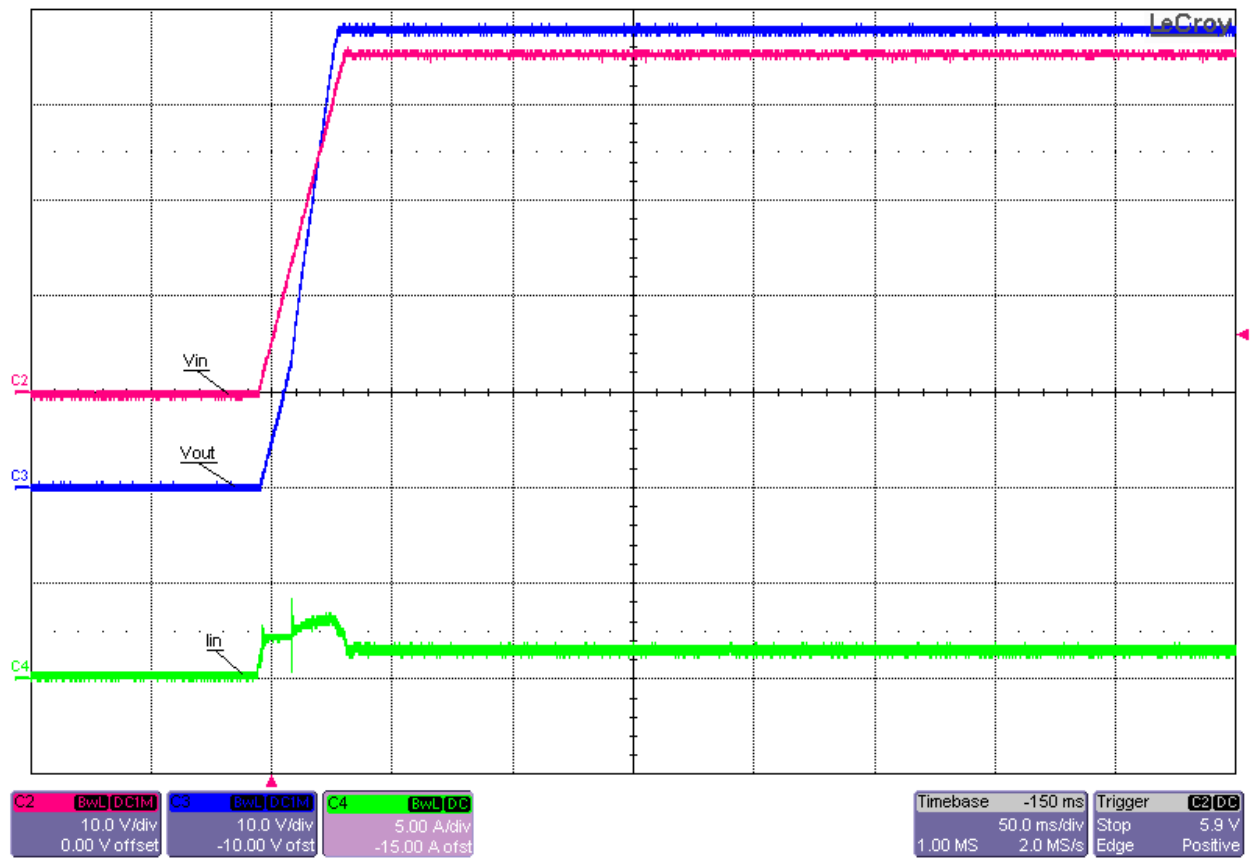


Startup into 1A Load at 36Vin


6.3 Output Voltage Ripple and Switch Node Voltage

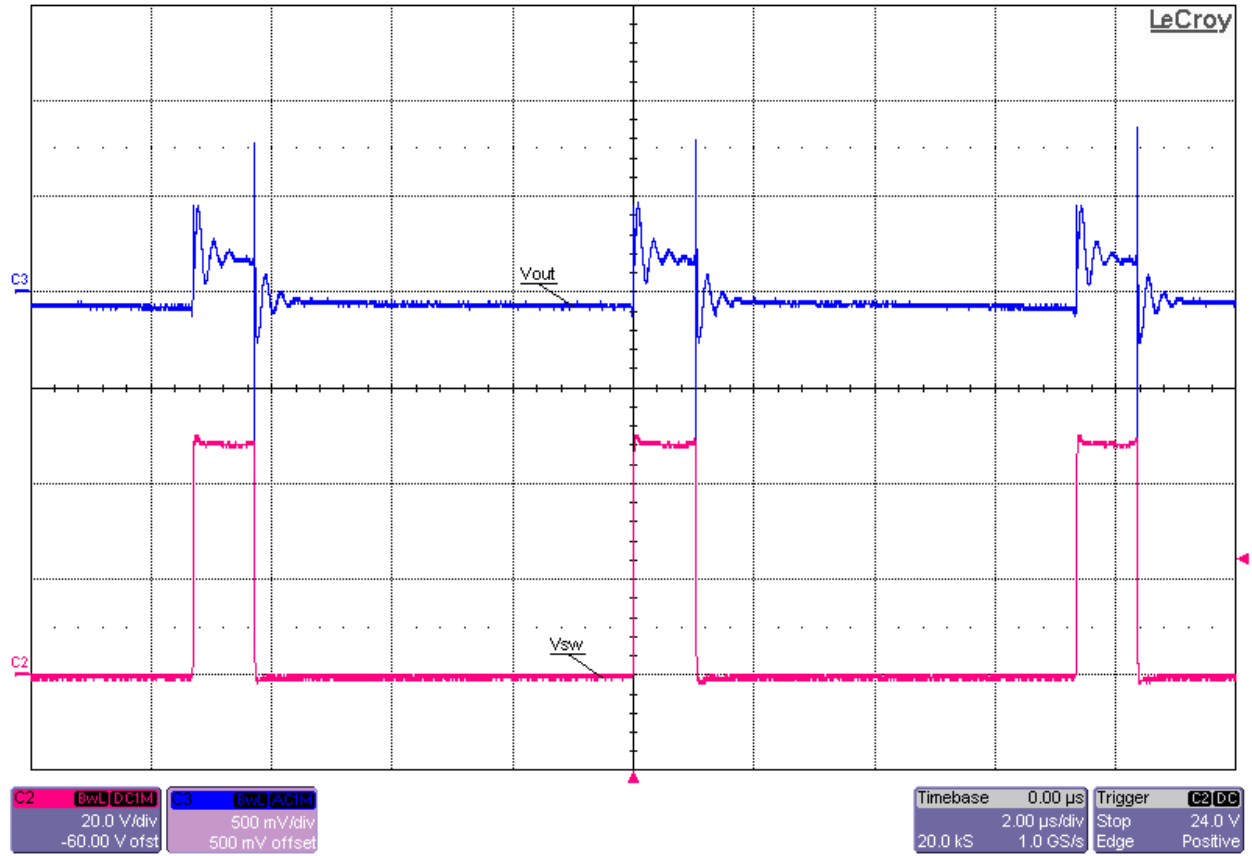


Switch Node Voltage and Output Voltage Ripple at 7V_{in} and 1A Load (V_{ripple} ≈ 750mV_{p-p})

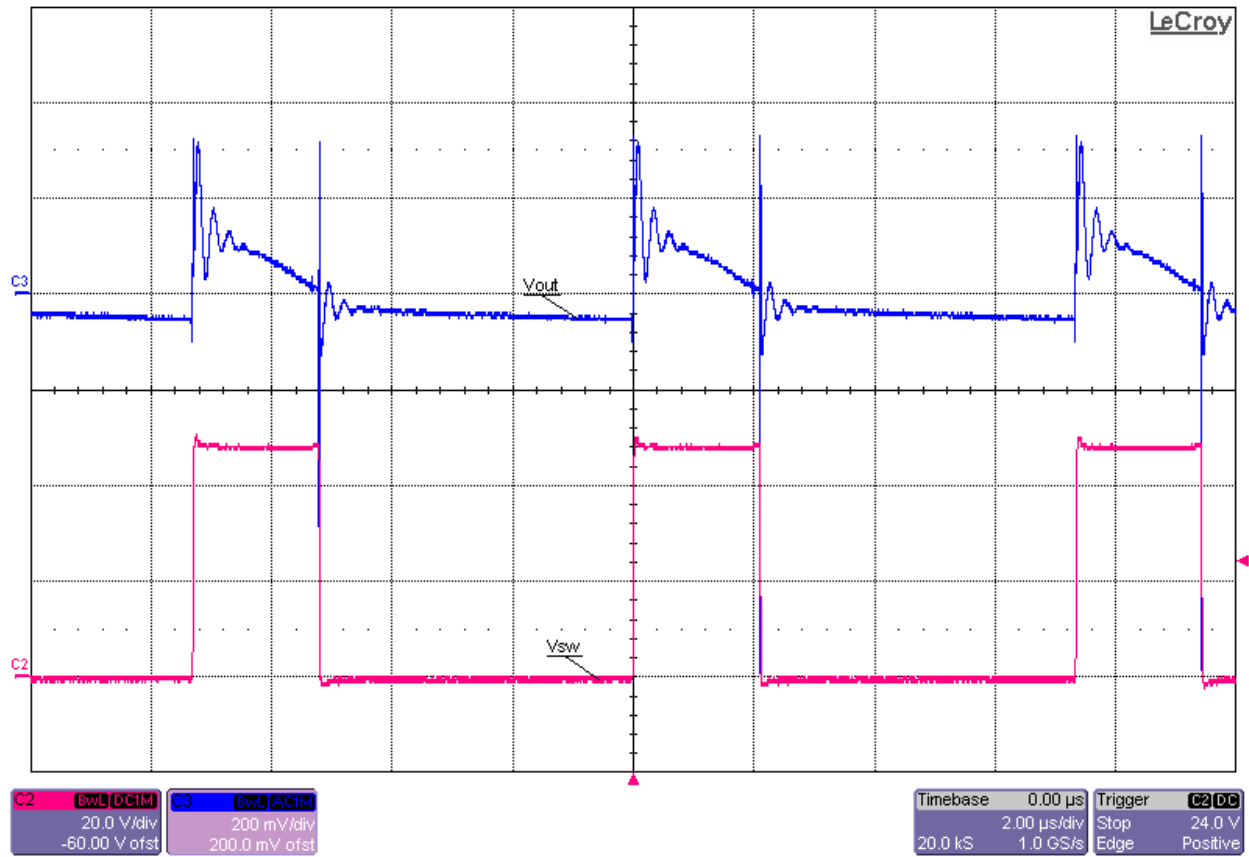

Switch Node Voltage and Output Voltage Ripple at 14Vin and 1A Load (Vripple \approx 460mVp-p)

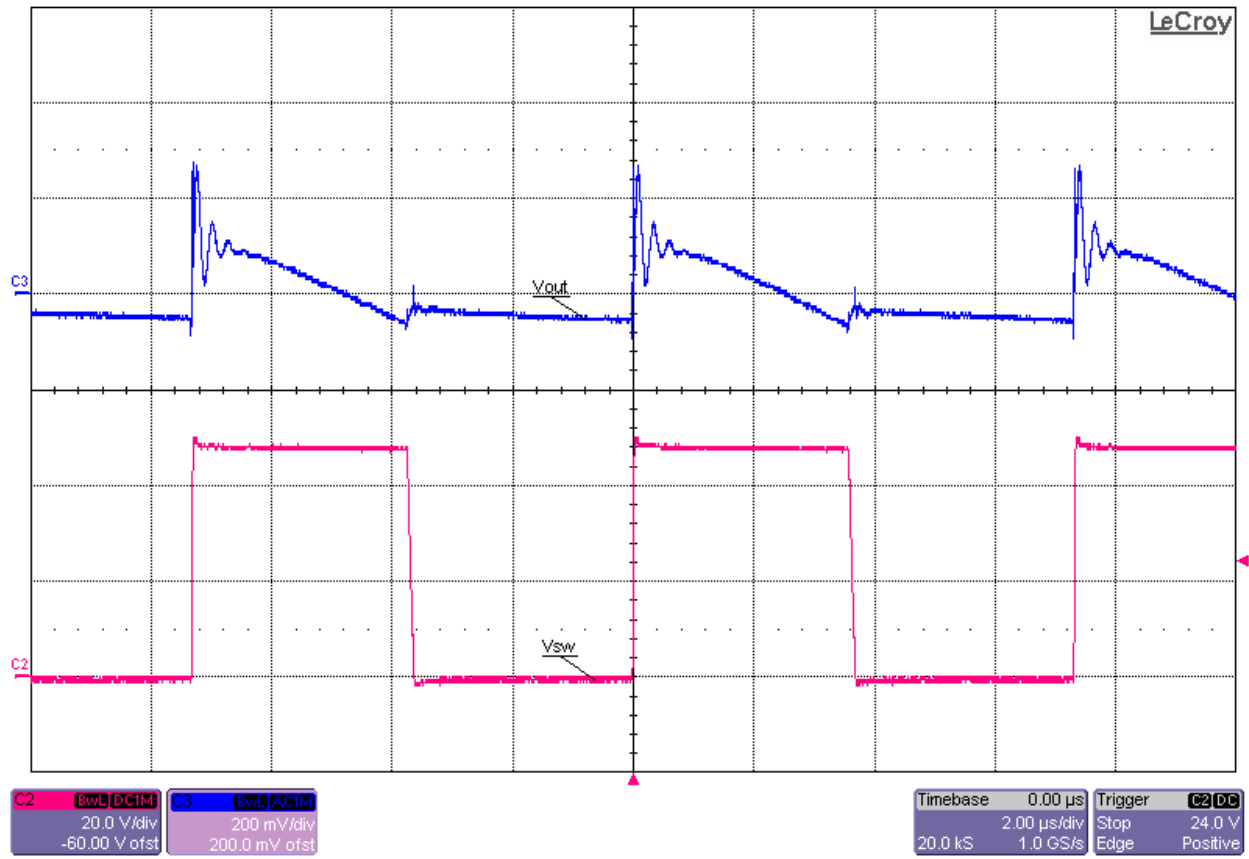

Switch Node Voltage and Output Voltage Ripple at 24Vin and 1A Load (Vripple \approx 360mVp-p)

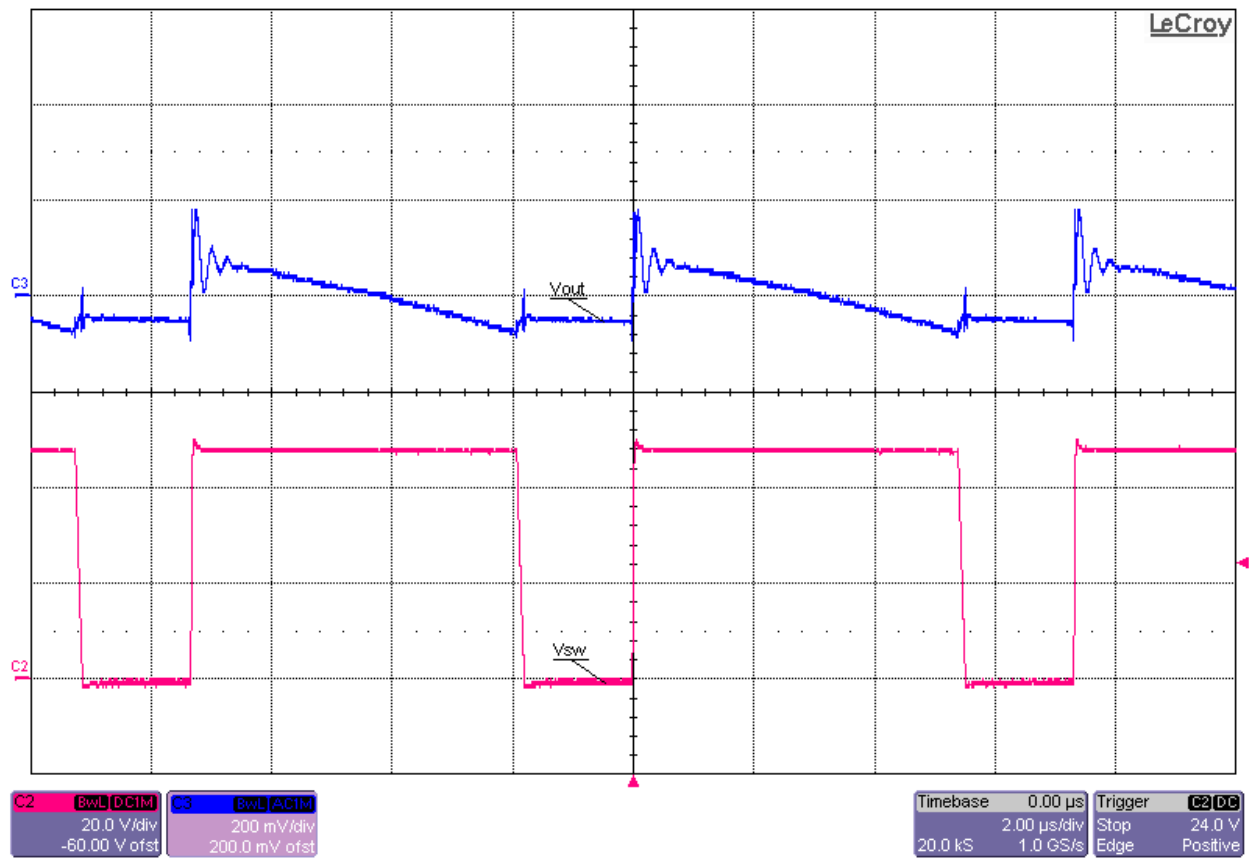

Switch Node Voltage and Output Voltage Ripple at 36V_{in} and 1A Load (V_{ripple} ≈ 260mV_{p-p})

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated