



Table of Contents

1 Overview	1
2 Functional Safety Failure In Time (FIT) Rates	2
3 Failure Mode Distribution (FMD)	3
4 Pin Failure Mode Analysis (Pin FMA)	3
5 Revision History	6

Trademarks

All trademarks are the property of their respective owners.

1 Overview

This document contains information for LM644X0-Q1 (VQFN-FCRLF (22) package) to aid in a functional safety system design. Information provided are:

- Functional Safety Failure In Time (FIT) rates of the semiconductor component estimated by the application of industry reliability standards
- Component failure modes and their distribution (FMD) based on the primary function of the device
- Pin failure mode analysis (Pin FMA)

[Figure 1-1](#) shows the device functional block diagram for reference.

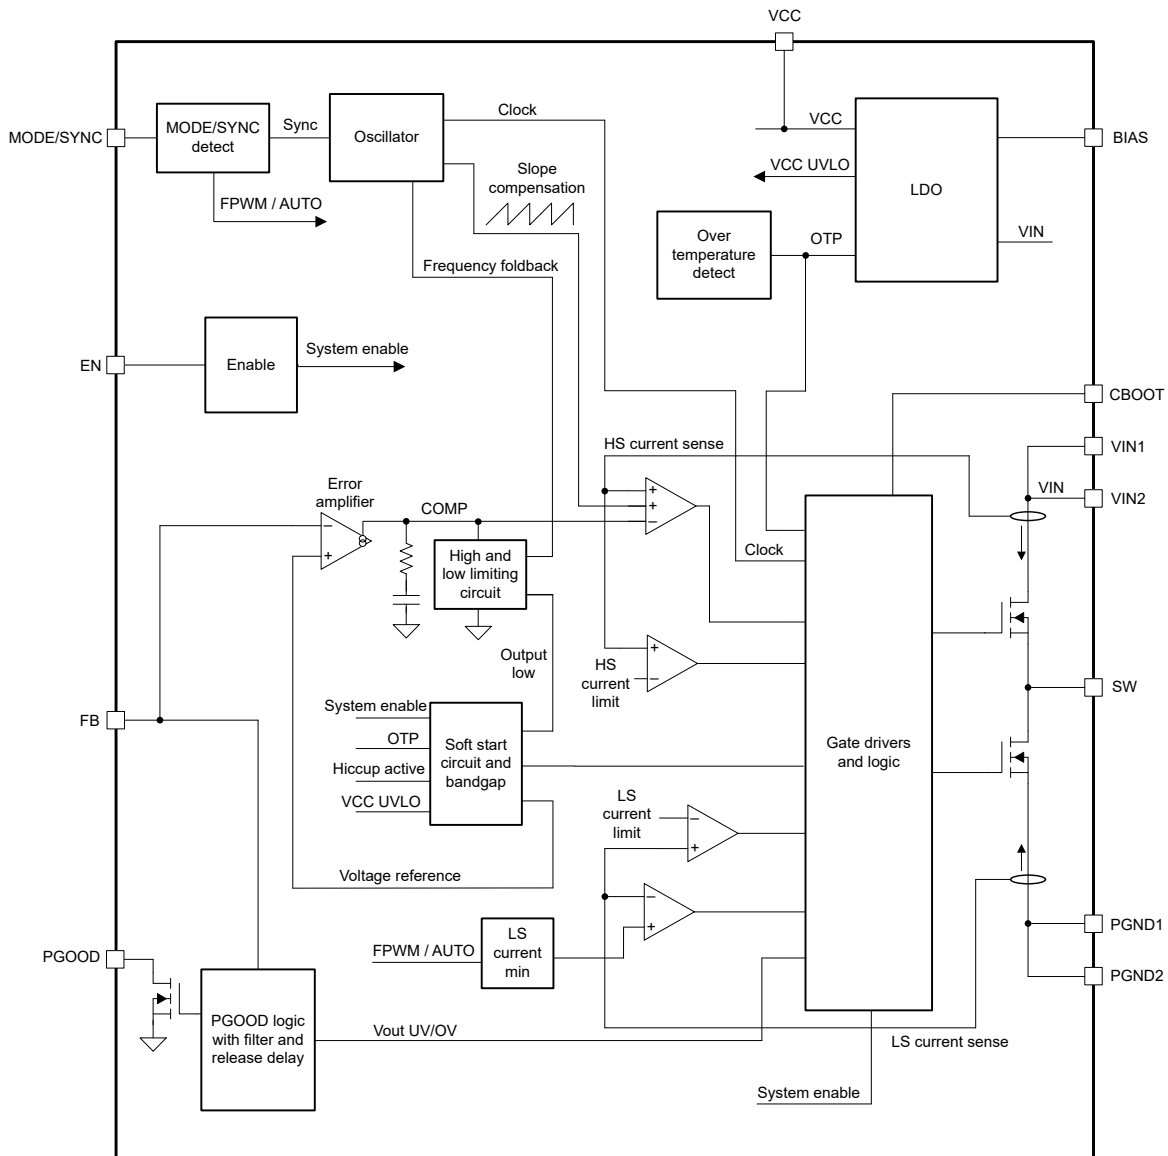


Figure 1-1. Functional Block Diagram

LM644X0-Q1 was developed using a quality-managed development process, but was not developed in accordance with the IEC 61508 or ISO 26262 standards.

ADVANCE INFORMATION for preproduction products; subject to change without notice.

2 Functional Safety Failure In Time (FIT) Rates

This section provides Functional Safety Failure In Time (FIT) rates for LM644X0-Q1 based on two different industry-wide used reliability standards:

- [Table 2-1](#) provides FIT rates based on IEC TR 62380 / ISO 26262 part 11
- [Table 2-2](#) provides FIT rates based on the Siemens Norm SN 29500-2

Table 2-1. Component Failure Rates per IEC TR 62380 / ISO 26262 Part 11

FIT IEC TR 62380 / ISO 26262	FIT (Failures Per 10 ⁹ Hours)
Total Component FIT Rate	16
Die FIT Rate	6
Package FIT Rate	10

The failure rate and mission profile information in [Table 2-1](#) comes from the Reliability data handbook IEC TR 62380 / ISO 26262 part 11:

- Mission Profile: Motor Control from Table 11
- Power dissipation: 700mW
- Climate type: World-wide Table 8
- Package factor (lambda 3): Table 17b
- Substrate Material: FR4
- EOS FIT rate assumed: 0 FIT

Table 2-2. Component Failure Rates per Siemens Norm SN 29500-2

Table	Category	Reference FIT Rate	Reference Virtual T _J
5	CMOS, BICMOS Digital, analog / mixed signal less than 50V supply	25 FIT	55°C

The Reference FIT Rate and Reference Virtual T_J (junction temperature) in [Table 2-2](#) come from the Siemens Norm SN 29500-2 tables 1 through 5. Failure rates under operating conditions are calculated from the reference failure rate and virtual junction temperature using conversion information in SN 29500-2 section 4.

3 Failure Mode Distribution (FMD)

The failure mode distribution estimation for the LM644X0-Q1 in [Table 3-1](#) comes from the combination of common failure modes listed in standards such as IEC 61508 and ISO 26262, the ratio of sub-circuit function size and complexity and from best engineering judgment.

The failure modes listed in this section reflect random failure events and do not include failures due to misuse or overstress.

Table 3-1. Die Failure Modes and Distribution

Die Failure Modes	Failure Mode Distribution
SW no output	45%
SW output not in specification – voltage or timing	40%
SW power FET stuck on	5%
PGOOD false trip, fails to trip	5%
Short circuit any two pins	5%

4 Pin Failure Mode Analysis (Pin FMA)

This section provides a Failure Mode Analysis (FMA) for the pins of the LM644X0-Q1. The failure modes covered in this document include the typical pin-by-pin failure scenarios:


- Pin short-circuited to Ground (see [Table 4-2](#))
- Pin open-circuited (see [Table 4-3](#))
- Pin short-circuited to an adjacent pin (see [Table 4-4](#))
- Pin short-circuited to supply (see [Table 4-5](#))

[Table 4-2](#) through [Table 4-5](#) also indicate how these pin conditions can affect the device as per the failure effects classification in [Table 4-1](#).

Table 4-1. TI Classification of Failure Effects

Class	Failure Effects
A	Potential device damage that affects functionality
B	No device damage, but loss of functionality
C	No device damage, but performance degradation
D	No device damage, no impact to functionality or performance

[Figure 4-1](#) shows the LM644X0-Q1 pin diagram. For a detailed description of the device pins please refer to the *Pin Configuration and Functions* section in the LM644X0-Q1 data sheet.

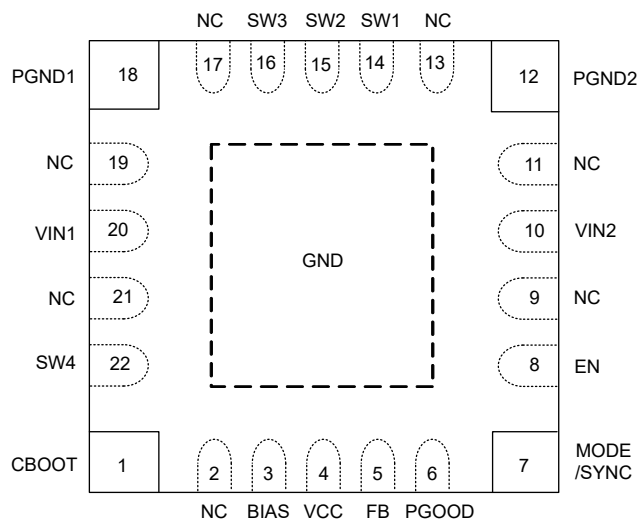
Figure 4-1. Pin Diagram

Following are the assumptions of use and the device configuration assumed for the pin FMA in this section:

- Application circuit, as per the [LM64460-Q1 data sheet](#) is used.

Table 4-2. Pin FMA for Device Pins Short-Circuited to Ground

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
CBOOT	1	$V_{OUT} = 0V$	B
NC	2	No effect	D
BIAS	3	Normal Operation, Chip power now from VIN causing decreased efficiency	C
VCC	4	$V_{OUT} = 0V$	B
FB	5	$V_{OUT} \gg$ than programmed output voltage	B
PGOOD	6	PGOOD not valid signal. No other changes to chip performance. V_{OUT} in regulation	C
MODE/SYNC	7	AUTO mode operation only, V_{OUT} normal	C
EN	8	$V_{OUT} = 0V$	B
NC	9	No effect	D
VIN2	10	$V_{OUT} = 0V$	B
NC	11	No effect	D
PGND2	12	No effect	D
NC	13	No effect	D
SW1	14	Damage to HS FET	A
SW2	15	Damage to HS FET	A
SW3	16	Damage to HS FET	A
NC	17	No effect	D
PGND1	18	No effect	D
NC	19	No effect	D
VIN1	20	$V_{OUT} = 0V$	B
NC	21	No effect	D
SW4	22	Damage to HS FET	A
GND	DAP	No effect	D

Table 4-3. Pin FMA for Device Pins Open-Circuited

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
CBOOT	1	$V_{OUT} = 0V$	B
NC	2	No effect	D
BIAS	3	Normal Operation, Chip power now from VIN causing decreased efficiency	C
VCC	4	VCC output is unstable and can increase above 5.5V rating of VCC pin	A
FB	5	$V_{OUT} \gg$ than programmed output voltage.	B
PGOOD	6	PGOOD not valid signal. V_{OUT} in regulation	C
MODE/SYNC	7	AUTO vs FPWM and spread spectrum operation undetermined, V_{OUT} normal	C
EN	8	Unpredictable operation	B
NC	9	No effect	D
VIN2	10	V_{OUT} normal. Current loop is affected, potentially affecting noise/jitter/EMI/reliability	C
NC	11	No effect	D
PGND2	12	V_{OUT} normal. Current loop is affected, potentially affecting noise/jitter/EMI/reliability	C
NC	13	No effect	D
SW1	14	No effect, 2 SW pins sufficient	D
SW2	15	No effect, 2 SW pins sufficient	D
SW3	16	No effect, 2 SW pins sufficient	D
NC	17	No effect	D
PGND1	18	V_{OUT} normal. Current loop is affected, potentially affecting noise/jitter/EMI/reliability	C
NC	19	No effect	D
VIN1	20	V_{OUT} normal. Current loop is affected, potentially affecting noise/jitter/EMI/reliability	C
NC	21	No effect	D
SW4	22	$V_{OUT} = 0V$, Needed for CBOOT	B
GND	DAP	Load regulation degraded, thermal impedance impacted	C

Table 4-4. Pin FMA for Device Pins Short-Circuited to Adjacent Pin

Pin Name	Pin No.	Shorted to	Description of Potential Failure Effects	Failure Effect Class
CBOOT	1	NC	No effect	D
NC	2	BIAS	No effect	D
BIAS	3	VCC	VCC ESD clamp damaged if BIAS > 5V	A
VCC	4	FB	$V_{OUT} = 0V$	B
FB	5	PGOOD	V_{OUT} can become \gg than programmed output voltage	B
PGOOD	6	MODE/SYNC	FPWM mode operation only, V_{OUT} normal	C
MODE/SYNC	7	EN	FPWM mode operation only, V_{OUT} normal	C
EN	8	NC	No effect	D
NC	9	VIN2	No effect	D
VIN2	10	NC	No effect	D
NC	11	PGND2	No effect	D
PGND2	12	NC	No effect	D
NC	13	SW1	No effect	D
SW1	14	SW2	No effect	D
SW2	15	SW3	No effect	D
SW3	16	NC	No effect	D
NC	17	PGND1	No effect	D
PGND1	18	NC	No effect	D
NC	19	VIN1	No effect	D
VIN1	20	NC	No effect	D

Table 4-4. Pin FMA for Device Pins Short-Circuited to Adjacent Pin (continued)

Pin Name	Pin No.	Shorted to	Description of Potential Failure Effects	Failure Effect Class
NC	21	SW4	No effect	D
SW4	22	CBOOT	V _{OUT} = 0V	B
GND	DAP	Any	Other pin is shorted to ground, see Table 4-2	

Table 4-5. Pin FMA for Device Pins Short-Circuited to supply

Pin Name	Pin No.	Description of Potential Failure Effects	Failure Effect Class
CBOOT	1	V _{OUT} = 0V. CBOOT ESD clamp runs current to destruction.	A
NC	2	No effect	D
BIAS	3	If VIN exceeds 16V damage occurs. If below, normal operation	A
VCC	4	If VIN exceeds 5.5V damage occurs.	A
FB	5	If VIN exceeds 16V damage occurs. V _{OUT} = 0V	A
PGOOD	6	V _{OUT} = 0V. PGOOD ESD clamp runs current to destruction	A
MODE/SYNC	7	Runs in FPWM mode	C
EN	8	V _{OUT} normal	D
NC	9	No effect	D
VIN2	10	No effect	D
NC	11	No effect	D
PGND2	12	V _{OUT} = 0V	B
NC	13	No effect	D
SW1	14	Damage to LS FET	A
SW2	15	Damage to LS FET	A
SW3	16	Damage to LS FET	A
NC	17	No effect	D
PGND1	18	V _{OUT} = 0V	B
NC	19	No effect	D
VIN1	20	No effect	D
NC	21	No effect	D
SW4	22	Damage to LS FET	A
GND	DAP	V _{OUT} = 0V	B

5 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (092021) to Revision A (052024)

Page

- | | |
|--|---|
| • Changed part number to LM644X0-Q1..... | 1 |
|--|---|

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated