



1 Photo

The photographs below show the PMP10928 Rev A assembly. This circuit was built on a PMP10928 Rev A PCB.

Top side

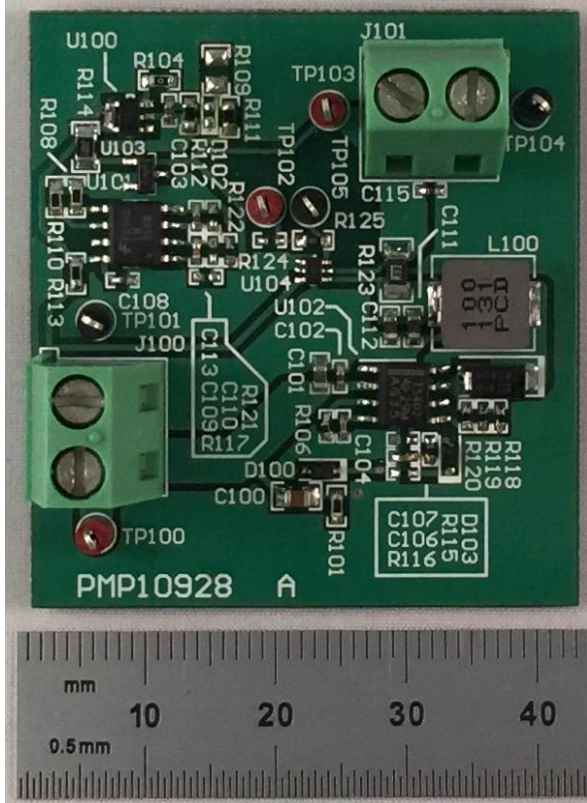


Bottom side

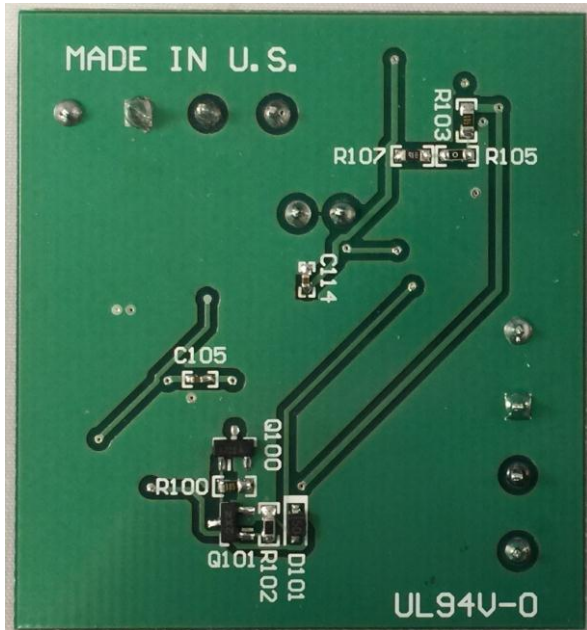

2 Converter Efficiency

The efficiency data is shown in the tables and graph below.

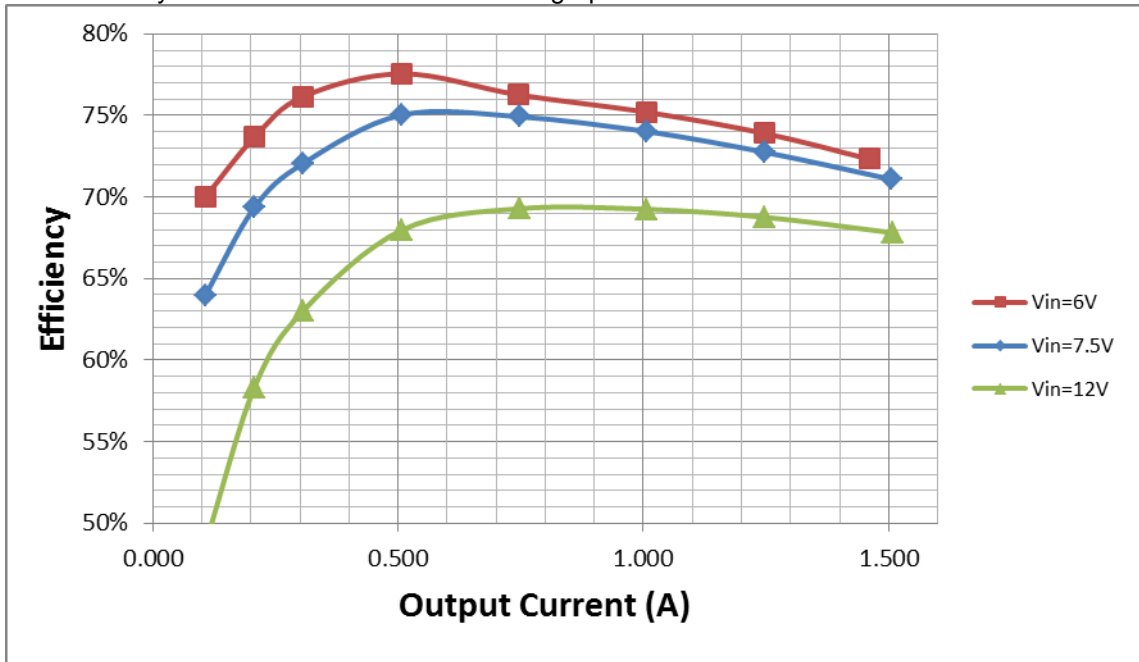

V_{in}=6V

V _{in} (DC)	I _{in} (A)	P _{in} (W)	V _{out} (V)	I _{out} (A)	P _{out} (W)	Losses(W)	Eff. (%)
6.04	0.50400	3.044	1.507	1.461	2.202	0.842433	72.33%
5.98	0.41400	2.476	1.466	1.248	1.830	0.646152	73.90%
6.03	0.32700	1.972	1.471	1.008	1.483	0.489042	75.20%
6.07	0.23800	1.445	1.477	0.746	1.102	0.342818	76.27%
6.01	0.16140	0.971	1.482	0.508	0.753	0.2178036	77.56%
6.07	0.09870	0.599	1.486	0.307	0.456	0.1427096	76.17%
6.03	0.06930	0.418	1.488	0.207	0.308	0.1100709	73.67%
6.01	0.03800	0.228	1.493	0.107	0.160	0.068439	70.01%
6.08	0.00424	0.026	1.502	0.000	0.000	0.02579192	0.00%

V_{in}=7.5V


Vin(DC)	Iin(A)	Pin(W)	Vout(V)	Iout(A)	Pout(W)	Losses(W)	Eff. (%)
7.48	0.41410	3.097	1.461	1.507	2.202	0.895741	71.08%
7.51	0.33460	2.513	1.466	1.247	1.828	0.684744	72.75%
7.47	0.26820	2.003	1.471	1.008	1.483	0.520686	74.01%
7.54	0.19530	1.473	1.477	0.747	1.103	0.369243	74.93%
7.49	0.13370	1.001	1.482	0.507	0.751	0.250039	75.03%
7.50	0.08440	0.633	1.486	0.307	0.456	0.176798	72.07%
7.46	0.05953	0.444	1.488	0.207	0.308	0.1360778	69.36%
7.52	0.03320	0.250	1.493	0.107	0.160	0.089913	63.99%
7.49	0.00529	0.040	1.505	0.000	0.000	0.0396221	0.00%

V_{in}=12V

Vin(DC)	Iin(A)	Pin(W)	Vout(V)	Iout(A)	Pout(W)	Losses(W)	Eff. (%)
11.97	0.27160	3.251	1.462	1.508	2.205	1.046356	67.81%
11.98	0.22240	2.664	1.468	1.248	1.832	0.832288	68.76%
11.98	0.17880	2.142	1.473	1.007	1.483	0.658713	69.25%
11.99	0.13290	1.593	1.478	0.747	1.104	0.489405	69.29%
11.98	0.09250	1.108	1.483	0.508	0.753	0.354786	67.98%
11.95	0.06060	0.724	1.487	0.307	0.457	0.267661	63.04%
11.99	0.04408	0.529	1.489	0.207	0.308	0.2202962	58.32%
12.03	0.02727	0.328	1.494	0.107	0.160	0.1682001	48.73%
12.07	0.00872	0.105	1.512	0.000	0.000	0.1052504	0.00%

3 CC/CV curve

The constant current, constant voltage curve of PMP10928 Rev A is shown as below.

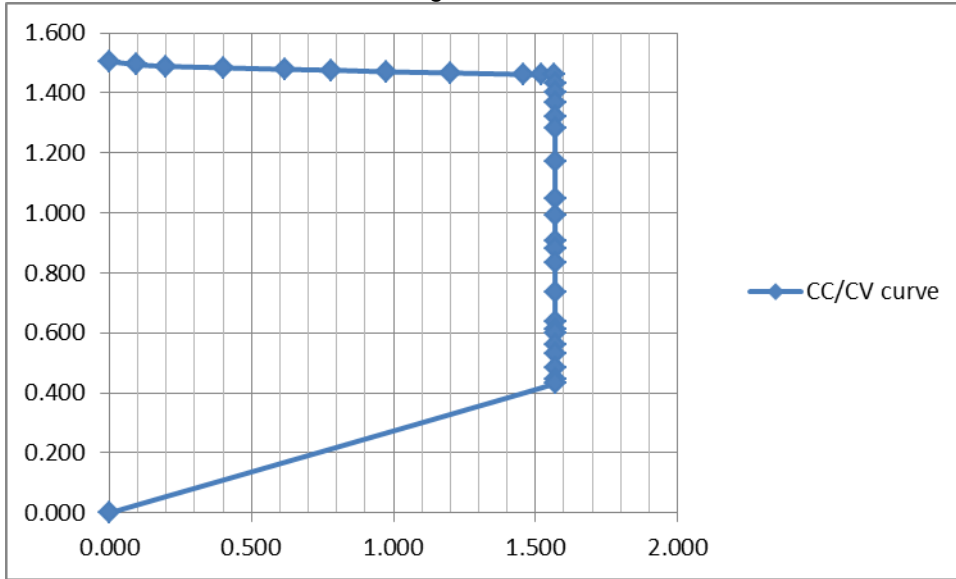

Vout(V)	1.505	1.495	1.489	1.484	1.479	1.476	1.471	1.467	1.462	1.461	1.460	1.432
Iout(A)	0.000	0.096	0.201	0.402	0.619	0.780	0.975	1.201	1.460	1.523	1.568	1.569


Vout(V)	1.403	1.367	1.319	1.284	1.170	1.049	0.992	0.906	0.879	0.836	0.736	0.638
Iout(A)	1.569	1.569	1.569	1.569	1.569	1.569	1.569	1.569	1.569	1.569	1.569	1.569

Vout(V)	0.612	0.600	0.562	0.532	0.483	0.444	0.431	0.000
Iout(A)	1.569	1.569	1.569	1.569	1.569	1.569	1.569	0.000


4 Startup

The output voltages at startup are shown in the images below.

4.1 1.5A Load @ 7.5V_{IN}:

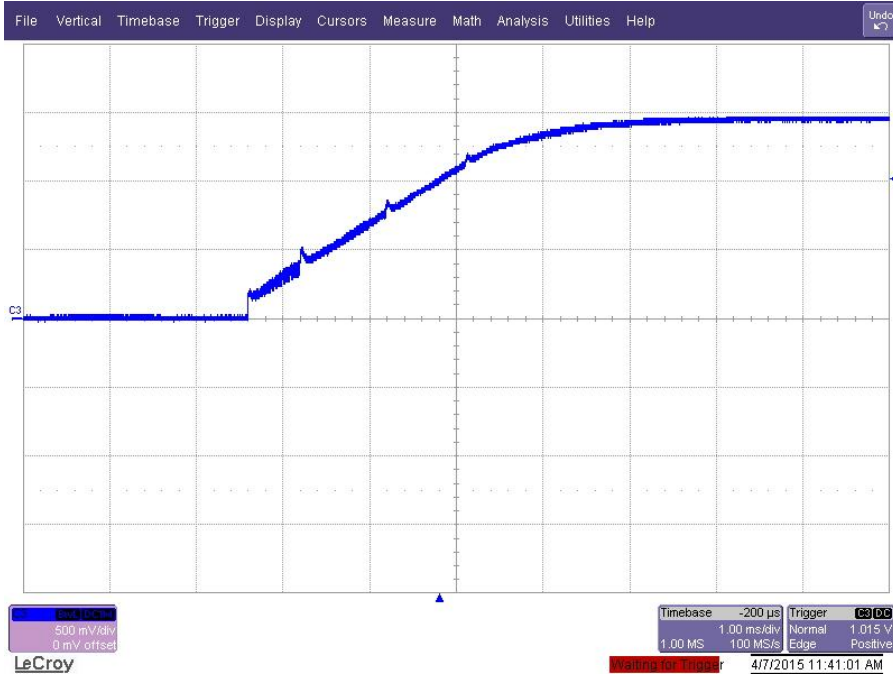

4.2 0A Load @ 7.5V_{IN}:

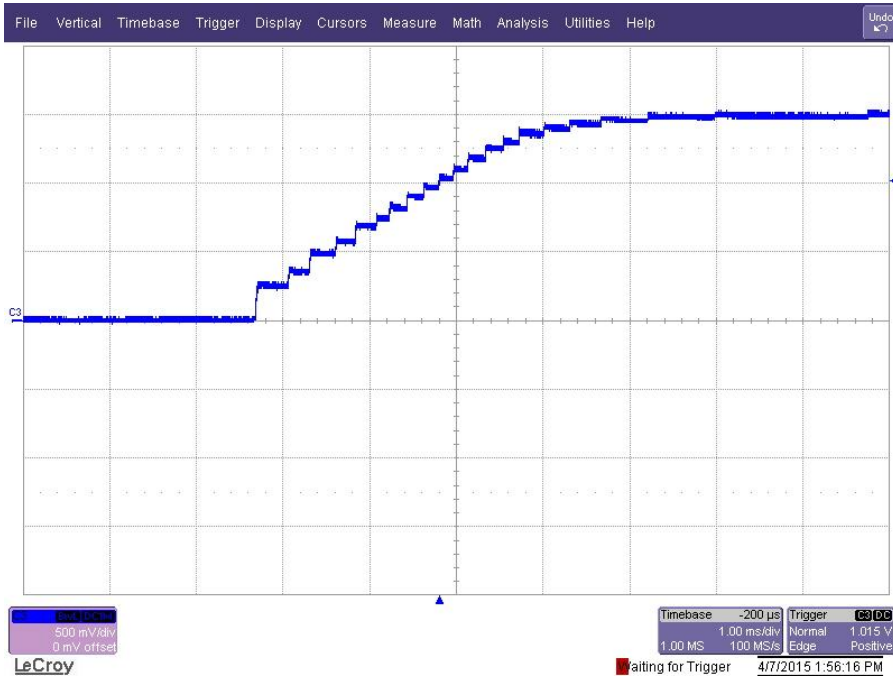

5 Turn-off

The output voltages at startup are shown in the images below.


5.1 1.5A Load @ 7.5V_{IN}:




6 Output Ripple Voltages

The output ripple voltages are shown in the plots below.

6.1 1.5A Load @ 7.5V_{IN}:

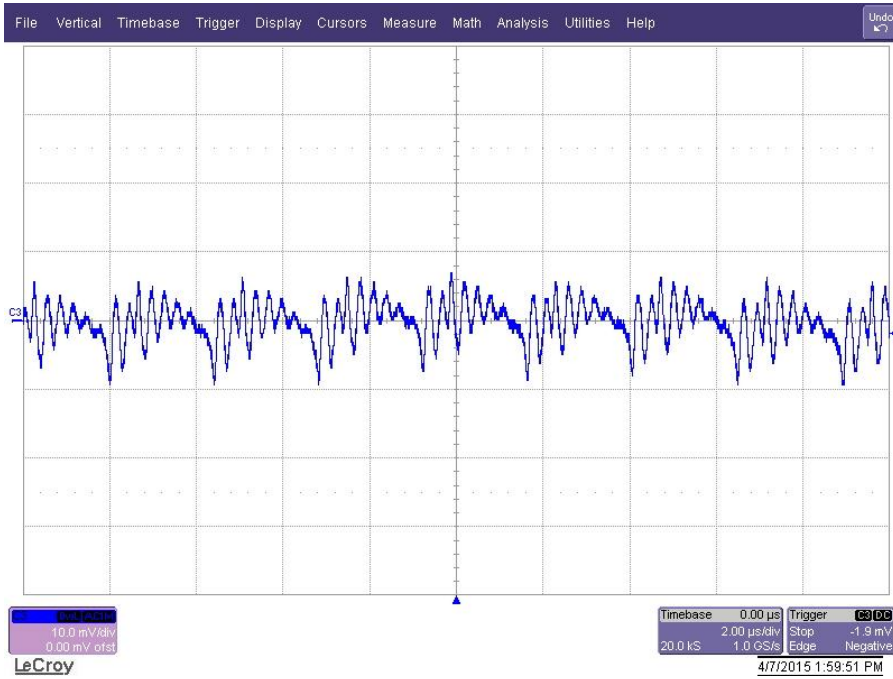

6.2 0A Load @ 7.5V_{IN}:

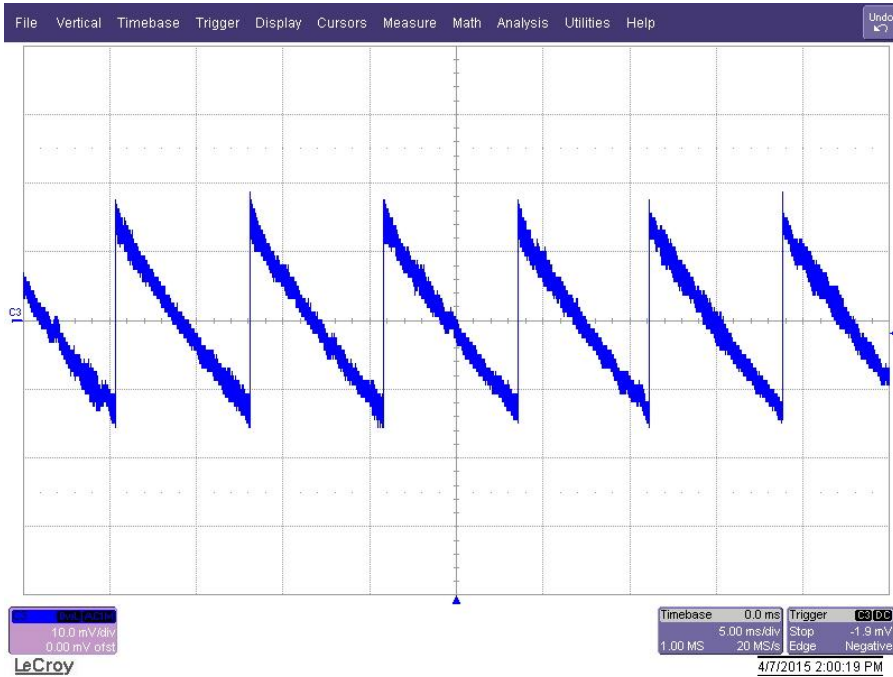

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated