

## PMP30236 Rev.C – Test Report

---

### Automotive Pre-Booster

- Input            2.7 .. 10.5V nominal, 32.0V peak
- Output           10.5V @ 3.0A
- Free-Running-Switching Frequency of 400 kHz
- Due to thermal limitations of the FET package operation at minimum input voltage is limited to a few seconds.



## PMP30236 Rev.C – Test Report

## 1. Startup

The startup waveform at 6.0V input voltage and no load on the 10.5V output is shown in Figure 1.

Channel C1 **6.0V Input Voltage**

2V/div, 1ms/div

Channel C2 **10.5V Output Voltage**

2V/div, 1ms/div

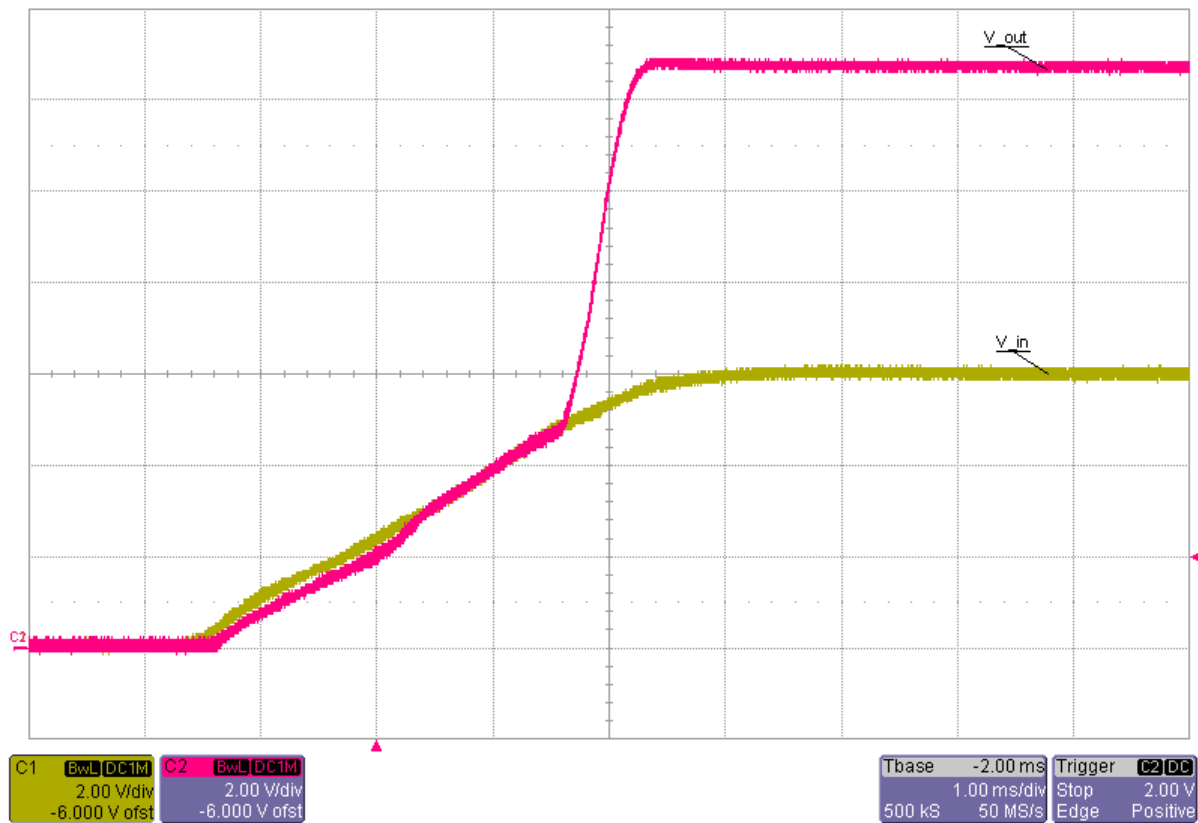


Figure 1

## 2. Shutdown

The shutdown waveform at 6.0V input voltage and 3.0A load at 10.5V output voltage is shown in Figure 2.

Channel C1 **6.0V Input Voltage**

2V/div, 500us/div

Channel C2 **10.5V Output Voltage**

2V/div, 500us/div

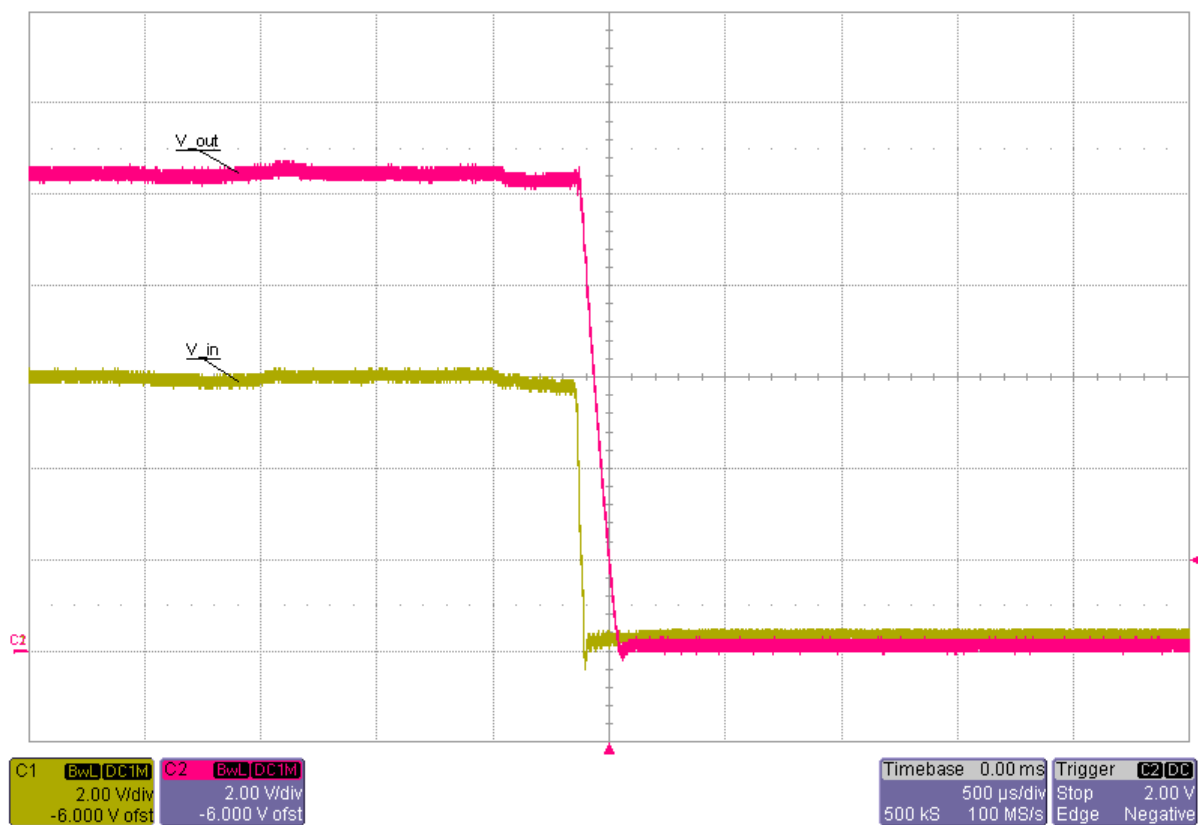


Figure 2

### 3. Efficiency

The efficiency and load regulation for the 3.0A load range are shown in Figure 3 and Figure 4.

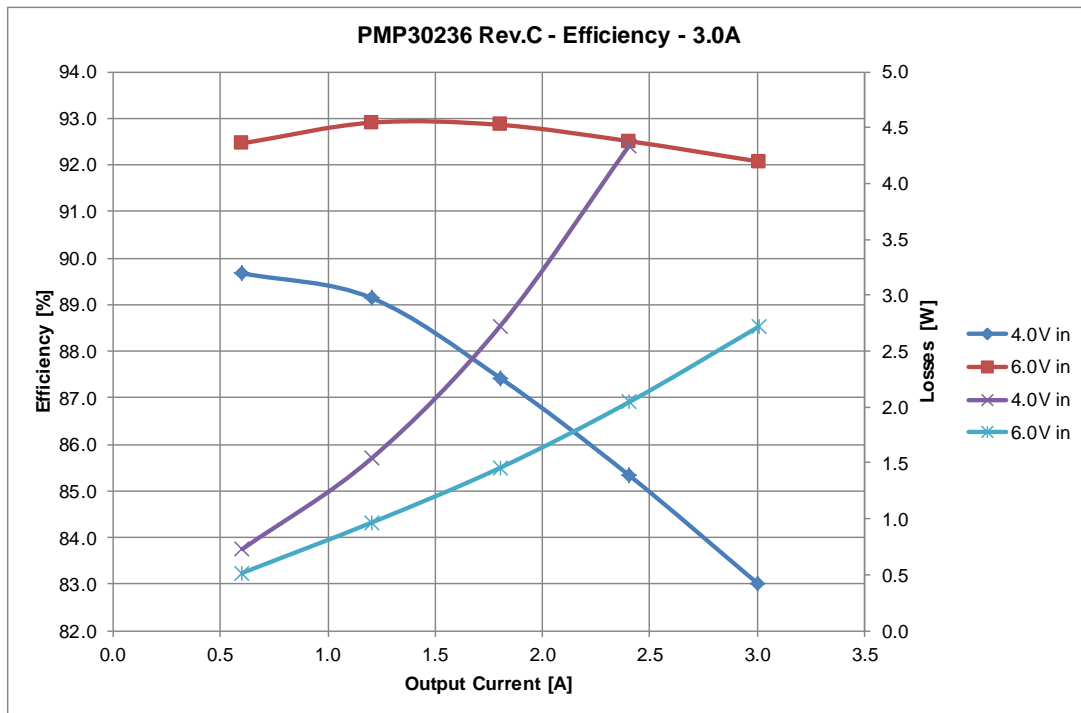


Figure 3

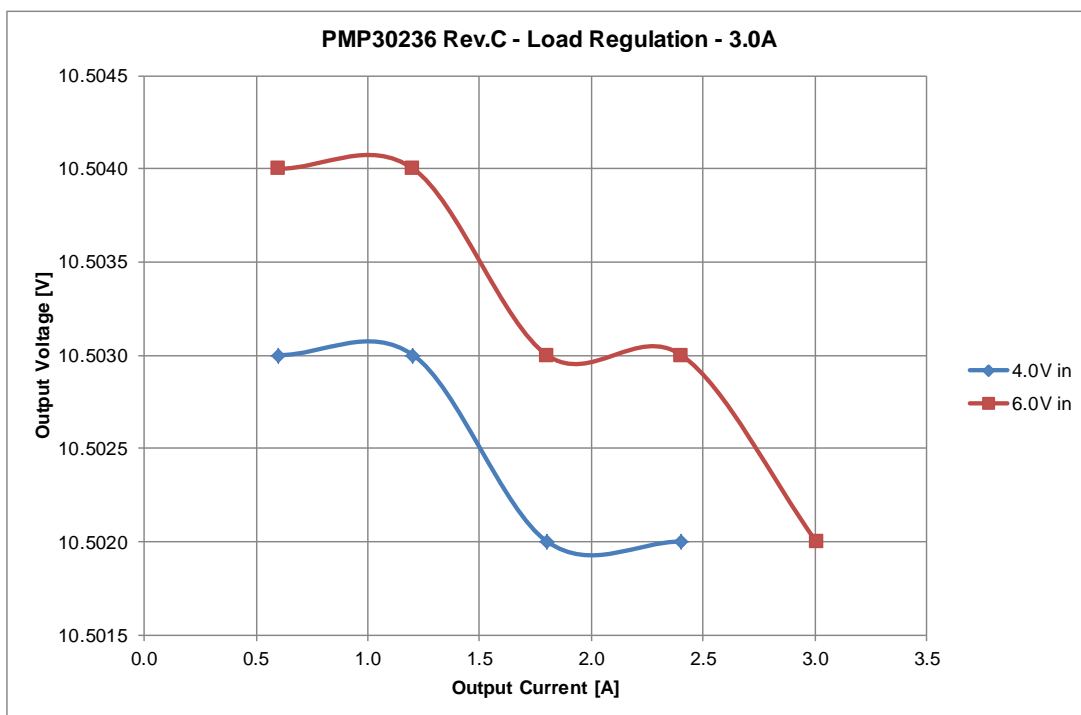


Figure 4

## 4. Transient Response

The response to a load step at 6.0V output voltage is shown in Figure 5.

Channel C1 **Output Current**, Load Step 1.5A to 3.0A  
1A/div, 1ms/div

Channel C2 **Output Voltage**, -1.51V undershoot (14.4%), 1.91V overshoot (18.2%)  
1V/div, 1ms/div, AC coupled

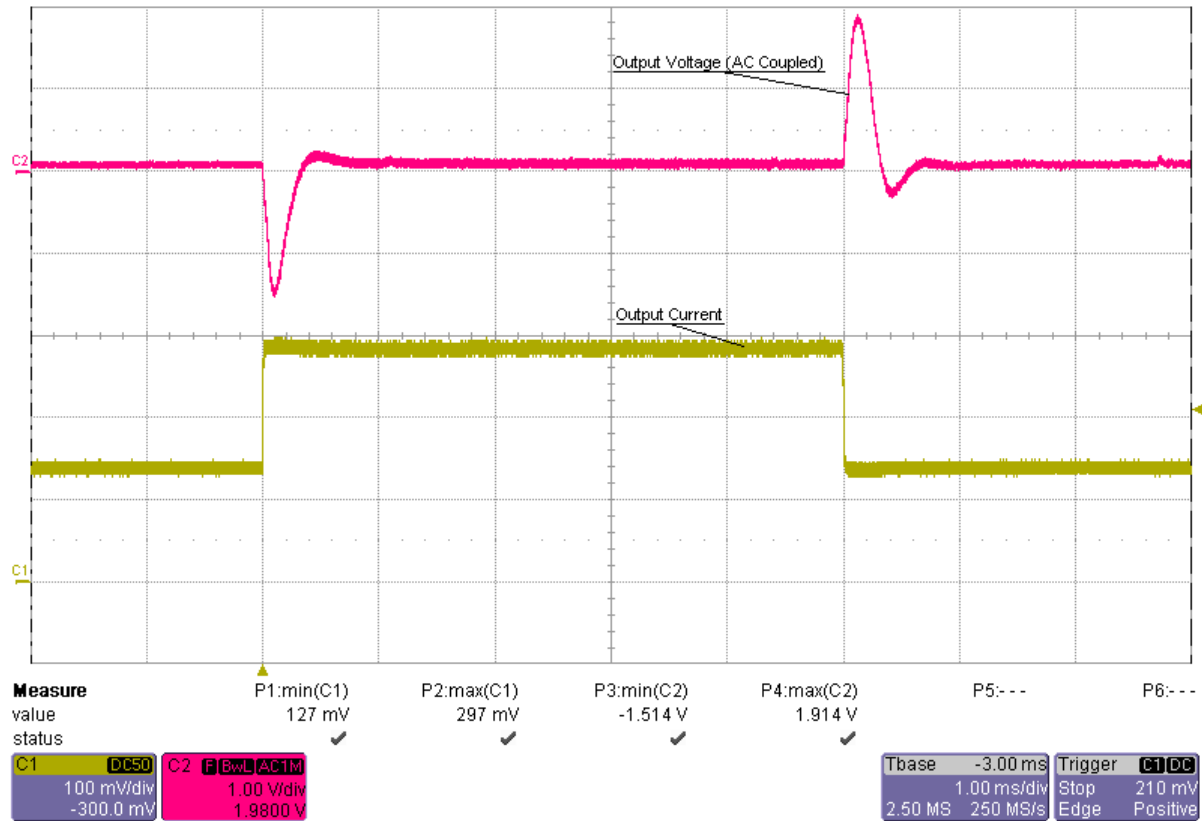


Figure 5

## 5. Frequency Response

The frequency response for the 2.0A load range is shown in Figure 6.

4.0V Input, 3.0A Load                      0.8 kHz Bandwidth, 55 deg Phase Margin, -16 dB Gain Margin

8.0V Input, 3.0A Load                      1.1 kHz Bandwidth, 79 deg Phase Margin, -25 dB Gain Margin

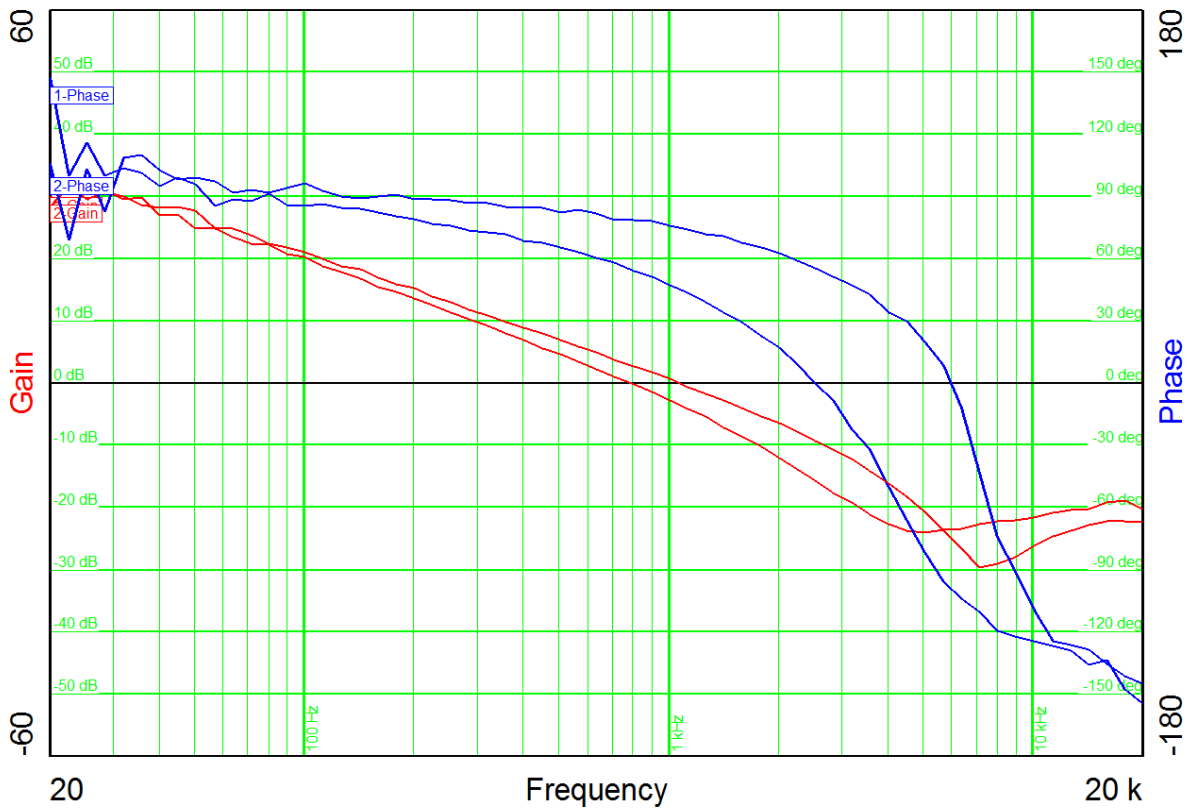


Figure 6

## 6. Input Ripple – After Input Filter

The input ripple on the connector (after the input filter) is shown in Figure 7.

Channel M1 **Input Voltage @ 4.0V Input / 3.0A Load**, 42mV peak-peak (1.1%)  
20mV/div, 50us/div

Channel M2 **Input Voltage @ 8.0V Input / 3.0A Load**, 31mV peak-peak (0.4%)  
20mV/div, 50us/div

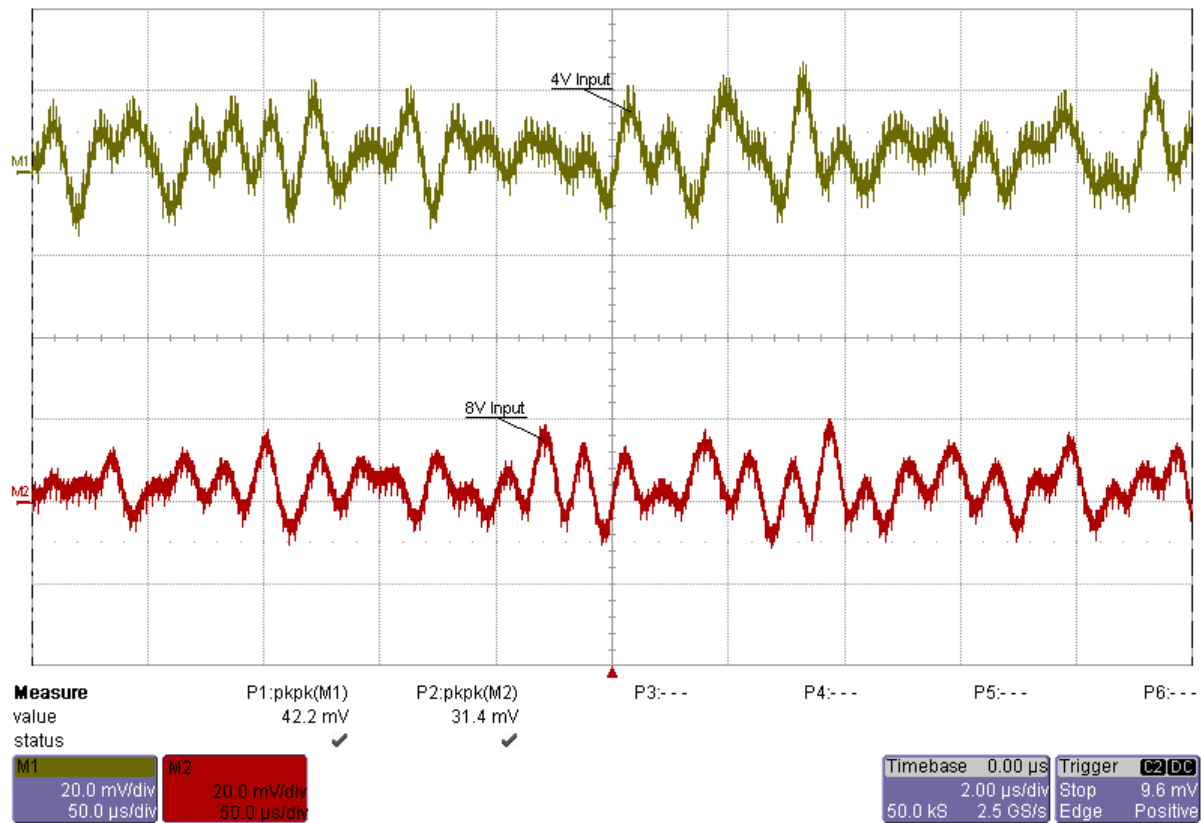


Figure 7

## PMP30236 Rev.C – Test Report

## 7. Input Ripple – Before Input Filter

The input ripple on the boost inductor (before the input filter) is shown in Figure 8. Figure 7

Channel M1 **Input Voltage @ 4.0V Input / 3.0A Load**, 126mV peak-peak (3.2%)  
50mV/div, 2us/div

Channel M2 **Input Voltage @ 8.0V Input / 3.0A Load**, 110mV peak-peak (1.4%)  
50mV/div, 2us/div

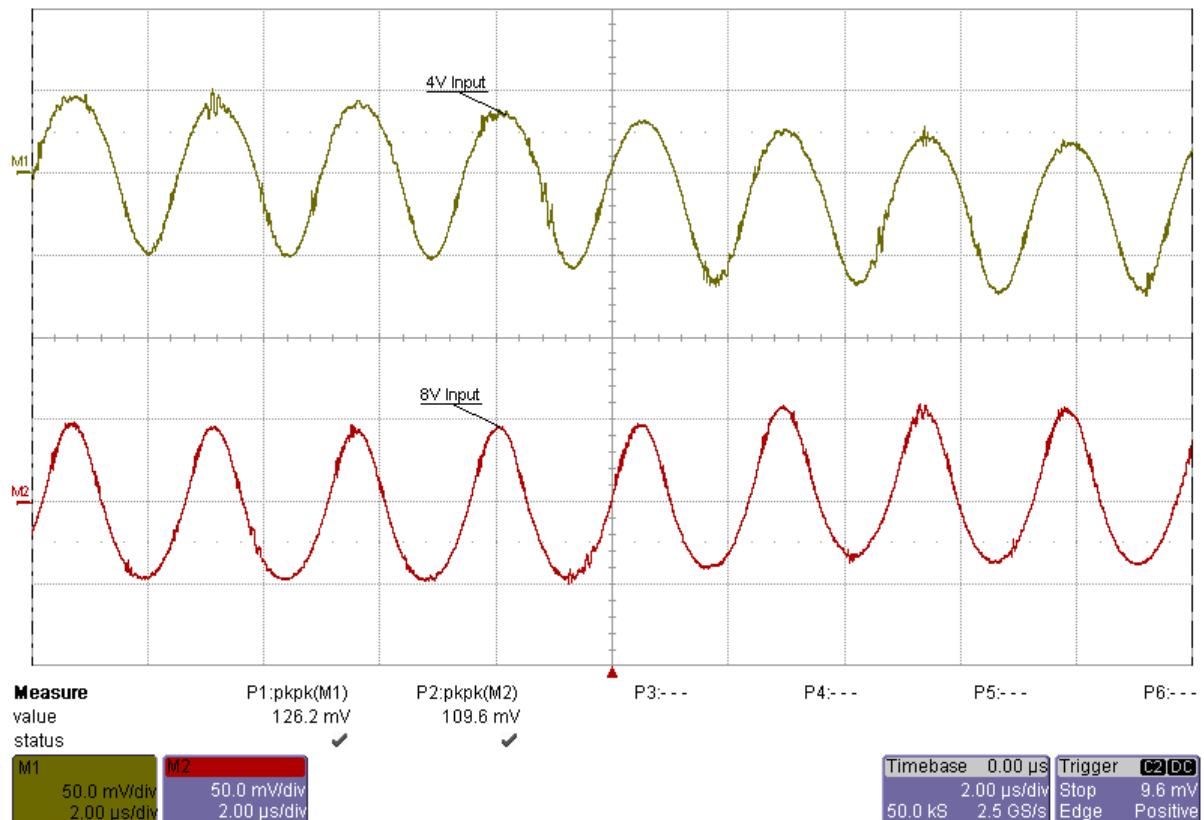


Figure 8



## 8. Output Ripple

The output ripple voltage is shown in Figure 9.

Channel M1 **Output Voltage @ 4.0V Input / 3.0A Load**, 172mV peak-peak (1.6%)  
50mV/div, 2us/div

Channel M2 **Output Voltage @ 8.0V Input / 3.0A Load**, 80mV peak-peak (0.8%)  
50mV/div, 2us/div

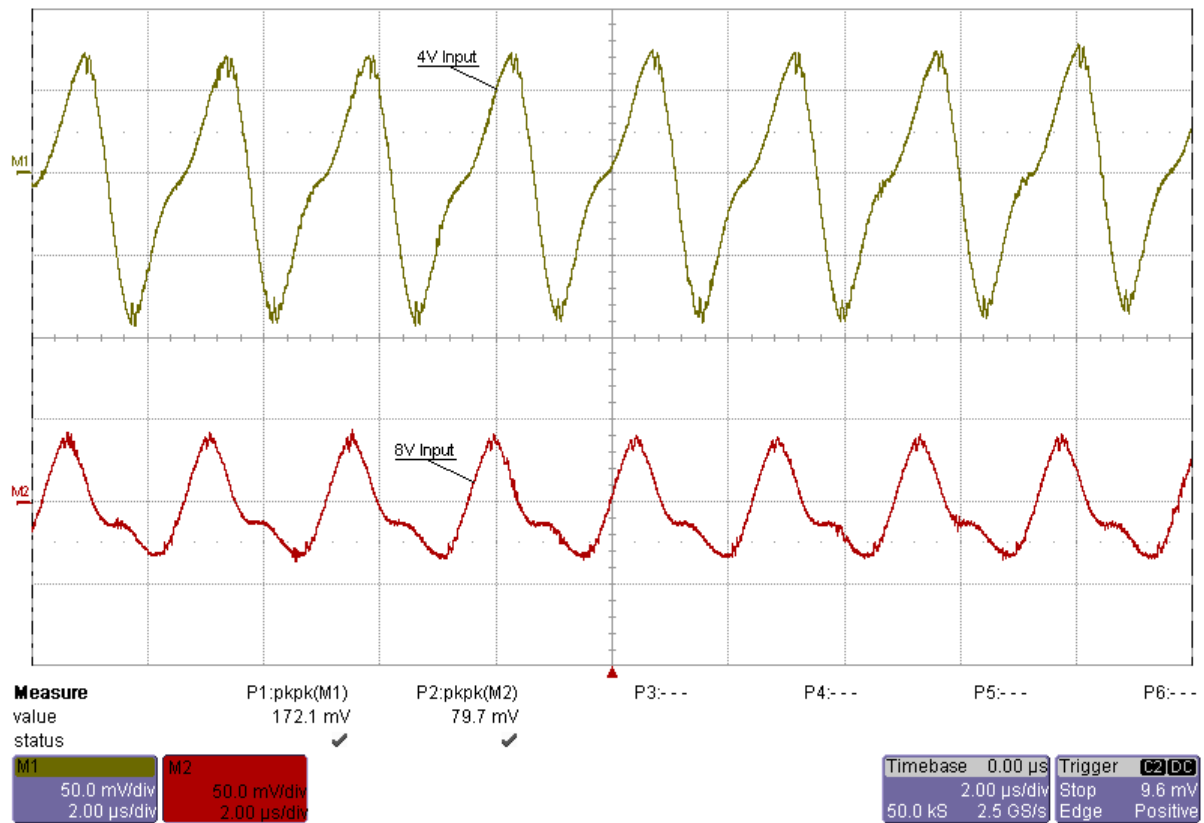


Figure 9

## 9. Low-Side FET (Switching Node)

The drain-source voltage of the low-side FET at 4.0V input voltage and 3.0A load on the output is shown in Figure 10.

Channel C1 **Drain-Source Voltage**, -0.4V minimum, 15.0V maximum  
5V/div, 1us/div

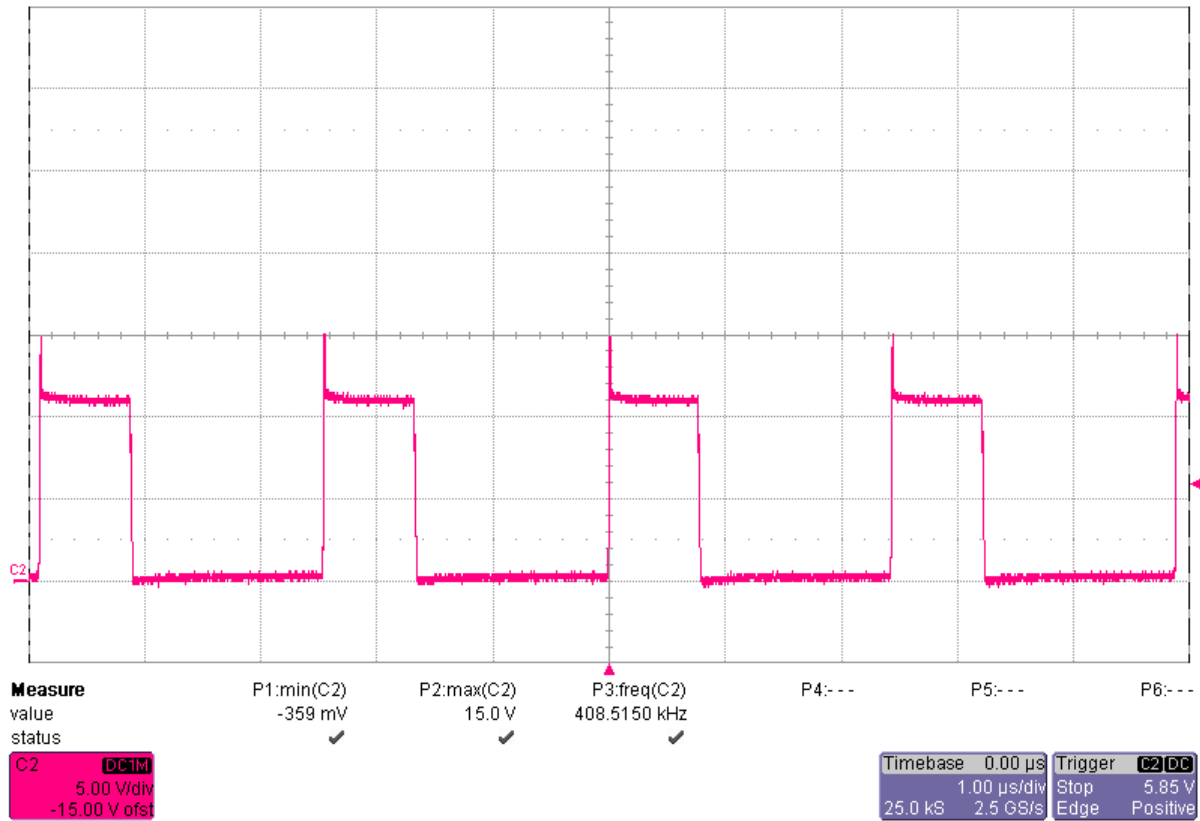


Figure 10

## 10.Diode

The voltage on the diode at 4.0V input voltage and 3.0A load on the output is shown in Figure 11.

Channel C1 **Anode-Cathode Voltage**, -1.4V minimum, 10.9V maximum  
2V/div, 1us/div

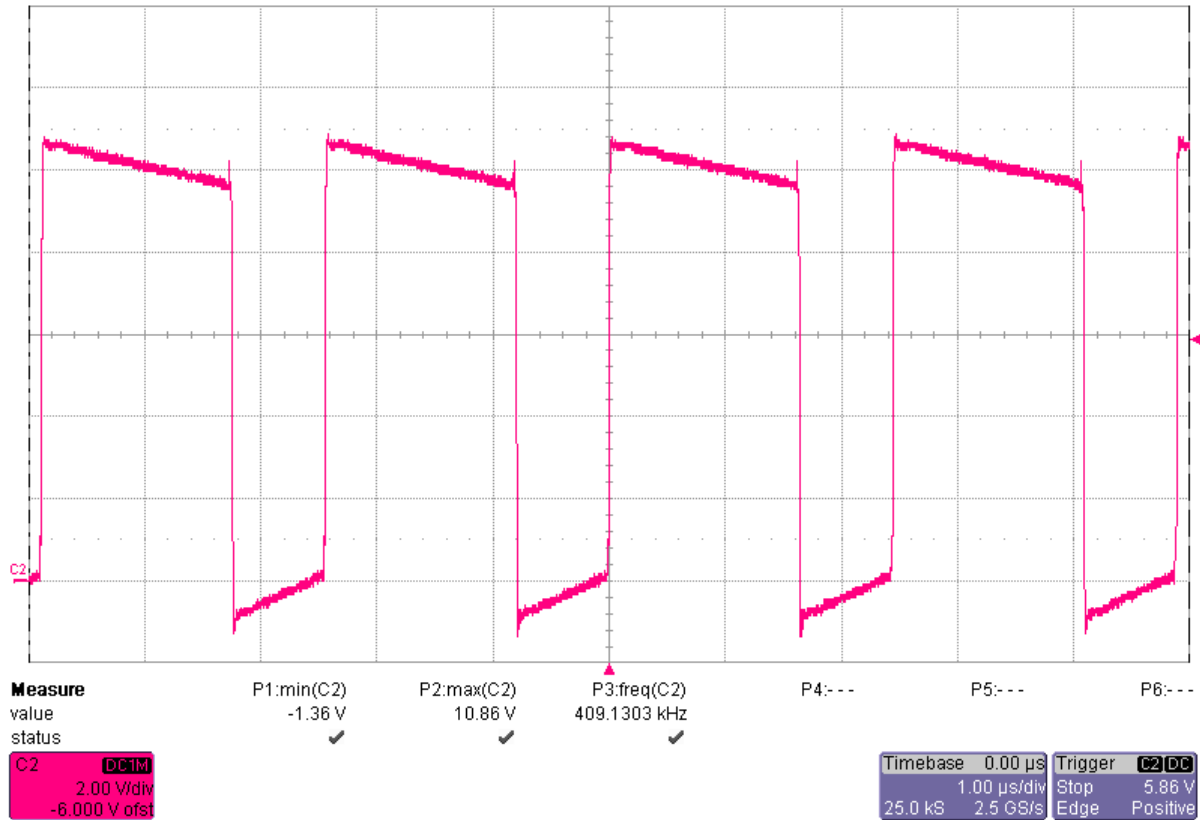


Figure 11

## PMP30236 Rev.C – Test Report

### 11. Cold Start Test Pulse “severe”

The response to the cold start test pulse “severe” at 3.0A load is shown in Figure 12.

Channel C1 **Battery Voltage**, dropping from 11.0V to 2.7V within 1ms

2V/div, 5ms/div

Channel C2 **Booster Output Voltage**

2V/div, 5ms/div

Channel C4 **Inductor Current**

5A/div, 5ms/div

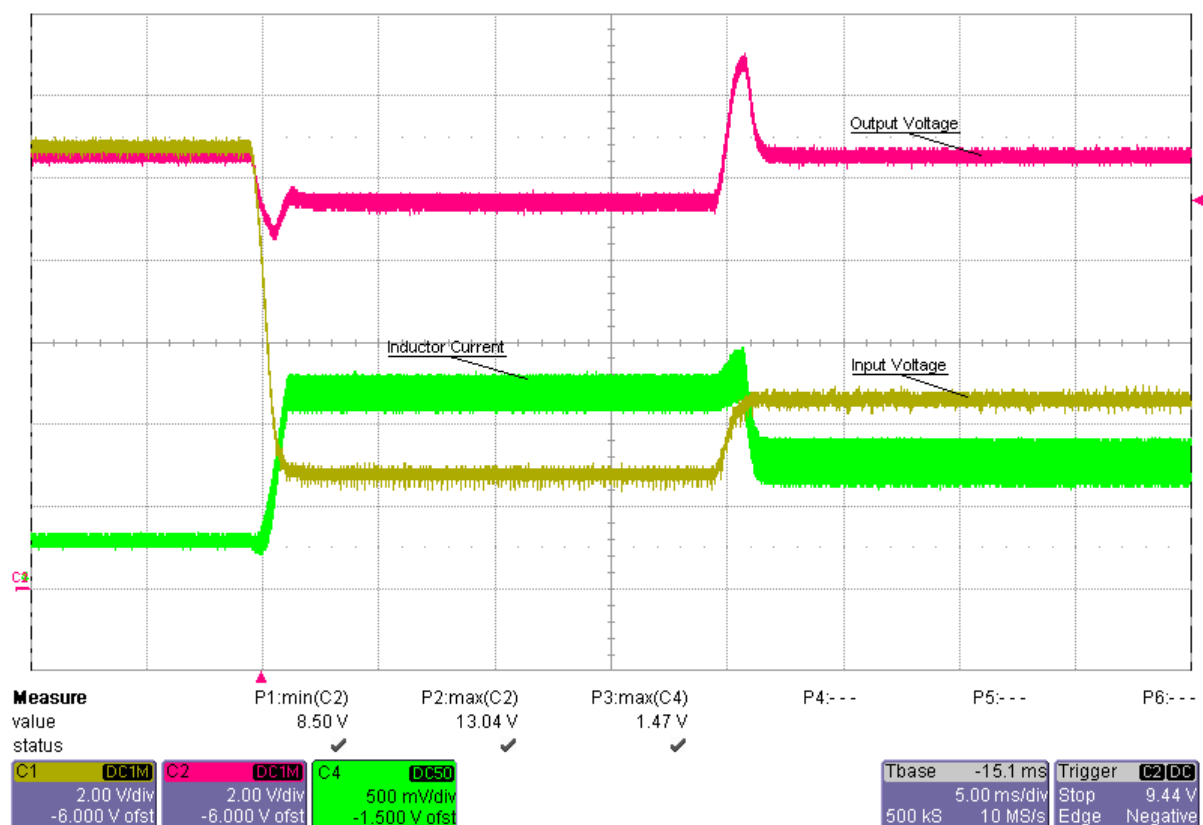


Figure 12

PMP30236 Rev.C – Test Report

Channel C1 **Battery Voltage**  
2V/div, 500ms/div

Channel C2 **Booster Output Voltage**  
2V/div, 500ms/div

Channel C4 **Inductor Current**  
5A/div, 500ms/div

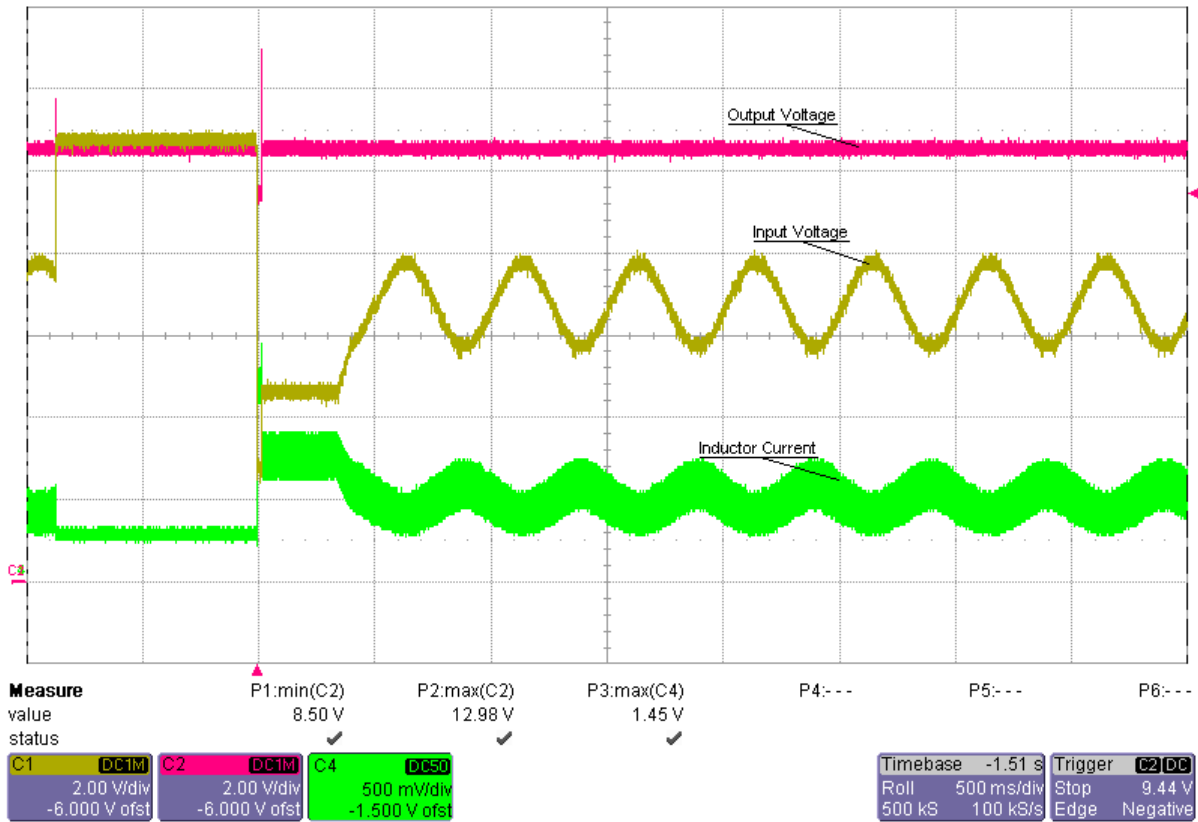


Figure 13

## 12. Thermal Image

The thermal image (Figure 14) shows the circuit at an ambient temperature of 20°C with an input voltage of 6.0V and 3.0A load on the output.

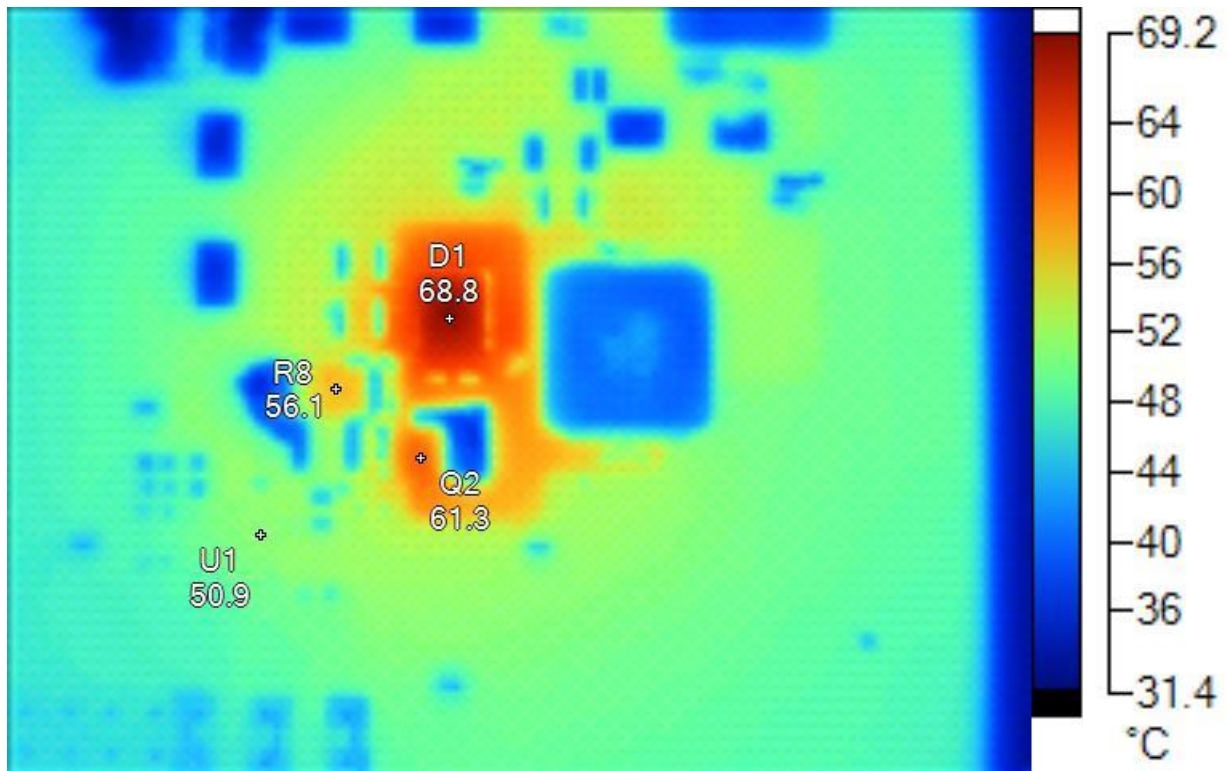


Figure 14

Name	Temperature	Emissivity	Background
Q2	61.3°C	0.95	20.0°C
D1	68.8°C	0.95	20.0°C
R8	56.1°C	0.95	20.0°C
U1	50.9°C	0.95	20.0°C

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated