


#### **FEATURES**

- Controlled Baseline
  - One Assembly/Test Site, One Fabrication Site
- Extended Temperature Performance of –55°C to 125°C
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree (1)
- 2-V to 5.5-V V<sub>CC</sub> Operation
- Max t<sub>nd</sub> of 6.5 ns at 5 V
- Typical V<sub>OLP</sub> (Output Ground Bounce)
   <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot)
   >2.3 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Supports Mixed-Mode Voltage Operation on All Ports
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- (1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)



#### DESCRIPTION/ORDERING INFORMATION

This octal buffer/line driver is designed for 2-V to 5.5-V V<sub>CC</sub> operation.

The SN74LV244A-EP is designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

The device is organized as two 4-bit line drivers with separate output-enable  $(\overline{OE})$  inputs. When  $\overline{OE}$  is low, the device passes data from the A inputs to the Y outputs. When  $\overline{OE}$  is high, the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using  $I_{\text{off}}$ . The  $I_{\text{off}}$  circuitry disables the outputs, preventing damaging current backflow through the devices when they are powered down.

## ORDERING INFORMATION

T <sub>A</sub>	PACKAG	SE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING		
–55°C to 125°C	SOIC - DW	Reel of 2000	SN74LV244AMDWREP	LV244AMEP		

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



# FUNCTION TABLE (EACH BUFFER)

INP	OUTPUT	
ŌĒ	Α	Y
L	Н	Н
L	L	L
Н	Χ	Z

## **LOGIC DIAGRAM (POSITIVE LOGIC)**

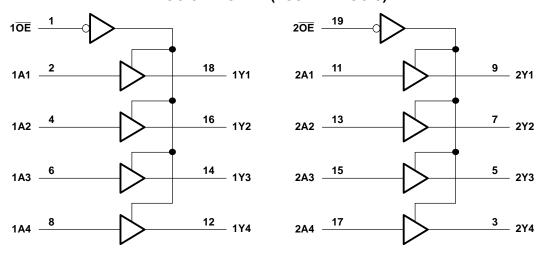

# Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range		-0.5	7	V
VI	Input voltage range <sup>(2)</sup>	-0.5	7	V	
Vo	Voltage range applied to any output in the high-imp	-0.5	7	V	
Vo	Output voltage range applied in the high or low sta	-0.5	V <sub>CC</sub> + 0.5	V	
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-20	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		<b>–</b> 50	mA
Io	Continuous output current	$V_O = 0$ to $V_{CC}$		±35	mA
	Continuous current through V <sub>CC</sub> or GND		±70	mA	
$\theta_{JA}$	Package thermal impedance (4)		58	°C/W	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>(2)</sup> The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> This value is limited to 5.5 V maximum.

<sup>(4)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.





# Recommended Operating Conditions<sup>(1)</sup>

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		2	5.5	V	
		V <sub>CC</sub> = 2 V	1.5			
\/	High level input voltage	V <sub>CC</sub> = 2.3 V to 2.7 V	$V_{CC} \times 0.7$		V	
$V_{IH}$	High-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V	$V_{CC} \times 0.7$		V	
		V <sub>CC</sub> = 4.5 V to 5.5 V	$V_{CC} \times 0.7$			
		V <sub>CC</sub> = 2 V		0.5		
\/	Low level input valtage	V <sub>CC</sub> = 2.3 V to 2.7 V		$V_{CC} \times 0.3$	V	
$V_{IL}$	Low-level input voltage	V <sub>CC</sub> = 3 V to 3.6 V		$V_{CC} \times 0.3$	V	
		V <sub>CC</sub> = 4.5 V to 5.5 V		$V_{CC} \times 0.3$		
VI	Input voltage		0	5.5	V	
V	Output valtage	High or low state	0	V <sub>CC</sub>	V	
Vo	Output voltage	3-state	0	5.5	v	
		V <sub>CC</sub> = 2 V		-50	μΑ	
	High level output ourrent	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		-2		
I <sub>OH</sub>	High-level output current	$V_{CC} = 3 \text{ V to } 3.6 \text{ V}$		-8	mA	
		V <sub>CC</sub> = 4.5 V to 5.5 V		-16		
		V <sub>CC</sub> = 2 V		50	μΑ	
	Low-level output current	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		2		
l <sub>OL</sub>	Low-level output current	$V_{CC} = 3 \text{ V to } 3.6 \text{ V}$		8	mA	
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		16		
		V <sub>CC</sub> = 2.3 V to 2.7 V		200		
$\Delta t/\Delta v$	Input transition rise or fall rate	V <sub>CC</sub> = 3 V to 3.6 V		100	ns/V	
		V <sub>CC</sub> = 4.5 V to 5.5 V		20		
T <sub>A</sub>	Operating free-air temperature		-55	125	°C	

<sup>(1)</sup> All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

SCLS695-JANUARY 2006



## **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP	MAX	UNIT	
	$I_{OH} = -50 \mu A$	2 V to 5.5 V	V <sub>CC</sub> - 0.1				
\/	$I_{OH} = -2 \text{ mA}$	2.3 V	2			V	
V <sub>OH</sub>	$I_{OH} = -8 \text{ mA}$	3 V	2.48			V	
	I <sub>OH</sub> = -16 mA	4.5 V	3.8				
	I <sub>OL</sub> = 50 μA	2 V to 5.5 V			0.1		
\/	I <sub>OL</sub> = 2 mA	2.3 V			0.4	V	
V <sub>OL</sub>	I <sub>OL</sub> = 8 mA	3 V			0.44	V	
	I <sub>OL</sub> = 16 mA	4.5 V			0.55		
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND	0 to 5.5 V			±1	μΑ	
I <sub>OZ</sub>	$V_O = V_{CC}$ or GND	5.5 V			±5	μΑ	
I <sub>cc</sub>	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			20	μΑ	
l <sub>off</sub>	$V_I$ or $V_O = 0$ to 5.5 V	0			5	μΑ	
C <sub>i</sub>	$V_{I} = V_{CC}$ or GND	3.3 V		2.3		pF	

## **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{\text{CC}}$  = 2.5 V  $\pm$  0.2 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	Т	<sub>A</sub> = 25°C		MIN	MAX	UNIT
FARAWETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIIN	WAX	UNII
t <sub>pd</sub>	Α	Y			9.5	15.3	1	18	ns
t <sub>en</sub>	ŌĒ	Y	C 50 pF		10.8	17.8	1	21	ns
t <sub>dis</sub>	ŌĒ	Y	$C_L = 50 \text{ pF}$		13.4	19.2	1	21	ns
t <sub>sk(o)</sub>						2		2	ns

## **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC}$  = 3.3 V  $\pm$  0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	T <sub>A</sub> = 25°C			MIN	MAX	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	IVIIIN	WAX	Oldi
t <sub>pd</sub>	Α	Y			6.8	11.9	1	13.5	ns
t <sub>en</sub>	ŌĒ	Y	C 50 5 5		7.8	14.1	1	16	ns
t <sub>dis</sub>	ŌĒ	Υ	$C_L = 50 \text{ pF}$		11	16	1	18	ns
t <sub>sk(o)</sub>						1.5		1.5	ns





## **Switching Characteristics**

over recommended operating free-air temperature range,  $V_{CC}$  = 5 V  $\pm$  0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	LOAD	T,	$T_A = 25^{\circ}C$			MAX	UNIT
PARAMETER	(INPUT)	(OUTPUT)	CAPACITANCE	MIN	TYP	MAX	MIN	IVIAA	ONT
t <sub>pd</sub>	Α	Y			4.9	7.5	1	8.5	ns
t <sub>en</sub>	ŌĒ	Y	C 50 pF		5.6	9.3	1	10.5	ns
t <sub>dis</sub>	ŌĒ	Y	$C_L = 50 \text{ pF}$		8.8	14.2	1	15.5	ns
t <sub>sk(o)</sub>						1		1	ns

# Noise Characteristics<sup>(1)</sup>

 $V_{CC}$  = 3.3 V,  $C_L$  = 50 pF,  $T_A$  = 25°C

	PARAMETER	MIN	TYP	MAX	UNIT
$V_{OL(P)}$	Quiet output, maximum dynamic V <sub>OL</sub>		0.55		V
$V_{OL(V)}$	Quiet output, minimum dynamic V <sub>OL</sub>		-0.5		٧
$V_{OH(V)}$	Quiet output, minimum dynamic V <sub>OH</sub>		2.9		٧
$V_{IH(D)}$	High-level dynamic input voltage	2.31			٧
$V_{IL(D)}$	Low-level dynamic input voltage			0.99	٧

<sup>(1)</sup> Characteristics are for surface-mount packages only.


## **Operating Characteristics**

 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CO	NDITIONS	V <sub>CC</sub>	TYP	UNIT
0	Dower dissination conscitones	C 50 pF	f = 10 MHz	3.3 V	14	pF
$C_{pd}$	Power dissipation capacitance	$C_L = 50 \text{ pF},$	I = IU MIMZ	5 V	16	



#### PARAMETER MEASUREMENT INFORMATION

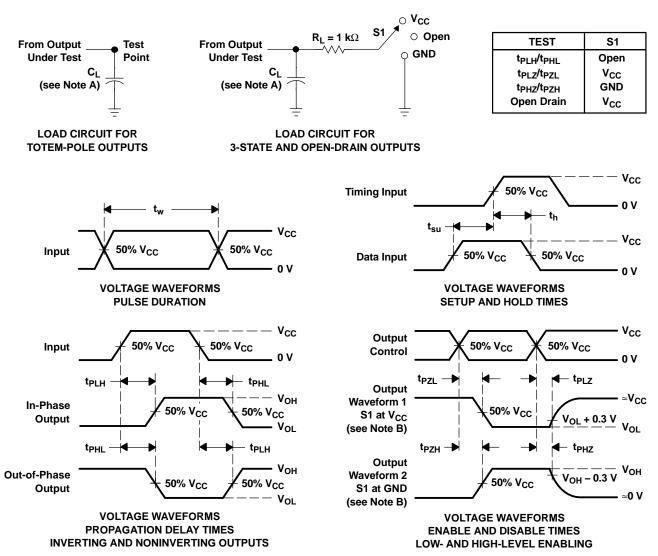

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_r \leq$  3 ns,  $t_f \leq$  3 ns.
- D. The outputs are measured one at a time, with one input transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G.  $t_{PHL}$  and  $t_{PLH}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuits and Voltage Waveforms



www.ti.com 31-Oct-2024

#### PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing		Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				
SN74LV244AMDWREP	OBSOLETE	SOIC	DW	20		TBD	Call TI	Call TI	-55 to 125	LV244AMEP	

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LV244A-EP:

## **PACKAGE OPTION ADDENDUM**

www.ti.com 31-Oct-2024

● Catalog : SN74LV244A

Automotive: SN74LV244A-Q1

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects



SOIC



#### NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated