## SN74LVC74A-EP DUAL POSITIVE EDGE TRIGGERED D-TYPE FLIP-FLOP WITH CLEAR AND PRESET


SCAS751C-DECEMBER 2003-REVISED SEPTEMBER 2007

#### **FEATURES**

- Controlled Baseline
  - One Assembly/Test Site, One Fabrication Site
- Extended Temperature Performance of –40°C to 125°C and –55°C to 125°C
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree (1)
- Operates From 2 V to 3.6 V
- (1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

- Inputs Accept Voltages to 5.5 V
- Max t<sub>pd</sub> of 5.2 ns at 3.3 V
- Typical V<sub>OLP</sub> (Output Ground Bounce) <0.8 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C
- Typical V<sub>OHV</sub> (Output V<sub>OH</sub> Undershoot) >2 V at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C

#### D OR PW PACKAGE (TOP VIEW)



### **DESCRIPTION/ORDERING INFORMATION**

The SN74LVC74A dual positive-edge-triggered D-type flip-flop is designed for 2.7-V to 3.6-V V<sub>CC</sub> operation.

A low level at the preset  $(\overline{PRE})$  or clear  $(\overline{CLR})$  inputs sets or resets the outputs, regardless of the levels of the other inputs. When  $\overline{PRE}$  and  $\overline{CLR}$  are inactive (high), data at the data (D) input meeting the setup time requirements is transferred to the outputs on the positive-going edge of the clock pulse. Clock triggering occurs at a voltage level and is not directly related to the rise time of the clock pulse. Following the hold-time interval, data at the D input can be changed without affecting the levels at the outputs.

Inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of this device as a translator in a mixed 3.3 V/5 V system environment.

## ORDERING INFORMATION(1)

T <sub>A</sub>	PACK	(AGE <sup>(2)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 125°C	SOIC - D	Reel of 2500	SN74LVC74AQDREP	LVC74AE
-40 C to 125 C	TSSOP – PW	Reel of 2000	SN74LVC74AQPWREP	LVC74AE
–55°C to 125°C	SOIC - D	Reel of 2500	SN74LVC74AMDREP	LVC74AM
-55 0 10 125 0	TSSOP – PW	Reel of 2000	SN74LVC74AMPWREP	LVC74AM

For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI
website at www.ti.com.

(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SCAS751C-DECEMBER 2003-REVISED SEPTEMBER 2007




### **FUNCTION TABLE**

	INP	UTS		OUTI	PUTS
PRE	CLR	CLK	D	Q	Q
L	Н	Χ	Χ	Н	L
Н	L	X	Χ	L	Н
L	L	Χ	Χ	H <sup>(1)</sup>	H <sup>(1)</sup>
Н	Н	<b>↑</b>	Н	Н	L
Н	Н	<b>↑</b>	L	L	Н
Н	Н	L	Χ	$Q_0$	$\overline{Q}_0$

(1) This configuration is nonstable; that is, it does not persist when PRE or CLR returns to its inactive (high) level.

## LOGIC DIAGRAM, EACH FLIP-FLOP (POSITIVE LOGIC)

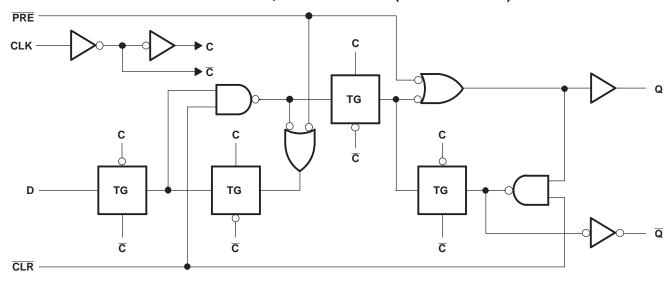



## SN74LVC74A-EP DUAL POSITIVE EDGE TRIGGERED D-TYPE FLIP-FLOP WITH CLEAR AND PRESET

SCAS751C-DECEMBER 2003-REVISED SEPTEMBER 2007

## **Absolute Maximum Ratings**(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage range	-0.5	6.5	V	
$V_{I}$	Input voltage range (2)		-0.5	6.5	V
Vo	Output voltage range (2)(3)		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
IO	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
Δ	Package thermal impedance (4)	D package		86	°C/W
$\theta_{JA}$	rackage memai impedance.	PW package		113	C/VV
T <sub>stg</sub>	Storage temperature range		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## Recommended Operating Conditions(1)

			MIN	MAX	UNIT
V	Cumply yeltore	Operating	2	3.6	V
V <sub>CC</sub>	Supply voltage	Data retention only	1.5		V
V <sub>IH</sub>	High-level input voltage $V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$		2		V
V <sub>IL</sub>	Low-level input voltage	V <sub>CC</sub> = 2.7 V to 3.6 V		0.8	V
VI	Input voltage		0	5.5	V
Vo	Output voltage		0	$V_{CC}$	V
	High level cutout current	V <sub>CC</sub> = 2.7 V		-12	mA
I <sub>OH</sub>	High-level output current	$V_{CC} = 3 V$		-24	mA
	Law lavel autout augreet	V <sub>CC</sub> = 2.7 V		12	A
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 3 V		24	mA
Δt/Δν	Input transition rise or fall rate	·		10	ns/V
т	Operating free dir temperature	M suffix	-55	125	°C
$T_A$	Operating free-air temperature	Q suffix		125	-0


<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

<sup>(2)</sup> The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The value of V<sub>CC</sub> is provided in the recommended operating conditions table.

<sup>(4)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.

## SN74LVC74A-EP DUAL POSITIVE EDGE TRIGGERED D-TYPE FLIP-FLOP WITH CLEAR AND PRESET





### **Electrical Characteristics**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT
	$I_{OH} = -100 \mu A$	2.7 V to 3.6 V	V <sub>CC</sub> - 0.2		
V	I - 12 mA	2.7 V	2.2		V
V <sub>OH</sub>	$I_{OH} = -12 \text{ mA}$	3 V	2.4		V
	$I_{OH} = -24 \text{ mA}$	3 V	2.2		
	$I_{OL} = 100 \ \mu A$	2.7 V to 3.6 V		0.2	
V <sub>OL</sub>	$I_{OL} = 12 \text{ mA}$	2.7 V		0.4	V
	$I_{OL} = 24 \text{ mA}$	3 V		0.55	
I <sub>I</sub>	$V_I = 5.5 \text{ V or GND}$	3.6 V		±5	μΑ
I <sub>CC</sub>	$V_I = V_{CC}$ or GND, $I_O = 0$	3.6 V		10	μA
ΔI <sub>CC</sub>	One input at $V_{CC}$ – 0.6 V, Other inputs at $V_{CC}$ or GND	2.7 V to 3.6 V		500	μΑ
C <sub>i</sub>	$V_I = V_{CC}$ or GND	3.3 V		5	рF

<sup>(1)</sup> All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C.

## **Timing Requirements**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

			V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = ± 0.3	UNIT	
			MIN	MAX	MIN	MAX	
f <sub>clock</sub>	Clock frequency			83		100	MHz
	Pulse duration	PRE or CLR low	3.3		3.3		20
t <sub>w</sub>	ruise duration	CLK high or low			3.3		ns
	Setup time before CLK↑	Data	3.4		3		20
t <sub>su</sub>	Setup time before CER	PRE or CLR inactive			2		ns
t <sub>h</sub>	Hold time, data after CLK↑		1		1		ns

## **Switching Characteristics**

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = 3 ± 0.3	3.3 V 3 V	UNIT
	(INPUT)	(001701)	MIN	MAX	MIN	MAX	
f <sub>max</sub>			83		100		MHz
	CLK	Q or Q		6	1	5.2	20
<b>¹</b> pd	PRE or CLR	Q OI Q		6.4	1	5.4	ns


# **Operating Characteristics**

 $T_A = 25^{\circ}C$ 

	PARAMETER	TEST CONDITIONS	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance per flip-flop	f = 10 MHz	47	51	pF




#### PARAMETER MEASUREMENT INFORMATION

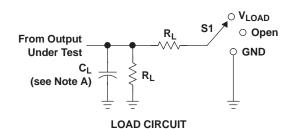

TEST	S1
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	V <sub>LOAD</sub>
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

,,	INF	PUTS	.,	V		-	W
V <sub>CC</sub>	VI	t <sub>r</sub> /t <sub>f</sub>	V <sub>M</sub>	$V_{LOAD}$	CL	$R_L$	$V_{\Delta}$
2.7 V 3.3 V ± 0.3 V	2.7 V 2.7 V	≤2.5 ns ≤2.5 ns	1.5 V 1.5 V	6 V 6 V	50 pF	<b>500</b> Ω <b>500</b> Ω	0.3 V 0.3 V
3.3 V ± 0.3 V	2.7 V	≥2.5 NS	1.5 V	οV	50 pF	200 7	U.3 V

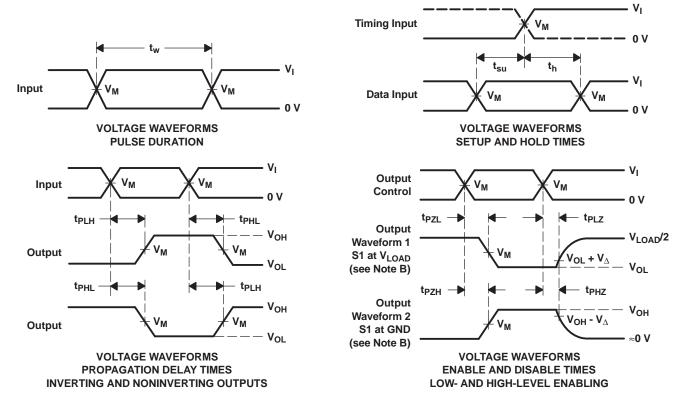

- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{O}$  = 50  $\Omega$
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
  - F. t<sub>PZI</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
  - H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms





10-Dec-2020

#### PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				
SN74LVC74AMDREP	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	LVC74AM	Samples
SN74LVC74AMPWREP	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	LVC74AM	Samples
SN74LVC74AQDREP	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC74AE	Samples
SN74LVC74AQPWREP	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC74AE	Samples
V62/04669-01XE	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC74AE	Samples
V62/04669-01YE	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC74AE	Samples
V62/04669-02XE	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	LVC74AM	Samples
V62/04669-02YE	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	LVC74AM	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



## PACKAGE OPTION ADDENDUM



10-Dec-2020

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN74LVC74A-EP:

Catalog: SN74LVC74A

Automotive: SN74LVC74A-Q1

Military: SN54LVC74A

#### NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Automotive Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military QML certified for Military and Defense Applications

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 10-Jan-2024

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC74AMDREP	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC74AMPWREP	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC74AQDREP	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC74AQPWREP	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1



www.ti.com 10-Jan-2024



#### \*All dimensions are nominal

7 III CHILOTOGU CHE TIETHING.									
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)		
SN74LVC74AMDREP	SOIC	D	14	2500	333.2	345.9	28.6		
SN74LVC74AMPWREP	TSSOP	PW	14	2000	356.0	356.0	35.0		
SN74LVC74AQDREP	SOIC	D	14	2500	340.5	336.1	32.0		
SN74LVC74AQPWREP	TSSOP	PW	14	2000	356.0	356.0	35.0		

# D (R-PDSO-G14)

## PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.



PW (R-PDSO-G14)

## PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.
- B. This drawing is subject to change without notice.
  - Sody length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
- E. Falls within JEDEC MO-153



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated