www.ti.com


SLOS468D -MAY 2005-REVISED AUGUST 2011

GENERAL-PURPOSE LOW-VOLTAGE COMPARATORS

Check for Samples: LMV331-Q1 SINGLE, LMV393-Q1 DUAL

FEATURES

- Qualified for Automotive Applications
- 2.7-V and 5-V Performance
- Low Supply Current
 - LMV331 . . . 60 μA Typ
 - LMV393 . . . 100 μA Typ
- Input Common-Mode Voltage Range Includes Ground
- Low Output Saturation Voltage . . . 200 mV Typ
- Open-Collector Output for Maximum Flexibility



DESCRIPTION/ORDERING INFORMATION

The LMV393-Q1 device is a low-voltage (2.7 V to 5.5 V) version of the dual and quad comparators, LM393 and LM339, which operate from 5 V to 30 V. The LMV331-Q1 is the single-comparator version.


The LMV331-Q1 and LMV393-Q1 are the most cost-effective solutions for applications where low-voltage operation, low power, space saving, and price are the primary specifications in circuit design for portable consumer products. These devices offer specifications that meet or exceed the familiar LM339 and LM393 devices at a fraction of the supply current.

ORDERING INFORMATION(1)

T _A		PACKAGE ⁽²⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING (3)
40°C to 405°C	Single	SOT23-5 – DBV	Reel of 3000	LMV331QDBVRQ1	LADQ
–40°C to 125°C	Dual	SOIC - D	Reel of 2500	LMV393QDRQ1	V393Q1

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.
- (3) DBV: The actual top-side marking has one additional character that designates the wafer fab/assembly site.

Figure 1. SYMBOL (EACH COMPARATOR)





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



Figure 2. SIMPLIFIED SCHEMATIC

VCC+

Q6

Q7


N1

IN
R1

R2

R3

GND



Absolute Maximum Ratings(1)

STRUMENTS

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC+}	Supply voltage ⁽²⁾			5.5	V
V_{ID}	Differential input voltage (3)			±5.5	V
VI	Input voltage range (either input)		0	5.5	V
		D (8-pin) package		97	
θ_{JA}	Package thermal impedance (4) (5)	ce ^{(4) (5)} D (14-pin) package		86	°C/W
		DBV package		206	
T_{J}	Operating virtual junction temperature			150	°C
T _{stg}	Storage temperature range		-65	150	°C

⁽¹⁾ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) All voltage values (except differential voltages and V_{CC+} specified for the measurement of I_{OS}) are with respect to the network GND.
- 3) Differential voltages are at IN+ with respect to IN-.
- (4) Maximum power dissipation is a function of T_J(max), θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is P_D = (T_J(max) T_A)/θ_{JA}. Selecting the maximum of 150°C can affect reliability.
- (5) The package thermal impedance is calculated in accordance with JESD 51-7.

Recommended Operating Conditions

		MIN	MAX	UNIT
V_{CC+}	Supply voltage (single-supply operation)	2.7	5.5	V
V_{OUT}	Output voltage		$V_{CC+} + 0.3$	V
T _A	Operating free-air temperature	-40	125	°C



Electrical Characteristics

at specified free-air temperature, $V_{CC+} = 2.7 \text{ V}$, GND = 0 V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT	
V_{IO}	Input offset voltage		25°C		1.7	7	mV	
αV_{IO}	Average temperature coefficient of input offset voltage		-40°C to 125°C		5		μV/°C	
	Innut bigg gurrant		25°C		10	250	~ Λ	
I _{IB}	Input bias current		-40°C to 125°C			400	nA	
	land offers assumed		25°C		5	50	nA	
I _{IO}	Input offset current		-40°C to 125°C			150	шА	
Io	Output current (sinking)	V _O ≤ 1.5 V	25°C	5	23		mA	
	Outrot leakens assument		25°C		0.003			
	Output leakage current		-40°C to 125°C			1	μA	
V _{ICR}	Common-mode input voltage range		25°C		-0.1 to 2		V	
V_{SAT}	Saturation voltage	I _O ≤ 1 mA	25°C		200		mV	
		LMV331			40	100		
I _{CC}	Supply current	LMV393 (both comparators)	25°C		70	140	μΑ	
		LMV339 (all four comparators)			140	200		

Switching Characteristics

 $T_A = 25^{\circ}C$, $V_{CC+} = 2.7$ V, $R_L = 5.1$ k Ω , GND = 0 V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP	UNIT
	Dropogation delay high to law level output quitahing	Input overdrive = 10 mV	1000	
t _{PHL}	Propagation delay, high- to low-level output switching	Input overdrive = 100 mV	350	ns
	Decreasing delection to high level output quitables	Input overdrive = 10 mV	500	
t _{PLH}	Propagation delay, low- to high-level output switching	Input overdrive = 100 mV	400	ns



Electrical Characteristics

at specified free-air temperature, $V_{CC+} = 5 \text{ V}$, GND = 0 V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	T _A	MIN	TYP	MAX	UNIT	
\ /	land offer trade of		25°C		1.7	7	\/	
V_{IO}	Input offset voltage		-40°C to 125°C			9	mV	
αV_{IO}	Average temperature coefficient of input offset voltage		25°C		5		μV/°C	
	land this account		25°C		25	250	^	
I _{IB}	Input bias current		-40°C to 125°C			400	nA	
	lanut offect ourrent		25°C		2	50	nA	
I _{IO}	Input offset current		-40°C to 125°C			150	IIA	
lo	Output current (sinking)	V _O ≤ 1.5 V	25°C	10	84		mA	
	Output lasks as summer		25°C		0.003			
	Output leakage current		-40°C to 125°C			1	μA	
V_{ICR}	Common-mode input voltage range		25°C		-0.1 to 4.2		V	
A_{VD}	Large-signal differential voltage gain		25°C	20	50		V/mV	
\ /	Catanatian caltana	1 < 4 0	25°C		200	400	\/	
V_{SAT}	Saturation voltage	I _O ≤ 4 mA	-40°C to 125°C			700	mV	
		LNN/224	25°C		60	120		
		LMV331	-40°C to 125°C			150		
	Cupply gurrant	LMV/202 (both comporators)	25°C		100	200	μА	
I _{CC}	Supply current	LMV393 (both comparators)	-40°C to 125°C			250		
		LMV/220 (all faur agent and and	25°C		170	300		
		LMV339 (all four comparators)	-40°C to 125°C			350		

Switching Characteristics

 $T_A = 25$ °C, $V_{CC+} = 5$ V, $R_L = 5.1$ k Ω , GND = 0 V (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	TYP	UNIT
	Dropogation delay high to law layer output quitables	Input overdrive = 10 mV		
^T PHL	Propagation delay, high- to low-level output switching	Input overdrive = 100 mV	200	ns
	Decreased as delevided to be being being a stand or stable as	Input overdrive = 10 mV	450	
t _{PLH}	Propagation delay, low- to high-level output switching	Input overdrive = 100 mV	300	ns



PACKAGE OPTION ADDENDUM

10-Dec-2020

PACKAGING INFORMATION

www.ti.com

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
LMV331QDBVRQ1	ACTIVE	SOT-23	DBV	5	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LADQ	Samples
LMV393QDRQ1	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	V393Q1	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



PACKAGE OPTION ADDENDUM

10-Dec-2020

OTHER QUALIFIED VERSIONS OF LMV331-Q1, LMV393-Q1:

● Catalog: LMV331, LMV393

www.ti.com

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 9-Mar-2024

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV331QDBVRQ1	SOT-23	DBV	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

PACKAGE MATERIALS INFORMATION

www.ti.com 9-Mar-2024

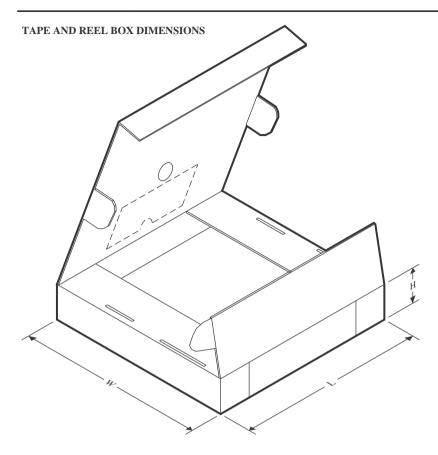

*All dimensions are nominal

	Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
I	LMV331QDBVRQ1	SOT-23	DBV	5	3000	200.0	183.0	25.0



SMALL OUTLINE TRANSISTOR



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
 2. This drawing is subject to change without notice.
 3. Reference JEDEC MO-178.

- 4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
- 5. Support pin may differ or may not be present.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE TRANSISTOR



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated